

UART, I2C, CAN and GPIOs

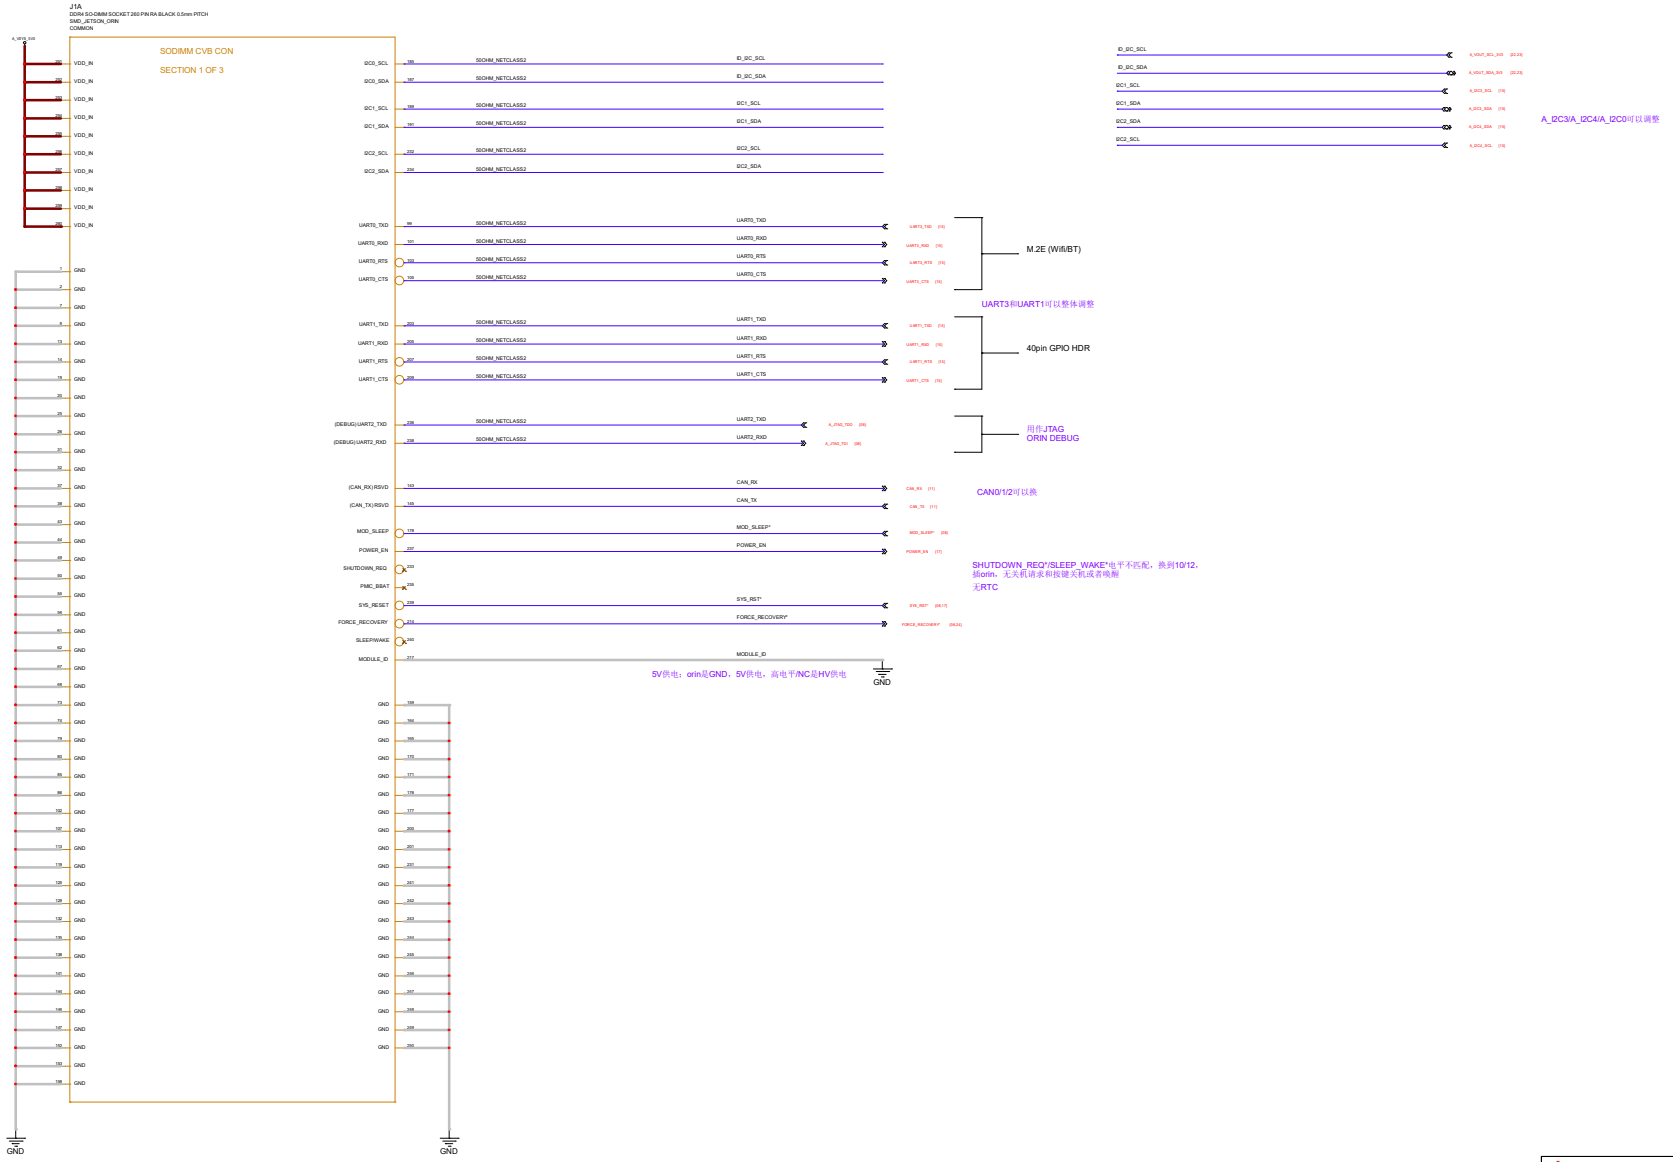

FuZhou X-Speed Information Technology Co.,Ltd


Title	01.SODIMM Connector 1_3		
Size: Custom	Product Model: RC01_CORE_V100-20260205	DESIGNER: JJF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 01 of 24		

GPIOs, USB2.0, I2S, SPI, GBe and CSI

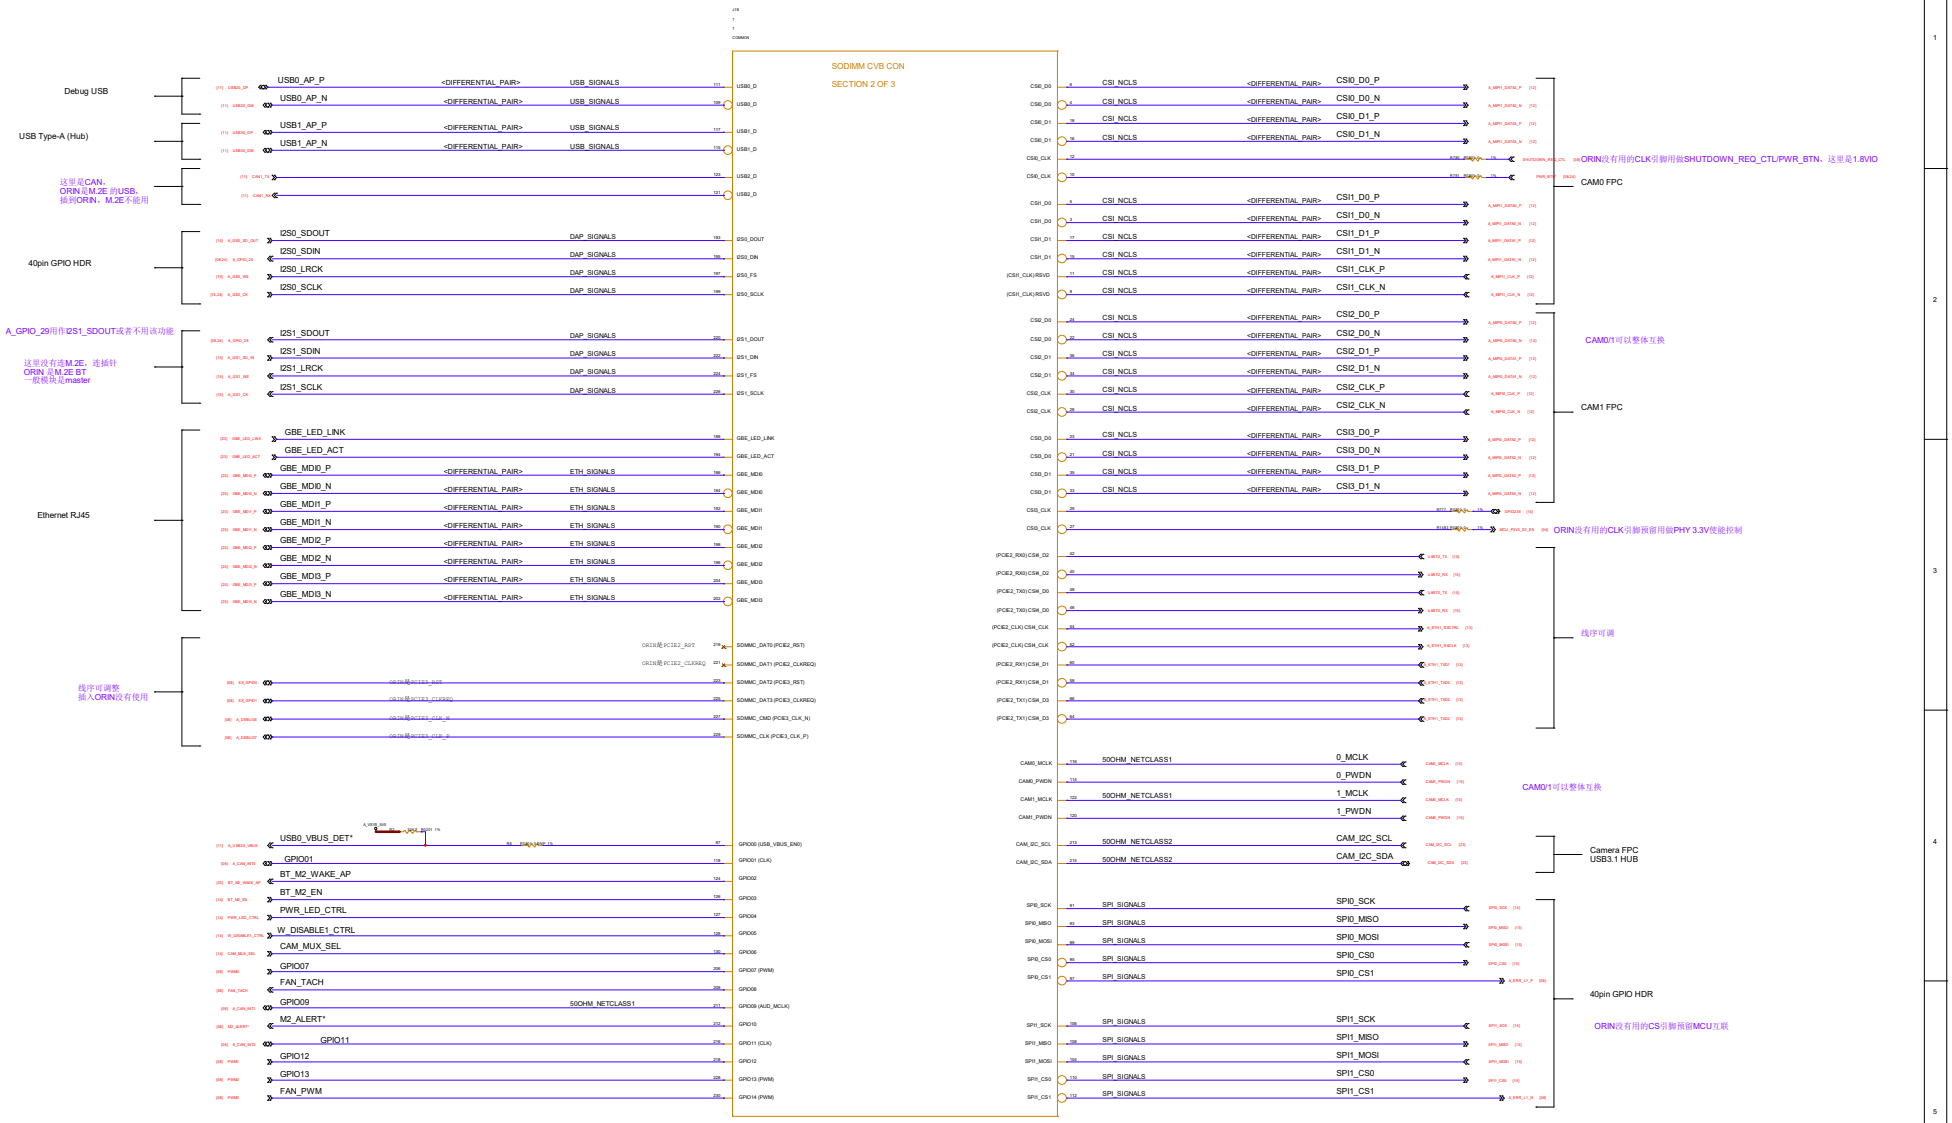


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 02.SODIMM Connector 2_3			
Size: Custom	Product Model: RC01_CORE_V100-20260205IJF	DESIGNER:	Rev: V001
Date: Thursday, February 05, 2026	Sheet 02	of 24	

DP, USBSS and PEX

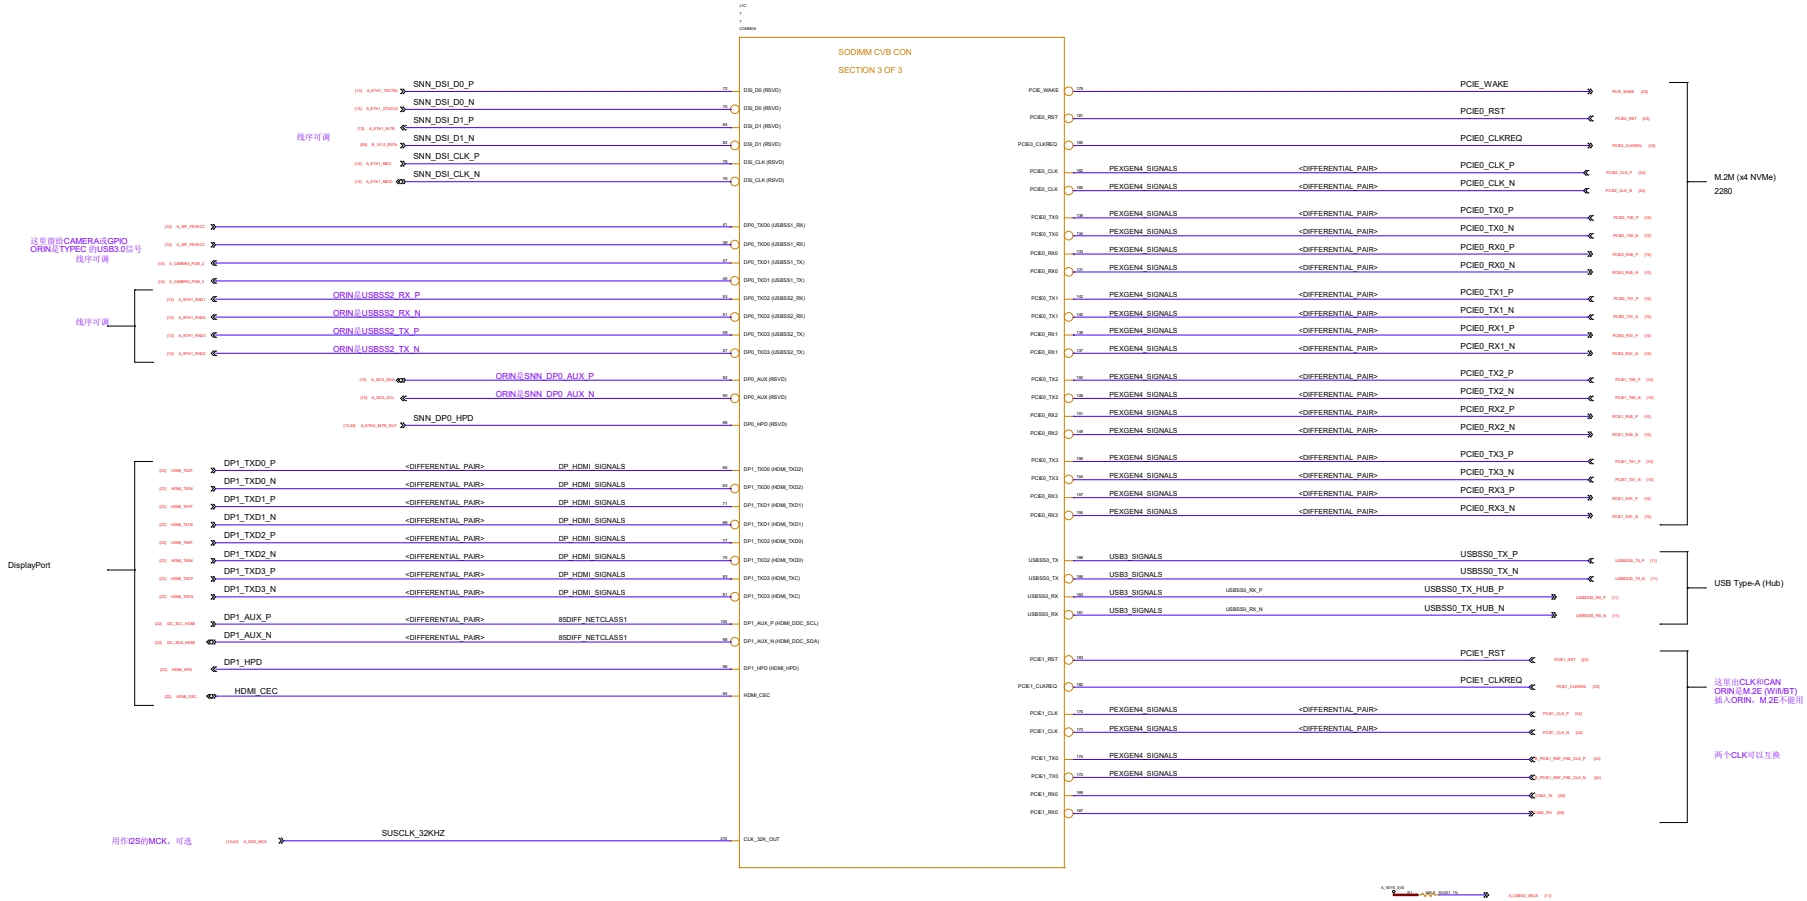

FuZhou X-Speed Information Technology Co.,Ltd			
Title: 03.SODIMM Connector 3_3			
Size: Custom	Product Model: RC01_CORE_V100-20260205IJF	DESIGNER	Rev: V001
Date: Thursday, February 05, 2026	Sheet 03 of 24		

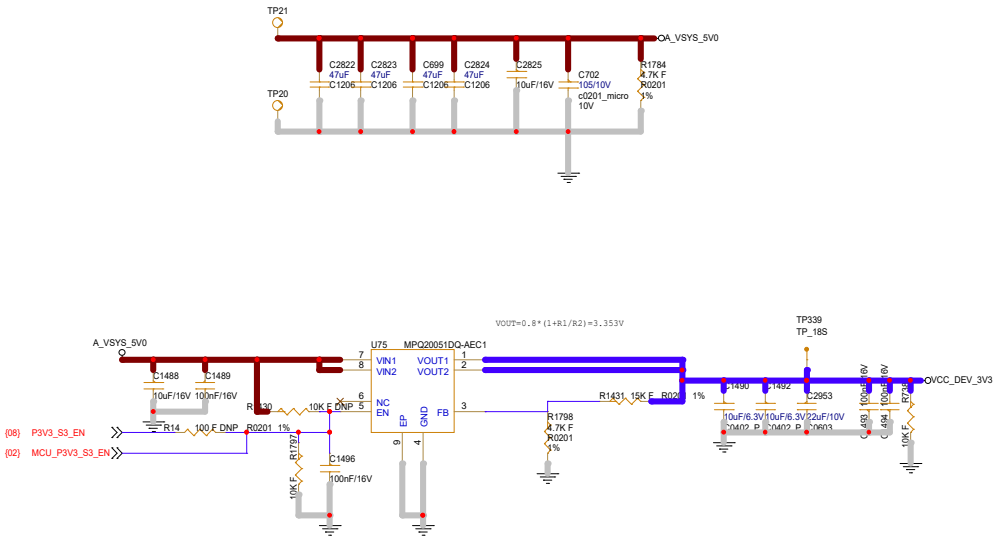

FuZhou X-Speed Information Technology Co.,Ltd			
Title: 04.DCIN & PWR			
Size: C	Product Model: RC01_CORE_V100-20260205-IJF	DESIGNER: IJF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 04 of 24		



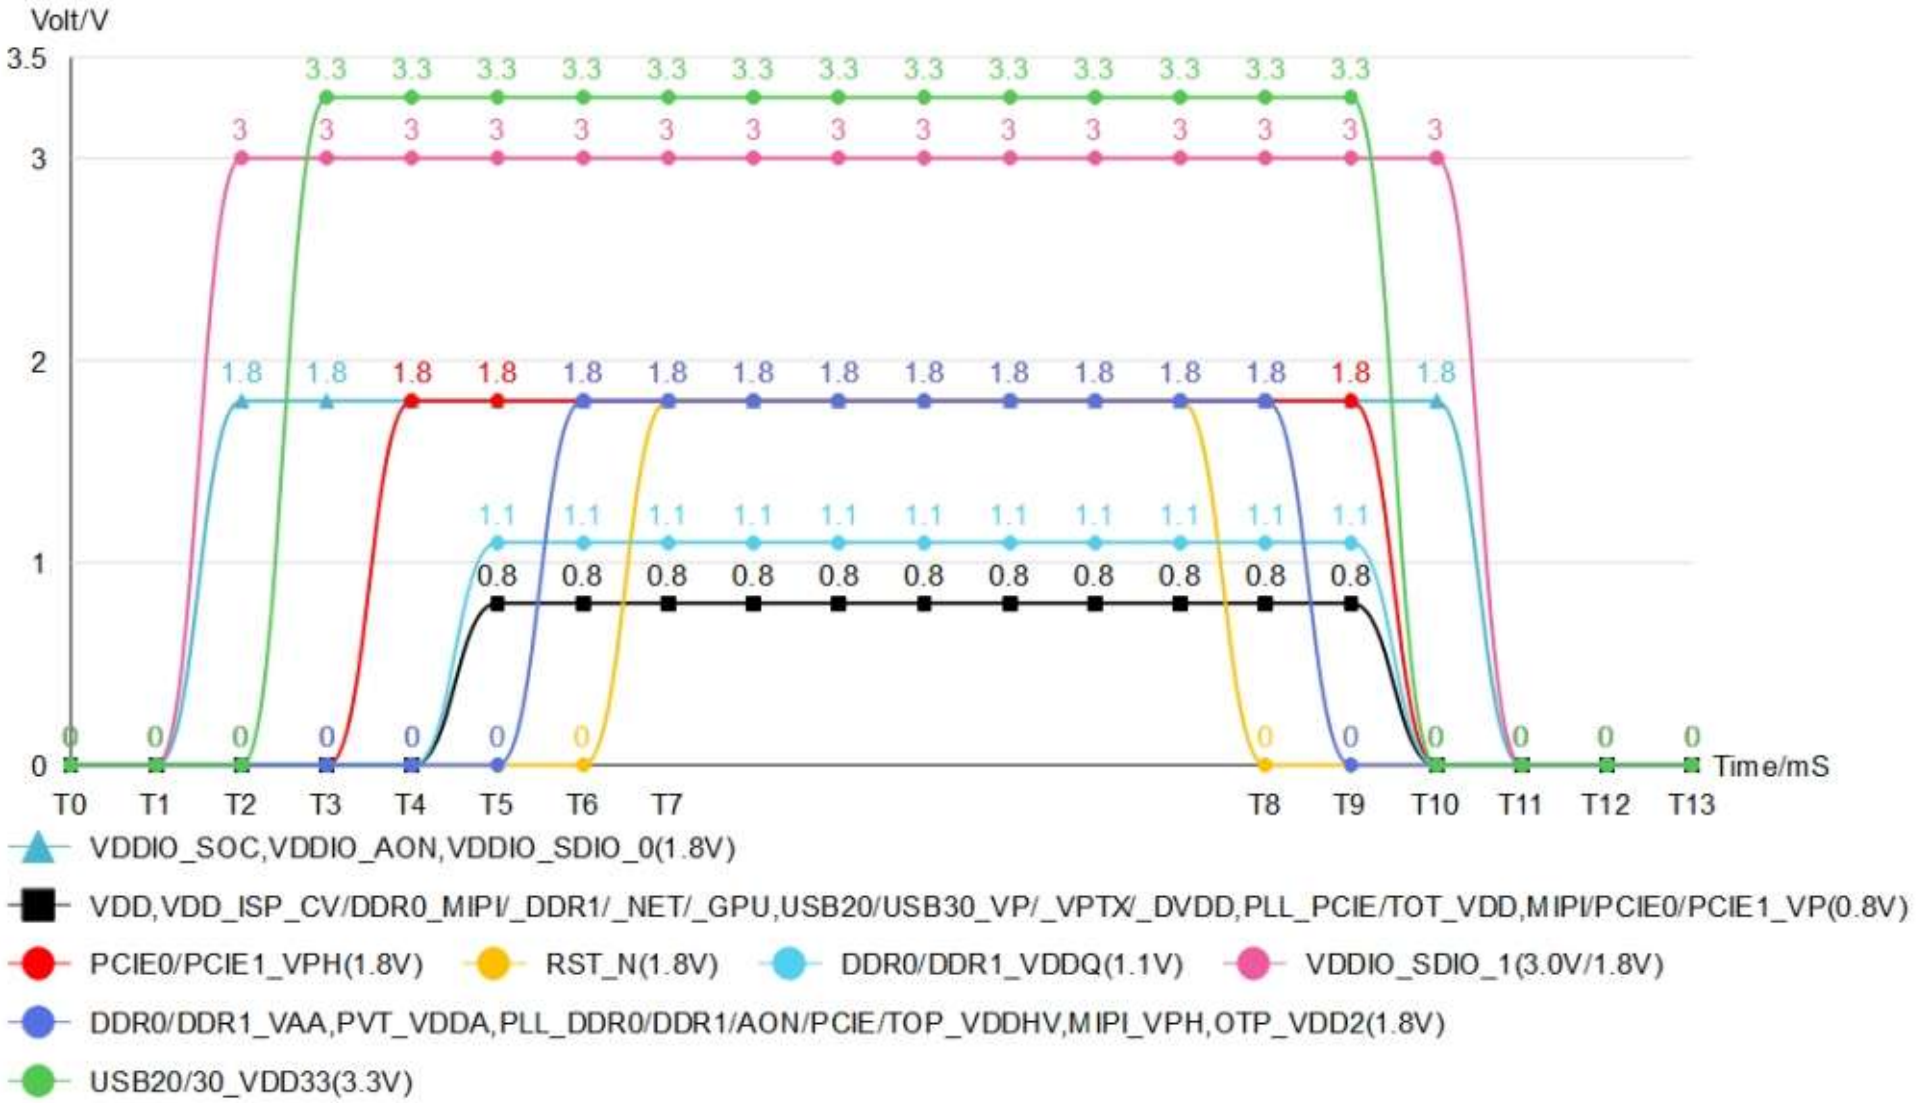



图 2- 1 A1000 系统电源上下电时序


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 05.Power Sequence			
Size: A4	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 05	of 24	

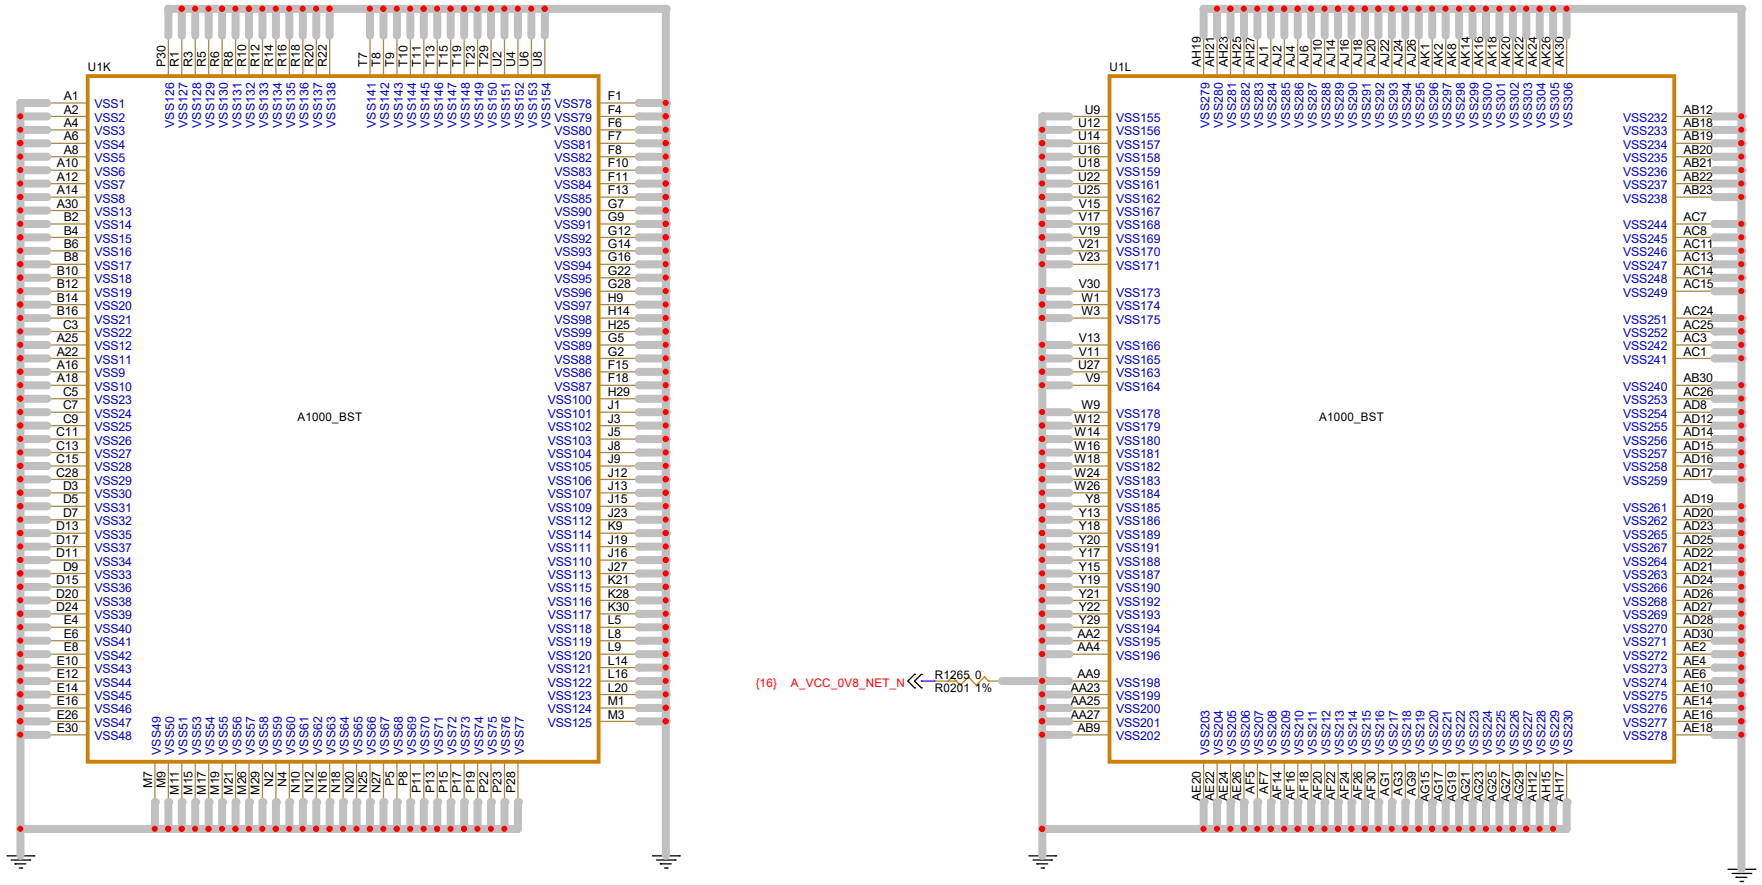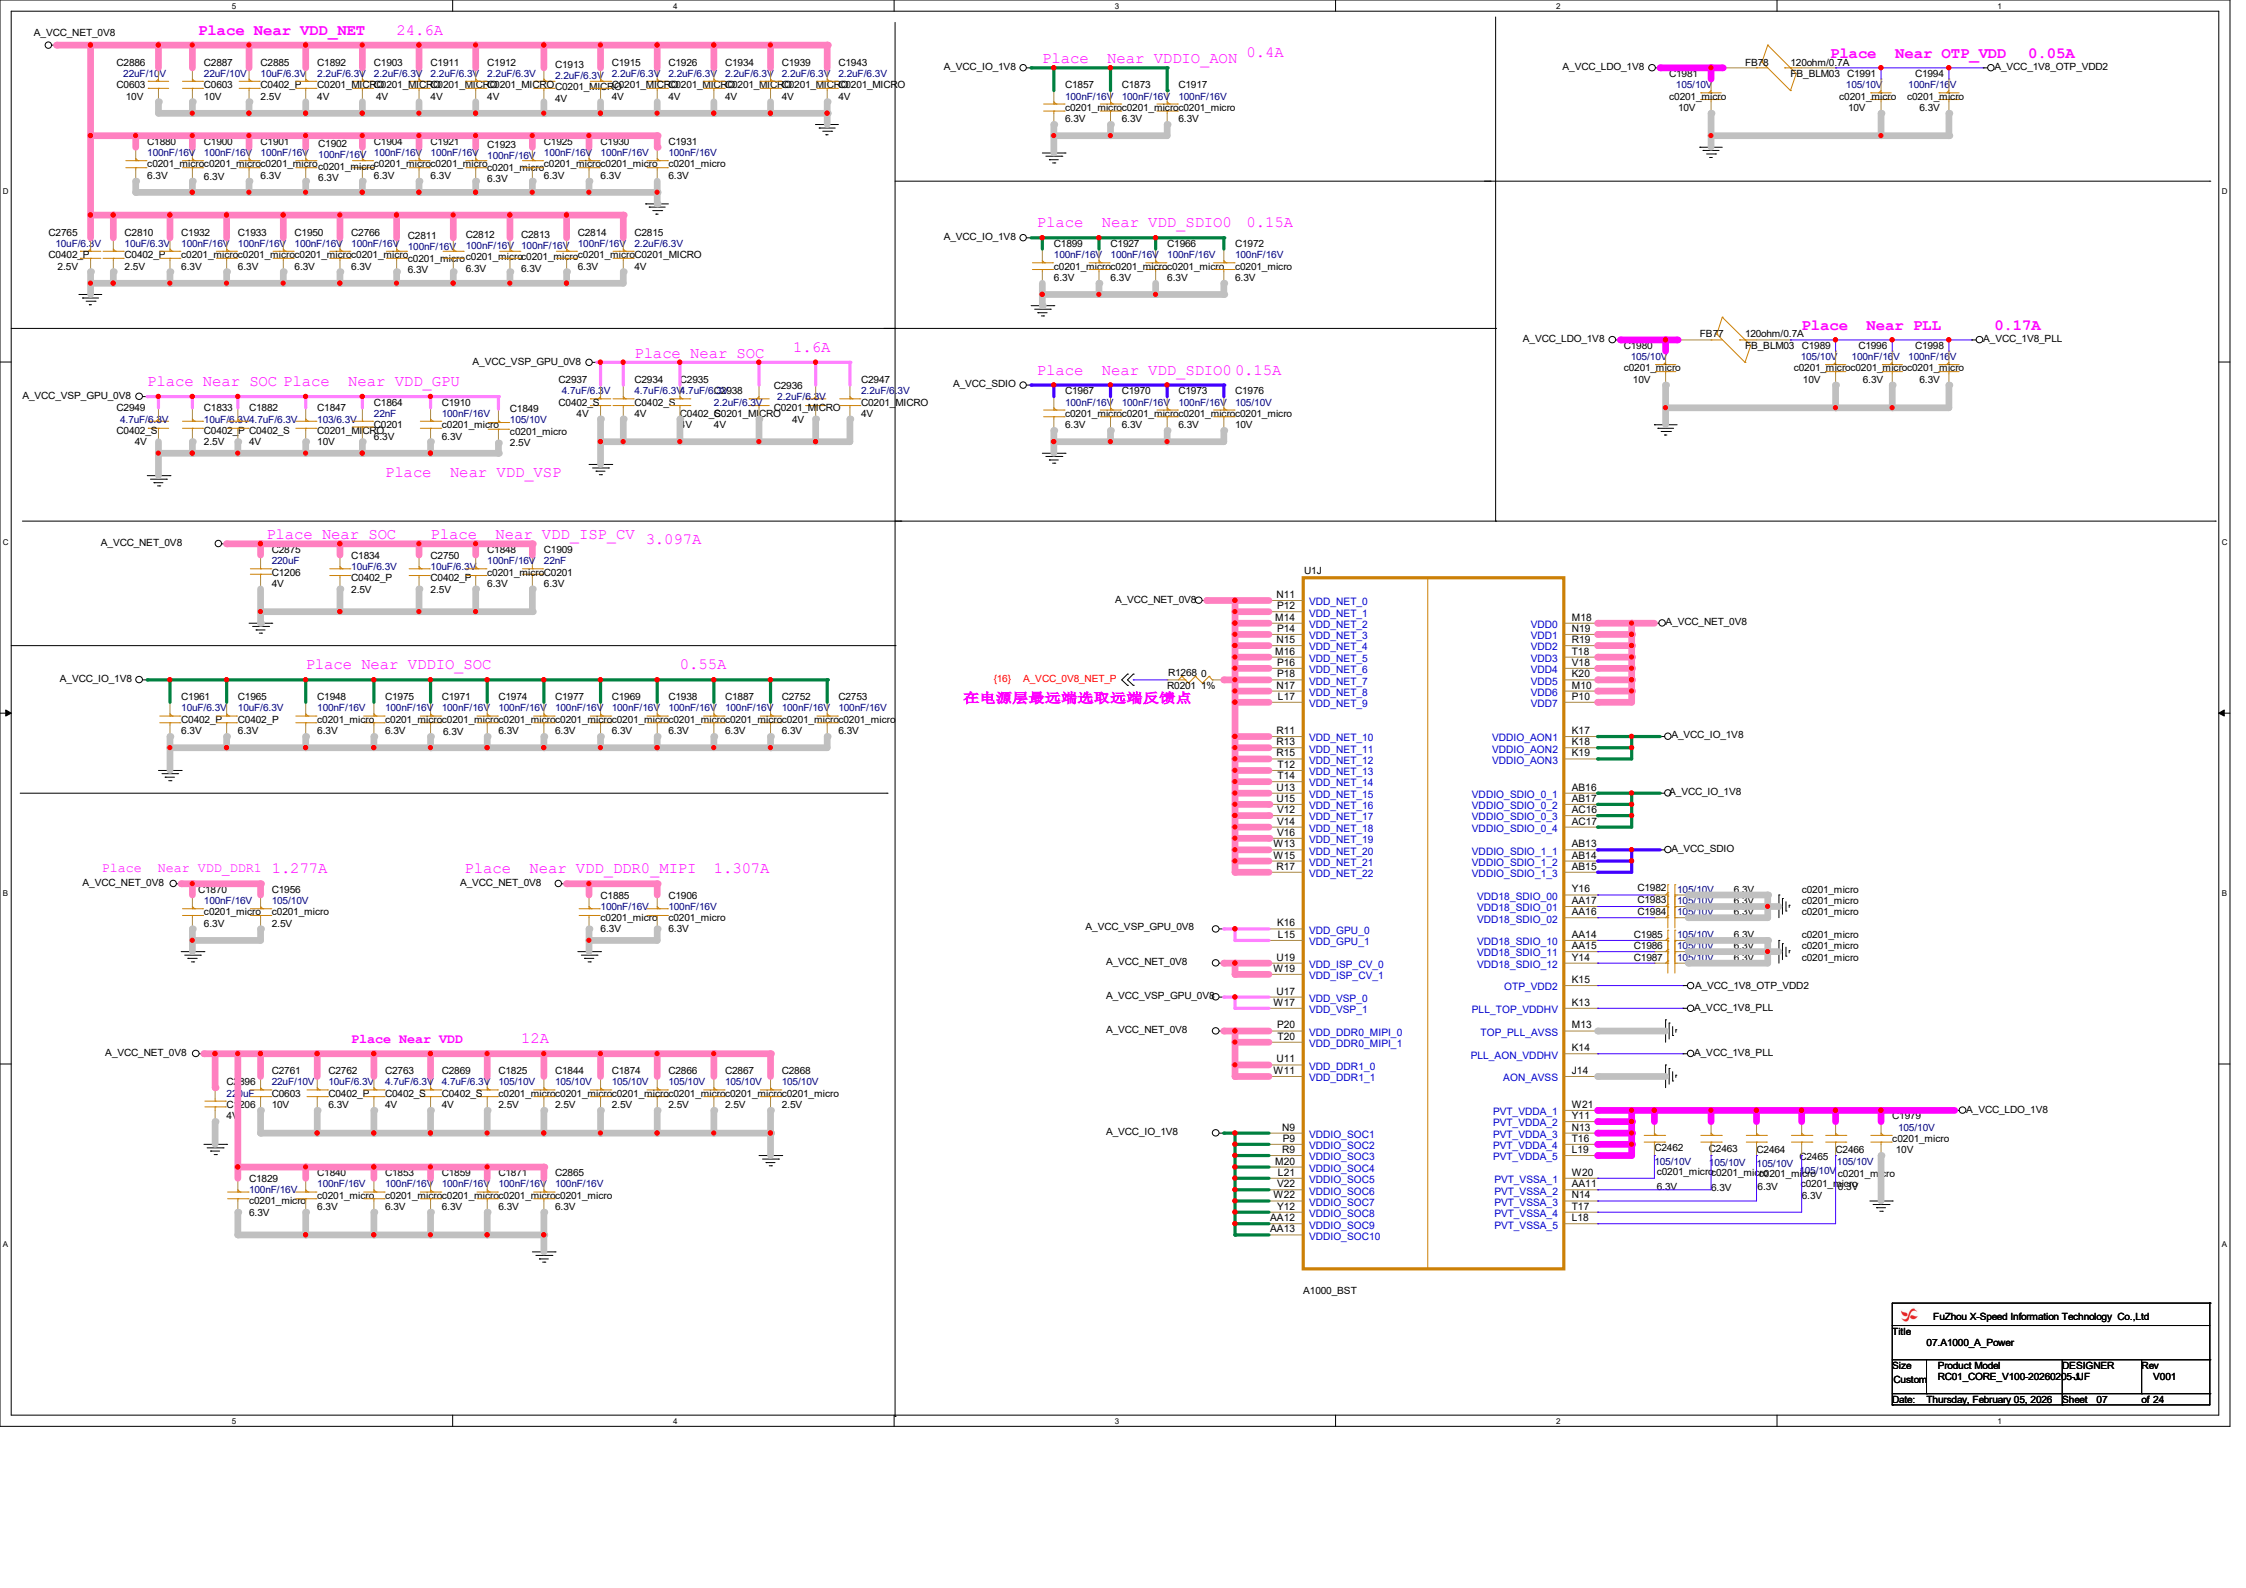

FuZhou X-Speed Information Technology Co.,Ltd			
Title: 06.A1000_A_Gnd			
Size: A3	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 06	of 24	


Place Near VDD_NET 24.6A
A_VCC_NET_0V8
C2886 22uF/10V C0603 10V
C2887 22uF/10V C0603 10V
C2885 10uF/6.3V C0402_P 2.5V
C1892 2.2uF/6.3V c0201_MICRO 4V
C1903 2.2uF/6.3V c0201_MICRO 4V
C1911 2.2uF/6.3V c0201_MICRO 4V
C1912 2.2uF/6.3V c0201_MICRO 4V
C1913 2.2uF/6.3V c0201_MICRO 4V
C1915 2.2uF/6.3V c0201_MICRO 4V
C1926 2.2uF/6.3V c0201_MICRO 4V
C1934 2.2uF/6.3V c0201_MICRO 4V
C1939 2.2uF/6.3V c0201_MICRO 4V
C1943 2.2uF/6.3V c0201_MICRO 4V
C1880 100nF/16V c0201_micro 6.3V
C1900 100nF/16V c0201_micro 6.3V
C1901 100nF/16V c0201_micro 6.3V
C1902 100nF/16V c0201_micro 6.3V
C1904 100nF/16V c0201_micro 6.3V
C1921 100nF/16V c0201_micro 6.3V
C1923 100nF/16V c0201_micro 6.3V
C1925 100nF/16V c0201_micro 6.3V
C1930 100nF/16V c0201_micro 6.3V
C1931 100nF/16V c0201_micro 6.3V
C2765 10uF/6.3V C0402_P 2.5V
C2810 10uF/6.3V C0402_P 2.5V
C1932 100nF/16V c0201_micro 6.3V
C1933 100nF/16V c0201_micro 6.3V
C1950 100nF/16V c0201_micro 6.3V
C2766 100nF/16V c0201_micro 6.3V
C2811 100nF/16V c0201_micro 6.3V
C2812 100nF/16V c0201_micro 6.3V
C2813 100nF/16V c0201_micro 6.3V
C2814 100nF/16V c0201_micro 6.3V
C2815 2.2uF/6.3V c0201_MICRO 4V
Place Near VDDIO_AON 0.4A
A_VCC_IO_1V8
C1857 100nF/16V c0201_micro 6.3V
C1873 100nF/16V c0201_micro 6.3V
C1917 100nF/16V c0201_micro 6.3V
Place Near OTP_VDD 0.05A
A_VCC_LDO_1V8
FB78 120ohm/0.7A FB_BLM03
C1981 105/10V c0201_micro 10V
C1991 105/10V c0201_micro 10V
C1994 100nF/16V c0201_micro 6.3V
A_VCC_1V8_OTP_VDD2
Place Near VDD_SDIO0 0.15A
A_VCC_IO_1V8
C1899 100nF/16V c0201_micro 6.3V
C1927 100nF/16V c0201_micro 6.3V
C1966 100nF/16V c0201_micro 6.3V
C1972 100nF/16V c0201_micro 6.3V
Place Near SOC 1.6A
A_VCC_VSP_GPU_0V8
C2937 4.7uF/6.3V C0402_S 4V
C2934 4.7uF/6.3V C0402_S 4V
C2935 4.7uF/6.3V C0402_S 4V
C2938 2.2uF/6.3V c0201_MICRO 4V
C2936 2.2uF/6.3V c0201_MICRO 4V
C2947 2.2uF/6.3V c0201_MICRO 4V
Place Near SOC Place Near VDD_GPU
A_VCC_VSP_GPU_0V8
C2949 4.7uF/6.3V C0402_S 4V
C1833 10uF/6.3V C0402_P 2.5V
C1882 4.7uF/6.3V C0402_S 4V
C1847 103/6.3V c0201_MICRO 10V
C1864 22nF c0201 6.3V
C1910 100nF/16V c0201_micro 6.3V
C1849 105/10V c0201_micro 2.5V
Place Near VDD_VSP
Place Near VDD_SDIO0 0.15A
A_VCC_SDIO
C1967 100nF/16V c0201_micro 6.3V
C1970 100nF/16V c0201_micro 6.3V
C1973 100nF/16V c0201_micro 6.3V
C1976 105/10V c0201_micro 10V
Place Near PLL 0.17A
A_VCC_LDO_1V8
FB77 120ohm/0.7A FB_BLM03
C1980 105/10V c0201_micro 10V
C1989 105/10V c0201_micro 10V
C1996 100nF/16V c0201_micro 6.3V
C1998 100nF/16V c0201_micro 6.3V
A_VCC_1V8_PLL
Place Near SOC Place Near VDD_ISP_CV 3.097A
A_VCC_NET_0V8
C2875 220uF C1206 4V
C1834 10uF/6.3V C0402_P 2.5V
C2750 10uF/6.3V C0402_P 2.5V
C1848 100nF/16V c0201_micro 6.3V
C1909 22nF c0201 6.3V
Place Near VDDIO_SOC 0.55A
A_VCC_IO_1V8
C1961 10uF/6.3V C0402_P 6.3V
C1965 10uF/6.3V C0402_P 6.3V
C1948 100nF/16V c0201_micro 6.3V
C1975 100nF/16V c0201_micro 6.3V
C1971 100nF/16V c0201_micro 6.3V
C1974 100nF/16V c0201_micro 6.3V
C1977 100nF/16V c0201_micro 6.3V
C1969 100nF/16V c0201_micro 6.3V
C1938 100nF/16V c0201_micro 6.3V
C1887 100nF/16V c0201_micro 6.3V
C2752 100nF/16V c0201_micro 6.3V
C2753 100nF/16V c0201_micro 6.3V
Place Near VDD_DDR1 1.277A
A_VCC_NET_0V8
C1870 100nF/16V c0201_micro 6.3V
C1956 105/10V c0201_micro 2.5V
Place Near VDD_DDR0_MIPI 1.307A
A_VCC_NET_0V8
C1885 100nF/16V c0201_micro 6.3V
C1906 100nF/16V c0201_micro 6.3V
Place Near VDD 12A
A_VCC_NET_0V8
C2396 22uF C1206 4V
C2761 22uF/10V C0603 10V
C2762 10uF/6.3V C0402_P 6.3V
C2763 4.7uF/6.3V C0402_S 4V
C2869 4.7uF/6.3V C0402_S 4V
C1825 105/10V c0201_micro 2.5V
C1844 105/10V c0201_micro 2.5V
C1874 105/10V c0201_micro 2.5V
C2866 105/10V c0201_micro 2.5V
C2867 105/10V c0201_micro 2.5V
C2868 105/10V c0201_micro 2.5V
C1829 100nF/16V c0201_micro 6.3V
C1840 100nF/16V c0201_micro 6.3V
C1853 100nF/16V c0201_micro 6.3V
C1859 100nF/16V c0201_micro 6.3V
C1871 100nF/16V c0201_micro 6.3V
C2865 100nF/16V c0201_micro 6.3V
U1J
A_VCC_NET_0V8
{16} A_VCC_0V8_NET_P
R1268 0 R0201 1%
在电源层最远端选取远端反馈点
VDD_NET_0 VDD_NET_1 VDD_NET_2 VDD_NET_3 VDD_NET_4 VDD_NET_5 VDD_NET_6 VDD_NET_7 VDD_NET_8 VDD_NET_9
VDD_NET_10 VDD_NET_11 VDD_NET_12 VDD_NET_13 VDD_NET_14 VDD_NET_15 VDD_NET_16 VDD_NET_17 VDD_NET_18 VDD_NET_19 VDD_NET_20 VDD_NET_21 VDD_NET_22
A_VCC_VSP_GPU_0V8
VDD_GPU_0 VDD_GPU_1
A_VCC_NET_0V8
VDD_ISP_CV_0 VDD_ISP_CV_1
A_VCC_VSP_GPU_0V8
VDD_VSP_0 VDD_VSP_1
A_VCC_NET_0V8
VDD_DDR0_MIPI_0 VDD_DDR0_MIPI_1
VDD_DDR1_0 VDD_DDR1_1
A_VCC_IO_1V8
VDDIO_SOC1 VDDIO_SOC2 VDDIO_SOC3 VDDIO_SOC4 VDDIO_SOC5 VDDIO_SOC6 VDDIO_SOC7 VDDIO_SOC8 VDDIO_SOC9 VDDIO_SOC10
VDD0 VDD1 VDD2 VDD3 VDD4 VDD5 VDD6 VDD7
A_VCC_NET_0V8
VDDIO_AON1 VDDIO_AON2 VDDIO_AON3
A_VCC_IO_1V8
VDDIO_SDIO_0_1 VDDIO_SDIO_0_2 VDDIO_SDIO_0_3 VDDIO_SDIO_0_4
A_VCC_IO_1V8
VDDIO_SDIO_1_1 VDDIO_SDIO_1_2 VDDIO_SDIO_1_3
A_VCC_SDIO
VDD18_SDIO_00 VDD18_SDIO_01 VDD18_SDIO_02
VDD18_SDIO_10 VDD18_SDIO_11 VDD18_SDIO_12
OTP_VDD2
A_VCC_1V8_OTP_VDD2
PLL_TOP_VDDHV
A_VCC_1V8_PLL
TOP_PLL_AVSS
PLL_AON_VDDHV
A_VCC_1V8_PLL
AON_AVSS
PVT_VDDA_1 PVT_VDDA_2 PVT_VDDA_3 PVT_VDDA_4 PVT_VDDA_5
A_VCC_LDO_1V8
PVT_VSSA_1 PVT_VSSA_2 PVT_VSSA_3 PVT_VSSA_4 PVT_VSSA_5
A1000_BST
FuZhou X-Speed Information Technology Co.,Ltd
Title
07.A1000_A_Power
Size Custom
Product Model RC01_CORE_V100-20260205-IJF
DESIGNER
Rev V001
Date: Thursday, February 05, 2026
Sheet 07 of 24

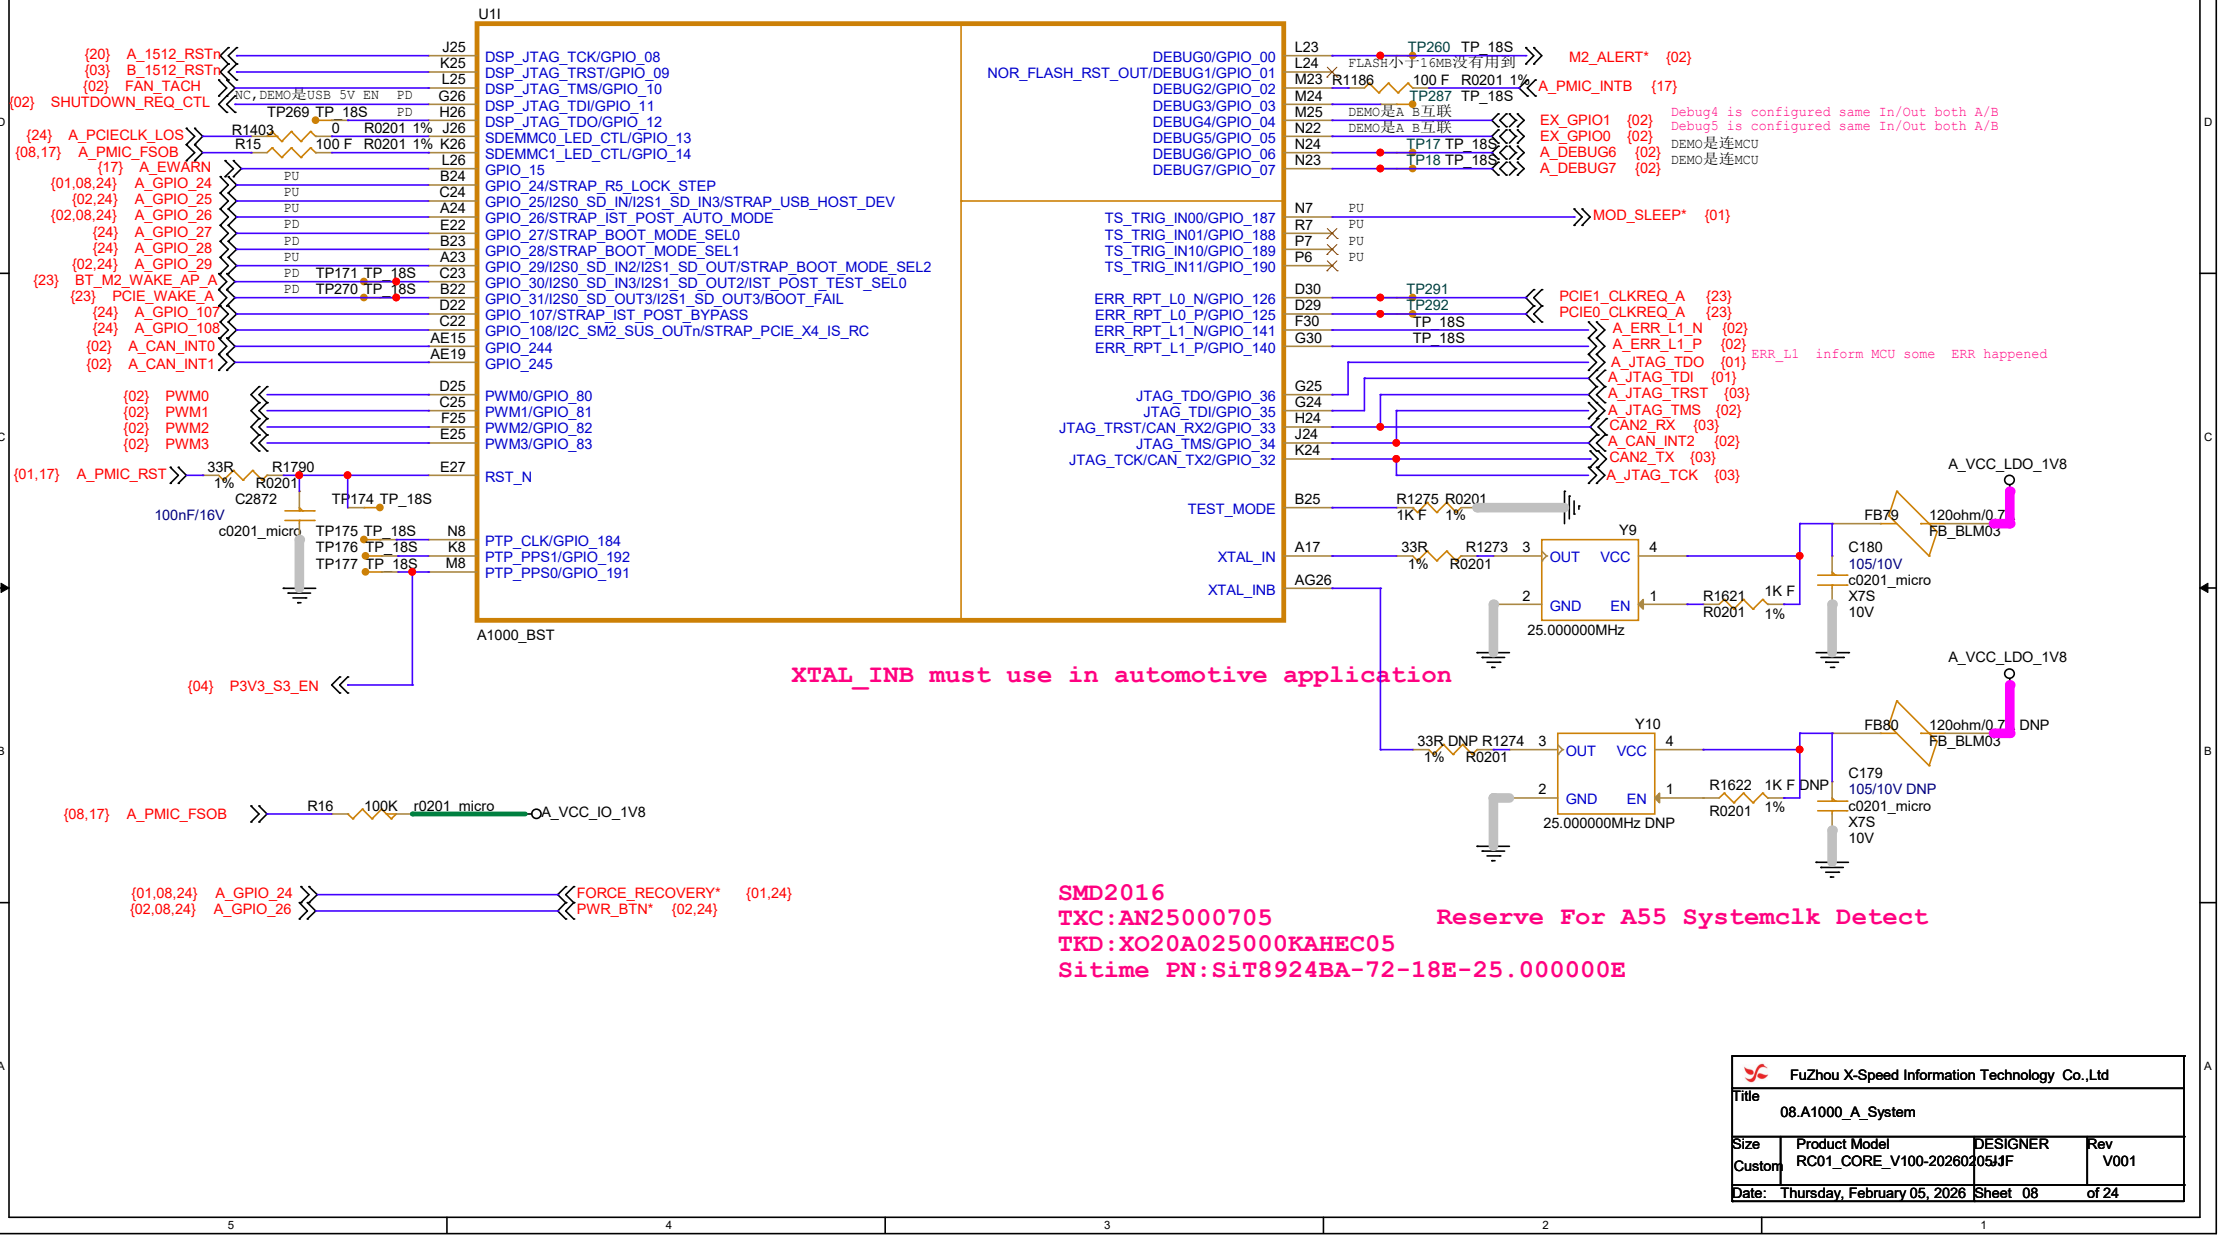
U1I
A1000_BST
DSP_JTAG_TCK/GPIO_08
DSP_JTAG_TRST/GPIO_09
DSP_JTAG_TMS/GPIO_10
DSP_JTAG_TDI/GPIO_11
DSP_JTAG_TDO/GPIO_12
SDEMMC0_LED_CTL/GPIO_13
SDEMMC1_LED_CTL/GPIO_14
GPIO_15
GPIO_24/STRAP_R5_LOCK_STEP
GPIO_25/I2S0_SD_IN/I2S1_SD_IN3/STRAP_USB_HOST_DEV
GPIO_26/STRAP_IST_POST_AUTO_MODE
GPIO_27/STRAP_BOOT_MODE_SEL0
GPIO_28/STRAP_BOOT_MODE_SEL1
GPIO_29/I2S0_SD_IN2/I2S1_SD_OUT/STRAP_BOOT_MODE_SEL2
GPIO_30/I2S0_SD_IN3/I2S1_SD_OUT2/IST_POST_TEST_SEL0
GPIO_31/I2S0_SD_OUT3/I2S1_SD_OUT3/BOOT_FAIL
GPIO_107/STRAP_IST_POST_BYPASS
GPIO_108/I2C_SM2_SUS_OUTn/STRAP_PCIE_X4_IS_RC
GPIO_244
GPIO_245
PWM0/GPIO_80
PWM1/GPIO_81
PWM2/GPIO_82
PWM3/GPIO_83
RST_N
PTP_CLK/GPIO_184
PTP_PPS1/GPIO_192
PTP_PPS0/GPIO_191
DEBUG0/GPIO_00
NOR_FLASH_RST_OUT/DEBUG1/GPIO_01
DEBUG2/GPIO_02
DEBUG3/GPIO_03
DEBUG4/GPIO_04
DEBUG5/GPIO_05
DEBUG6/GPIO_06
DEBUG7/GPIO_07
TS_TRIG_IN00/GPIO_187
TS_TRIG_IN01/GPIO_188
TS_TRIG_IN10/GPIO_189
TS_TRIG_IN11/GPIO_190
ERR_RPT_L0_N/GPIO_126
ERR_RPT_L0_P/GPIO_125
ERR_RPT_L1_N/GPIO_141
ERR_RPT_L1_P/GPIO_140
JTAG_TDO/GPIO_36
JTAG_TDI/GPIO_35
JTAG_TRST/CAN_RX2/GPIO_33
JTAG_TMS/GPIO_34
JTAG_TCK/CAN_TX2/GPIO_32
TEST_MODE
XTAL_IN
XTAL_INB
{20} A_1512_RSTn
{03} B_1512_RSTn
{02} FAN_TACH
{02} SHUTDOWN_REQ_CTL
{24} A_PCIECLK_LOS
{08,17} A_PMIC_FSOB
{17} A_EWARN
{01,08,24} A_GPIO_24
{02,24} A_GPIO_25
{02,08,24} A_GPIO_26
{24} A_GPIO_27
{24} A_GPIO_28
{02,24} A_GPIO_29
{23} BT_M2_WAKE_AP_A
{23} PCIE_WAKE_A
{24} A_GPIO_107
{24} A_GPIO_108
{02} A_CAN_INT0
{02} A_CAN_INT1
{02} PWM0
{02} PWM1
{02} PWM2
{02} PWM3
{01,17} A_PMIC_RST
{04} P3V3_S3_EN
{08,17} A_PMIC_FSOB
{01,08,24} A_GPIO_24
{02,08,24} A_GPIO_26
FORCE_RECOVERY* {01,24}
PWR_BTN* {02,24}
A_VCC_IO_1V8
A_VCC_LDO_1V8
A_PMIC_INTB {17}
EX_GPIO1 {02}
EX_GPIO0 {02}
A_DEBUG6 {02}
A_DEBUG7 {02}
MOD_SLEEP* {01}
PCIE1_CLKREQ_A {23}
PCIE0_CLKREQ_A {23}
A_ERR_L1_N {02}
A_ERR_L1_P {02}
A_JTAG_TDO {01}
A_JTAG_TDI {01}
A_JTAG_TRST {03}
A_JTAG_TMS {02}
CAN2_RX {03}
A_CAN_INT2 {02}
CAN2_TX {03}
A_JTAG_TCK {03}
M2_ALERT* {02}
Debug4 is configured same In/Out both A/B
Debug5 is configured same In/Out both A/B
ERR_L1 inform MCU some ERR happened
XTAL_INB must use in automotive application
SMD2016
TXC:AN25000705
TKD:XO20A025000KAHEC05
Sitime PN:SiT8924BA-72-18E-25.000000E
Reserve For A55 Systemclk Detect
25.000000MHz
25.000000MHz DNP
FuZhou X-Speed Information Technology Co.,Ltd
Title
08.A1000_A_System
Size
Custom
Product Model
RC01_CORE_V100-20260205
DESIGNER
JF
Rev
V001
Date: Thursday, February 05, 2026
Sheet 08
of 24

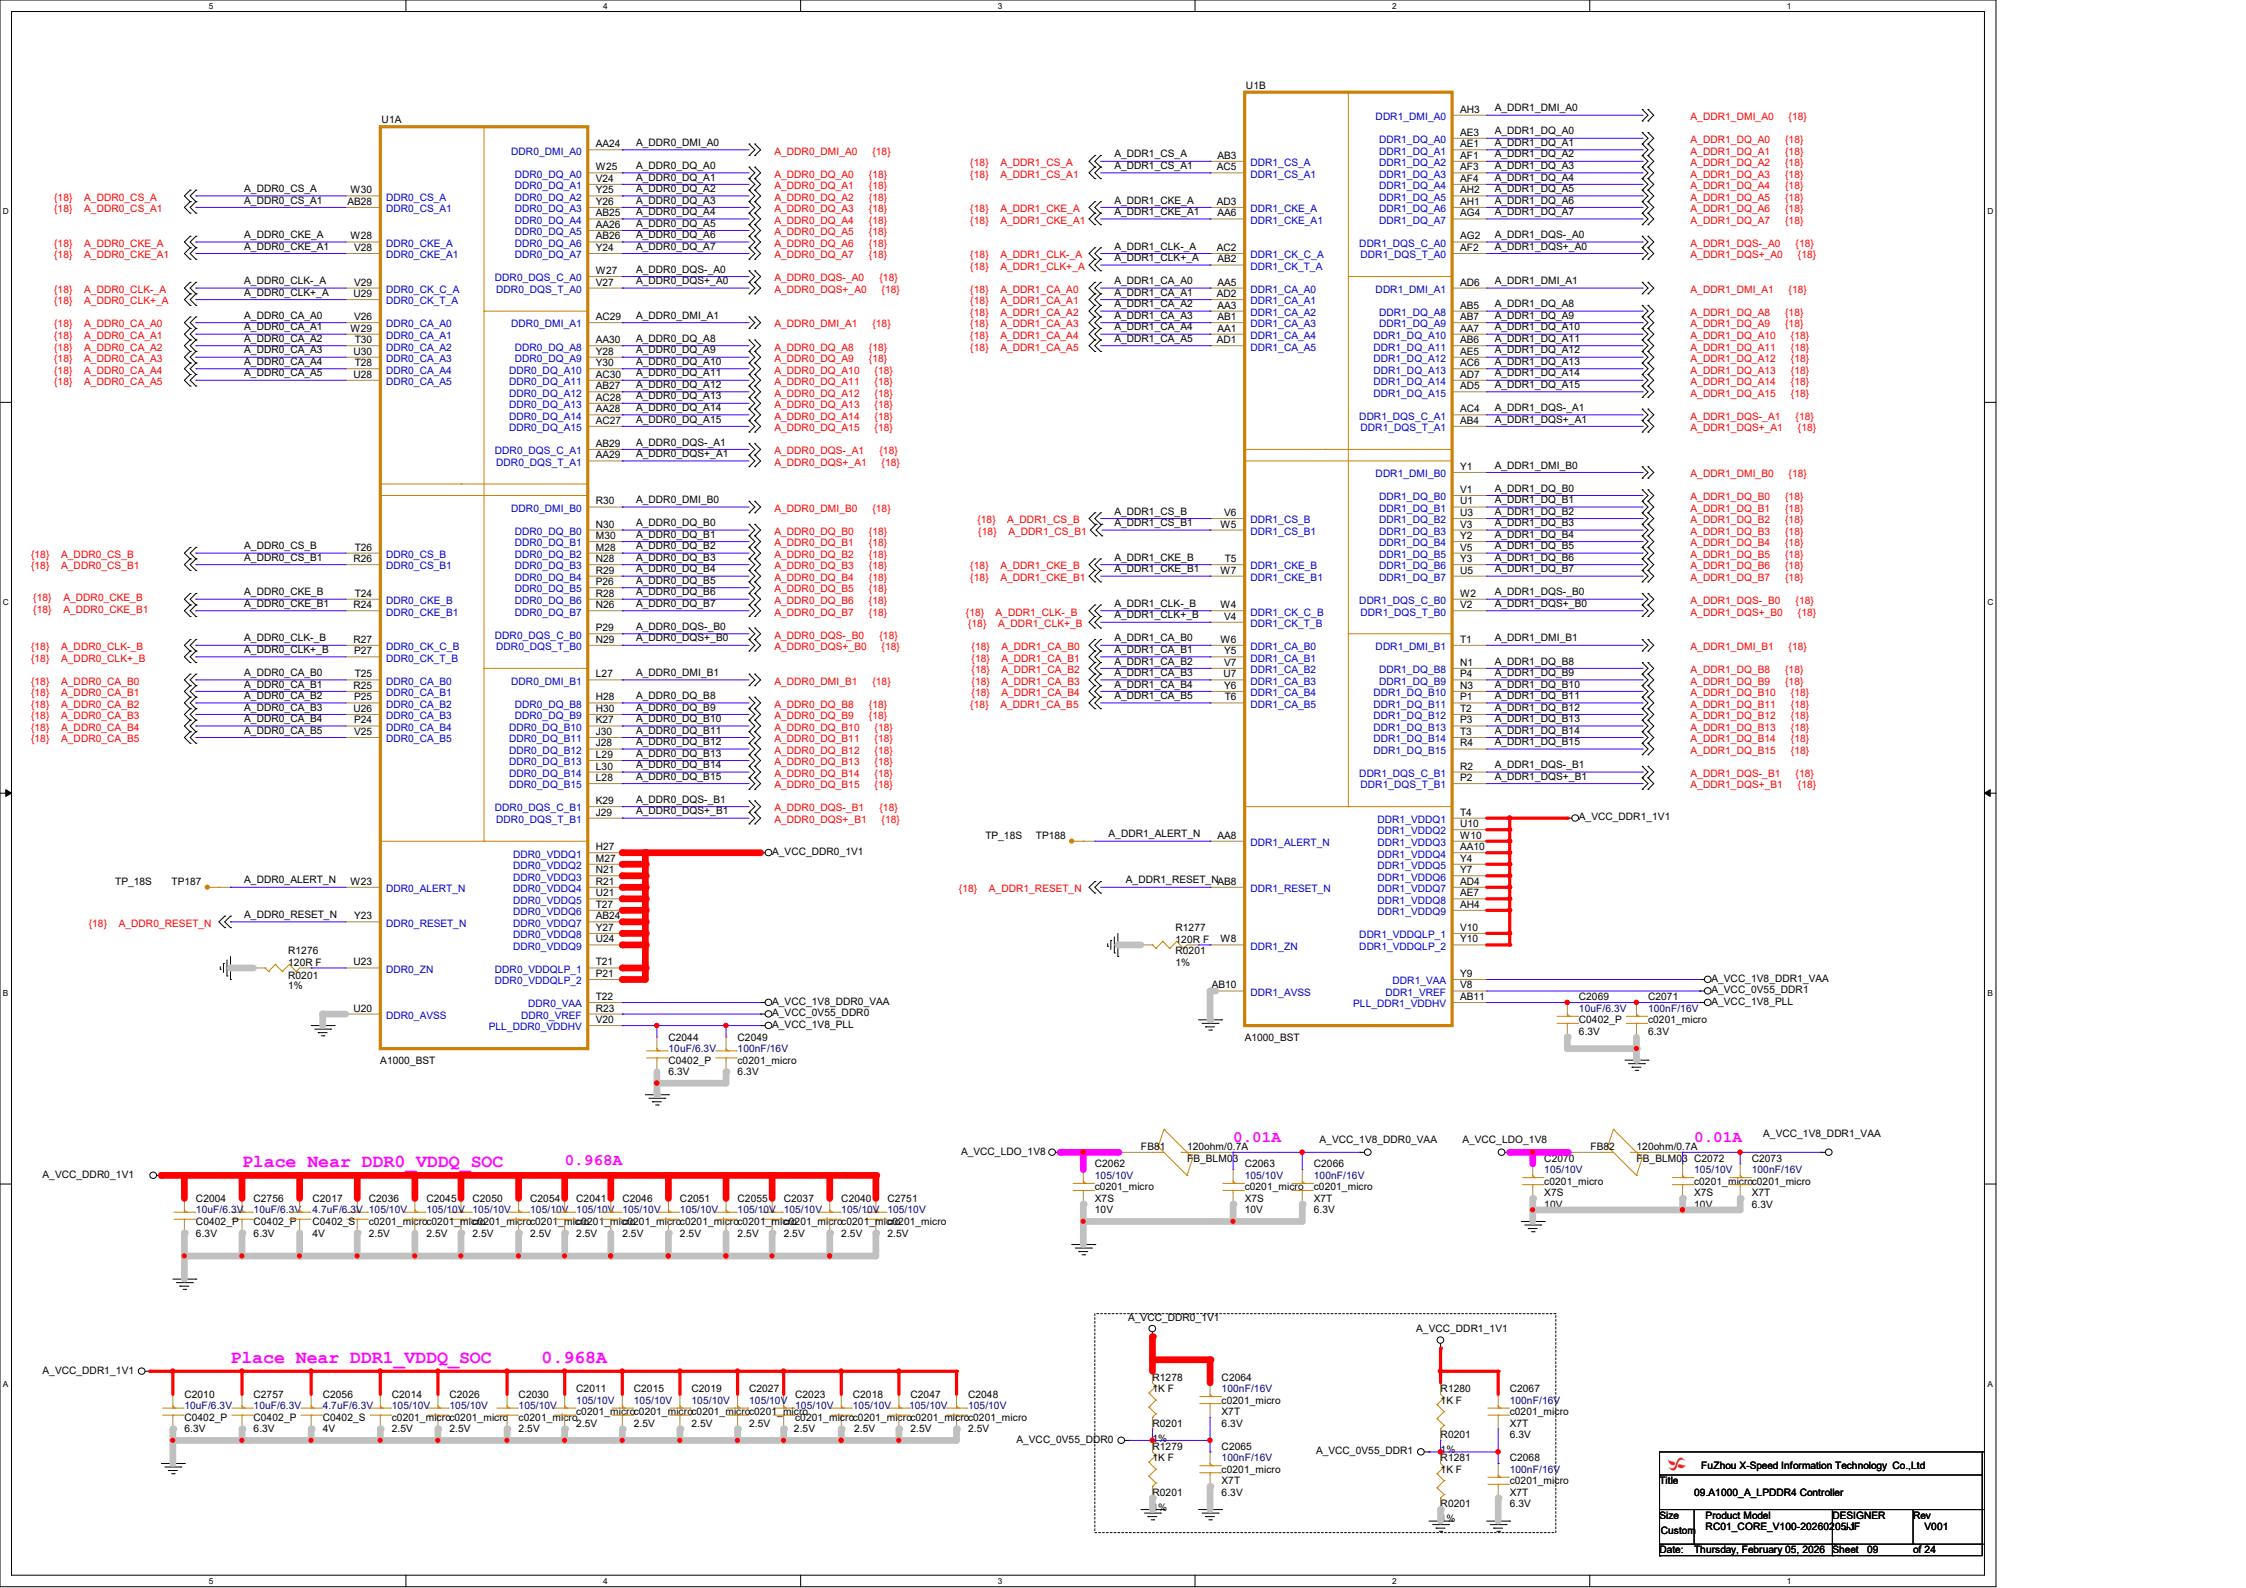
U1A
A1000_BST
U1B
A1000_BST
Place Near DDR0_VDDQ_SOC 0.968A
Place Near DDR1_VDDQ_SOC 0.968A
FuZhou X-Speed Information Technology Co.,Ltd
09.A1000_A_LPDDR4 Controller
Product Model RC01_CORE_V100-20260205-JF
DESIGNER
Rev V001
Thursday, February 05, 2026
Sheet 09 of 24

Place Near PCIE0_VP 0.2A

A_VCC_0V8_PCIE0_VP
C2080 100nF/16V c0201_micro X7T 6.3V
C2084 100nF/16V c0201_micro X7T 6.3V
C2086 100nF/16V c0201_micro X7T 6.3V
C2615 100nF/16V c0201_micro X7T 6.3V

Place Near PCIE0_VPH 0.15A

A_VCC_PCIE_1V8
C2088 105/10V c0201_micro X7S 10V
C2092 100nF/16V c0201_micro X7T 6.3V

A_VCC_0V8_PLL_PCIE
C2099 100nF/16V c0201_micro X7T 6.3V
C2100 100nF/16V c0201_micro X7T 6.3V

Place Near PCIE1_VP 0.2A

A_VCC_0V8_PCIE1_VP
C2448 100nF/16V c0201_micro X7T 6.3V
C2449 100nF/16V c0201_micro X7T 6.3V
C2450 100nF/16V c0201_micro X7T 6.3V
C2616 100nF/16V c0201_micro X7T 6.3V

Place Near PCIE1_VPH 0.15A

A_VCC_PCIE_1V8
C2451 105/10V c0201_micro X7S 10V
C2453 100nF/16V c0201_micro X7T 6.3V

A_VCC_1V8_PLL
C2096 100nF/16V c0201_micro X7T 6.3V

PCIE0/1可以整体互换 100Ω

C2078 0.22uF/6.3V C0201_MICRO
C2082 0.22uF/6.3V C0201_MICRO
C2079 0.22uF/6.3V C0201_MICRO
C2083 0.22uF/6.3V C0201_MICRO

U1E

{03} PCIE0_TX0_N
{03} PCIE0_TX0_P
{03} PCIE0_TX1_N
{03} PCIE0_TX1_P
{03} PCIE0_RX0_N
{03} PCIE0_RX0_P
{03} PCIE0_RX1_N
{03} PCIE0_RX1_P
{24} B_PCIE0_REF_PAD_CLK_P
{24} B_PCIE0_REF_PAD_CLK_N
{03} PCIE1_TX0_N
{03} PCIE1_TX0_P
{03} PCIE1_TX1_N
{03} PCIE1_TX1_P
{03} PCIE1_RX0_N
{03} PCIE1_RX0_P
{03} PCIE1_RX1_N
{03} PCIE1_RX1_P

C688 0.22uF/6.3V C0201_MICRO
C690 0.22uF/6.3V C0201_MICRO
C689 0.22uF/6.3V C0201_MICRO
C691 0.22uF/6.3V C0201_MICRO
R5 100 F R0201 1%
R6 100 F R0201 1%

A3 PCIE0_TX0_M
B3 PCIE0_TX0_P
A5 PCIE0_TX1_M
B5 PCIE0_TX1_P
C4 PCIE0_RX0_M
D4 PCIE0_RX0_P
C6 PCIE0_RX1_M
D6 PCIE0_RX1_P
E5 PCIE0_REF_PAD_CLK_P
F5 PCIE0_REF_PAD_CLK_M
A7 PCIE1_TX0_M
B7 PCIE1_TX0_P
A9 PCIE1_TX1_M
B9 PCIE1_TX1_P
C8 PCIE1_RX0_M
D8 PCIE1_RX0_P
C10 PCIE1_RX1_M
D10 PCIE1_RX1_P
E9 PCIE1_REF_PAD_CLK_P
F9 PCIE1_REF_PAD_CLK_M
G8 PCIE0_RSTB/GPIO_242
H8 PCIE1_RSTB/GPIO_243
E7 PCIE_RESREF

R1283 R0201 200R F 1%

A_VCC_0V8_PCIE0_VP
G10 PCIE0_VP1
H10 PCIE0_VP2
J10 PCIE0_VP3
K10 PCIE0_VP4

A_VCC_0V8_PCIE1_VP
G11 PCIE1_VP1
H11 PCIE1_VP2
J11 PCIE1_VP3
K11 PCIE1_VP4

A_VCC_PCIE_1V8
A_VCC_PCIE_1V8
L10 PCIE0_VPH
L11 PCIE1_VPH

A1000_BST

SDEMMC0 For EMMc ,50Ω

SDEMMC0_DAT0/GPIO_114 AK13 A_SDEMMC0_DAT0 {19}
SDEMMC0_DAT1/GPIO_115 AK12 A_SDEMMC0_DAT1 {19}
SDEMMC0_DAT2/GPIO_116 AJ12 A_SDEMMC0_DAT2 {19}
SDEMMC0_DAT3/GPIO_117 AG13 A_SDEMMC0_DAT3 {19}
SDEMMC0_DAT4/GPIO_118 AK11 A_SDEMMC0_DAT4 {19}
SDEMMC0_DAT5/GPIO_119 AJ11 A_SDEMMC0_DAT5 {19}
SDEMMC0_DAT6/GPIO_120 AG12 A_SDEMMC0_DAT6 {19}
SDEMMC0_DAT7/GPIO_121 AF13 A_SDEMMC0_DAT7 {19}
SDEMMC0_CLK/GPIO_112 AE12 A_SDEMMC0_CLK {19}
SDEMMC0_CMD/GPIO_113 AH13 A_SDEMMC0_CMD {19}

SDEMMC0_WP/GPIO_124 AJ13 A_GPIO_124 TP265 TP_18S
SDEMMC0_CDn/GPIO_123 AF12 A_GPIO_123 TP264 TP_18S
SDEMMC0_RSTB/GPIO_122 AE13 A_SDEMMC0_RSTB {19}

SDEMMC1_DAT0/GPIO_129 AG11
SDEMMC1_DAT1/GPIO_130 AE11
SDEMMC1_DAT2/GPIO_131 AF11
SDEMMC1_DAT3/GPIO_132 AD13
SDEMMC1_DAT4/GPIO_133 AH14
SDEMMC1_DAT5/GPIO_134 AG14
SDEMMC1_DAT6/GPIO_135 AD11
SDEMMC1_DAT7/GPIO_136 AG10
SDEMMC1_CLK/GPIO_127 AH11
SDEMMC1_CMD/GPIO_128 AC12

SDEMMC1_WP/GPIO_139 AC10 R1285 4.7K F R0201 1%
SDEMMC1_CDn/GPIO_138 AD10
SDEMMC1_RSTB/GPIO_137 AF10


PLL_PCIE_VDDHV K12 A_VCC_1V8_PLL
PLL_PCIE_VDD M12 A_VCC_0V8_PLL_PCIE
PLL_TOP_VDD L13
PLL_PCIE_AVSS L12

SDEMMC1 For TFCARD, 50Ω


A_VCC_IO_1V8
1% R0201 10K F R1292 A_SDEMMC0_DAT0
1% R0201 10K F R1293 A_SDEMMC0_DAT1
1% R0201 10K F R1294 A_SDEMMC0_DAT2
1% R0201 10K F R1295 A_SDEMMC0_DAT3
1% R0201 10K F R1296 A_SDEMMC0_DAT4
1% R0201 10K F R1297 A_SDEMMC0_DAT5
1% R0201 10K F R1298 A_SDEMMC0_DAT6
1% R0201 10K F R1299 A_SDEMMC0_DAT7
1% R0201 10K F R1302 A_SDEMMC0_RSTB
1% R0201 10K F R18 A_SDEMMC0_CMD

FuZhou X-Speed Information Technology Co.,Ltd


Title	10.A1000_A_PCIE&SD Controller		
Size Custom	Product Model RC01_CORE_V100-20260205	DESIGNER JF	Rev V001
Date: Thursday, February 05, 2026	Sheet 10	of 24	

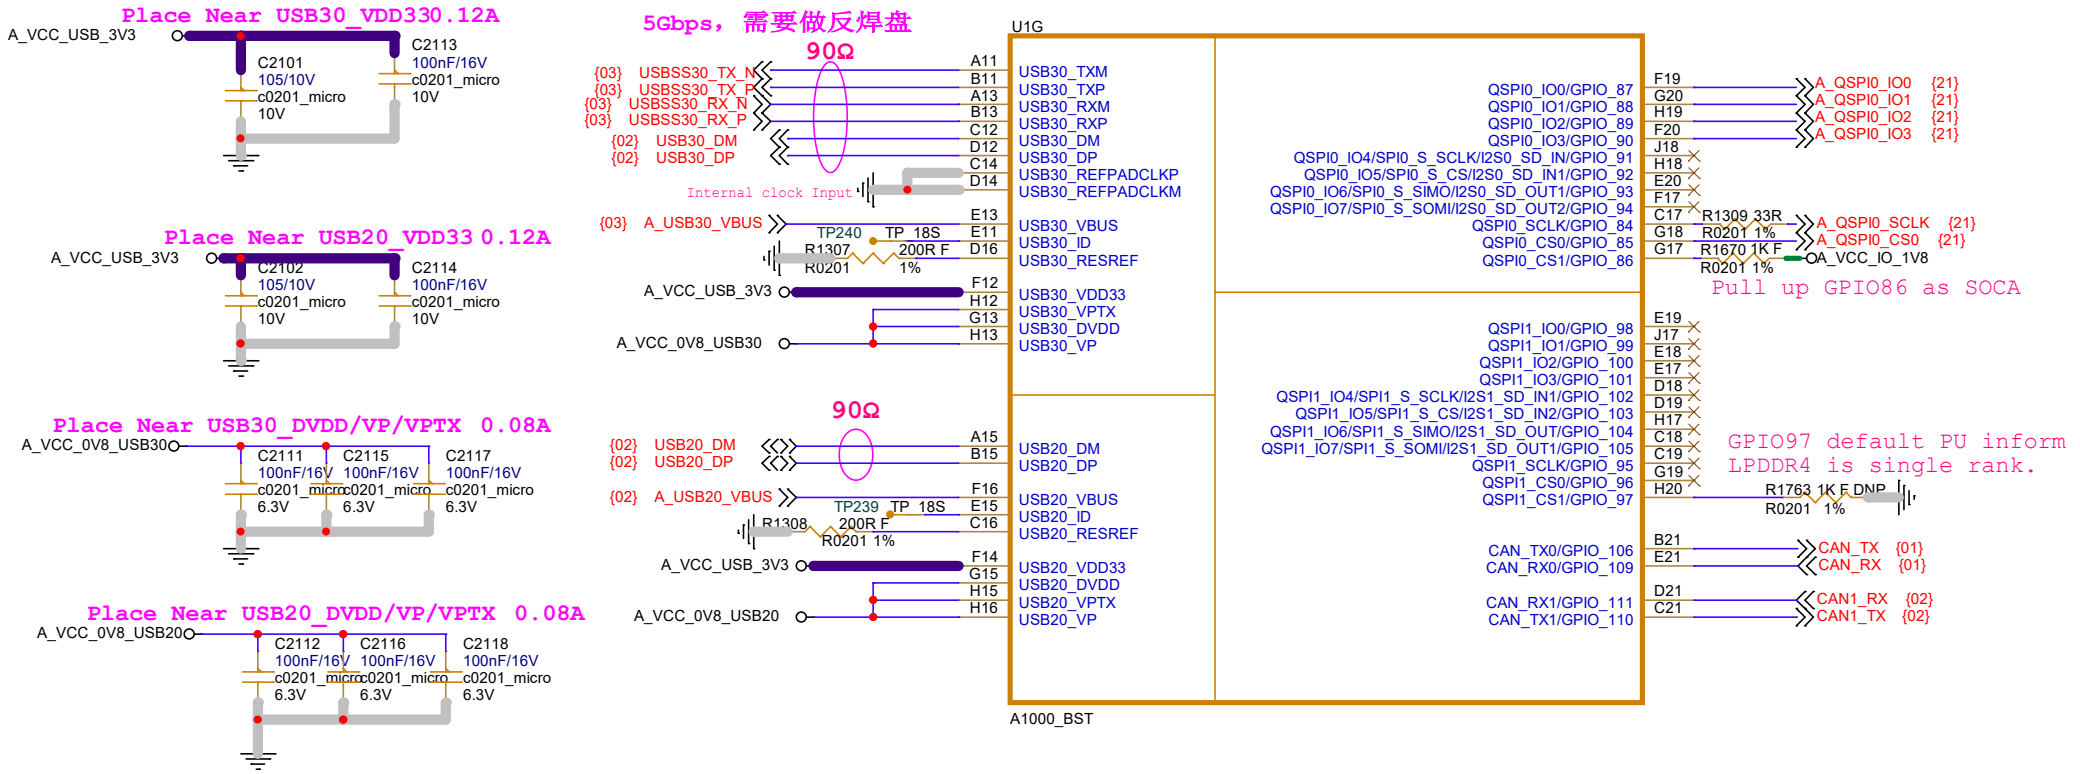


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 11.A1000_A_USBQSPI Controller			
Size: Custom	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 11	of 24	

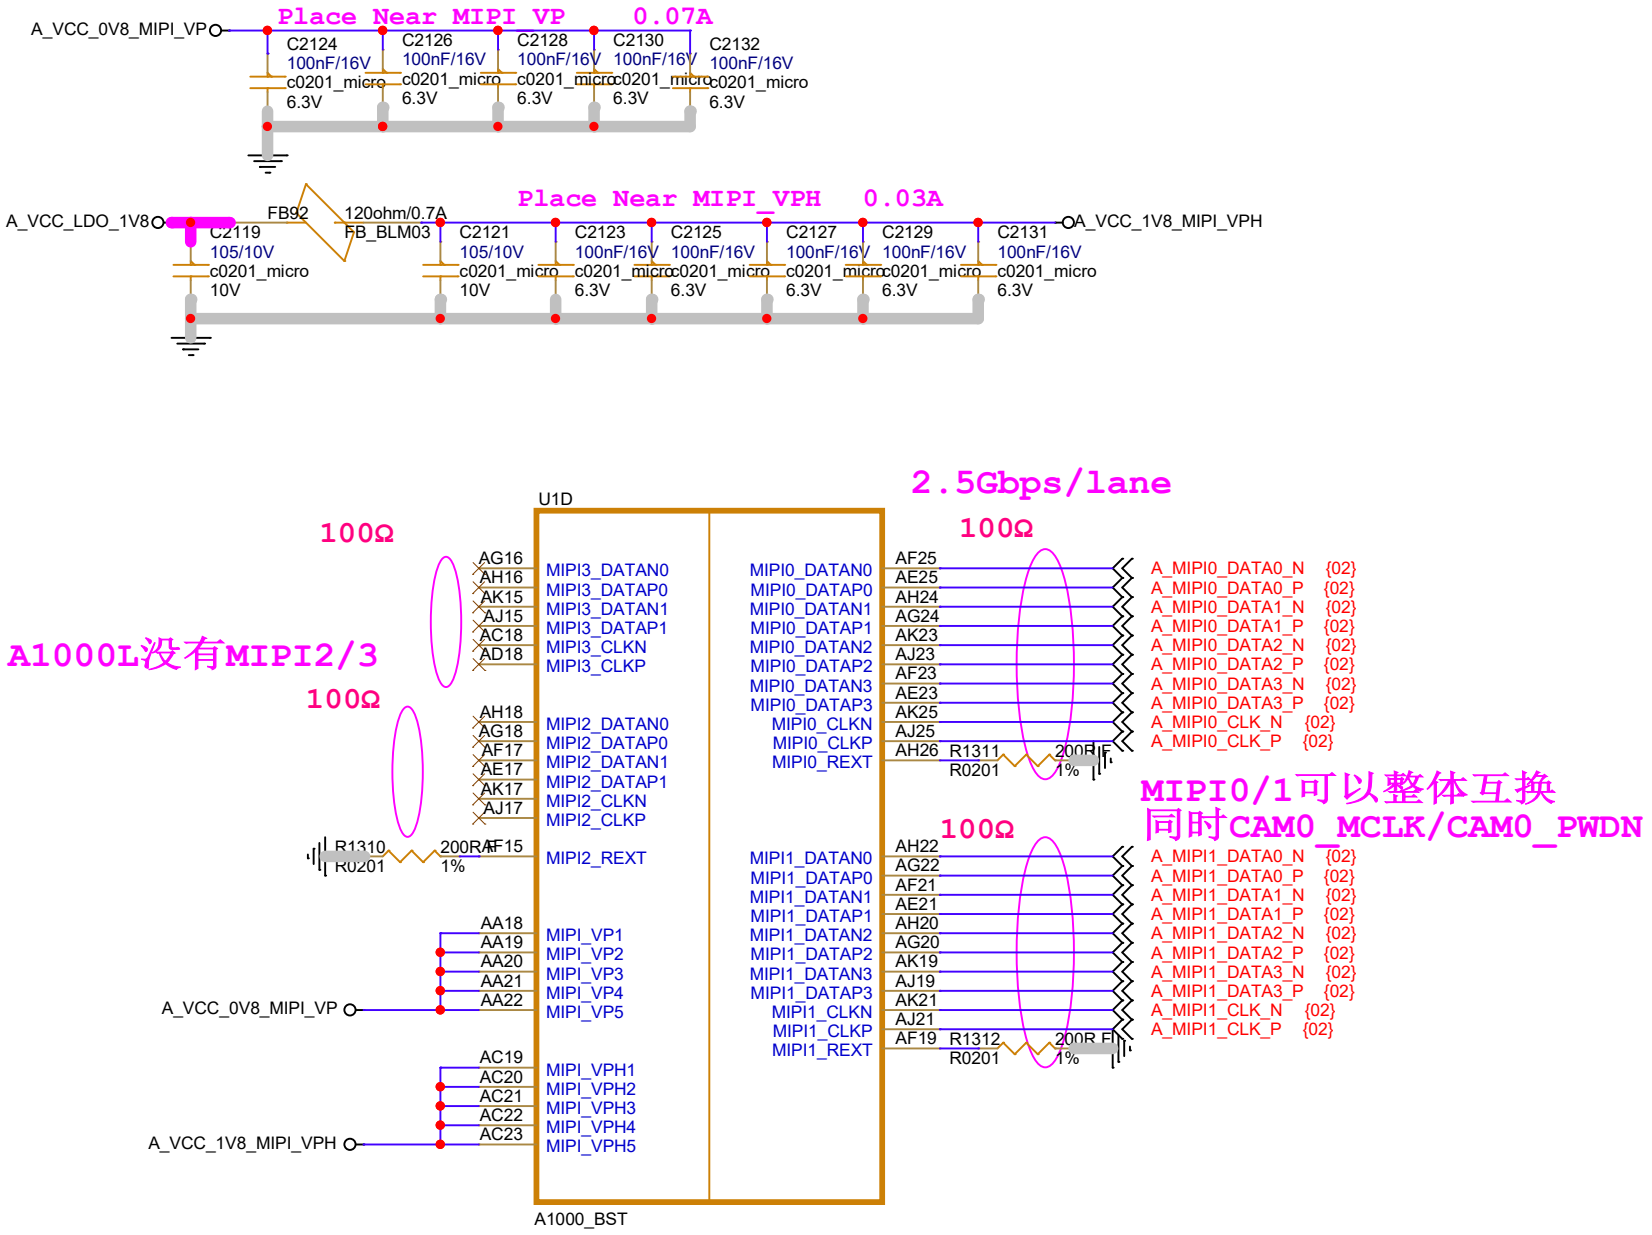


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 12.A1000_A_MIPI Controller			
Size: A4	Product Model: RC01_CORE_V100-20260205	DESIGNER: JJF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 12	of 24	

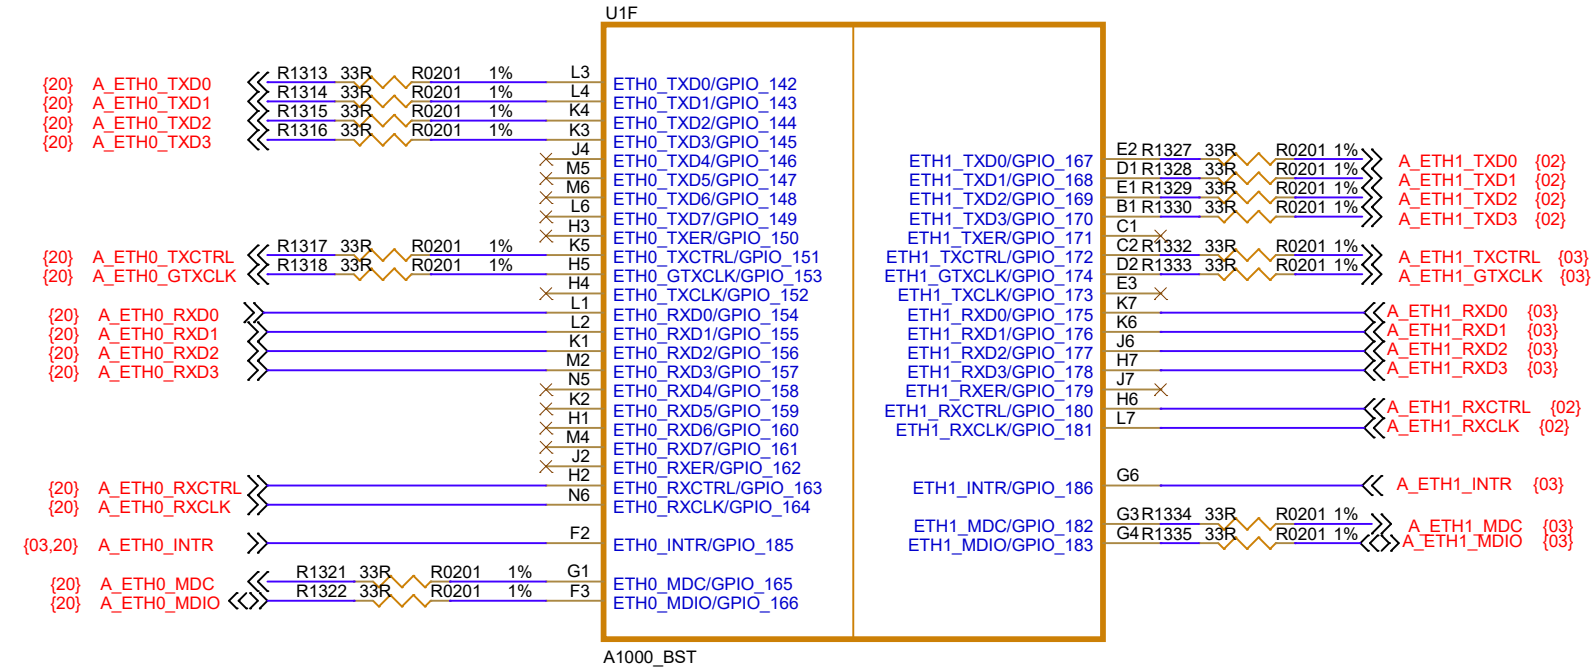


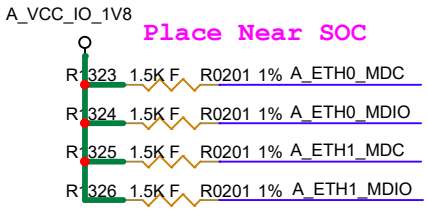


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 13.A1000_A_GMAC Controller			
Size: Custom	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 13	of 24	

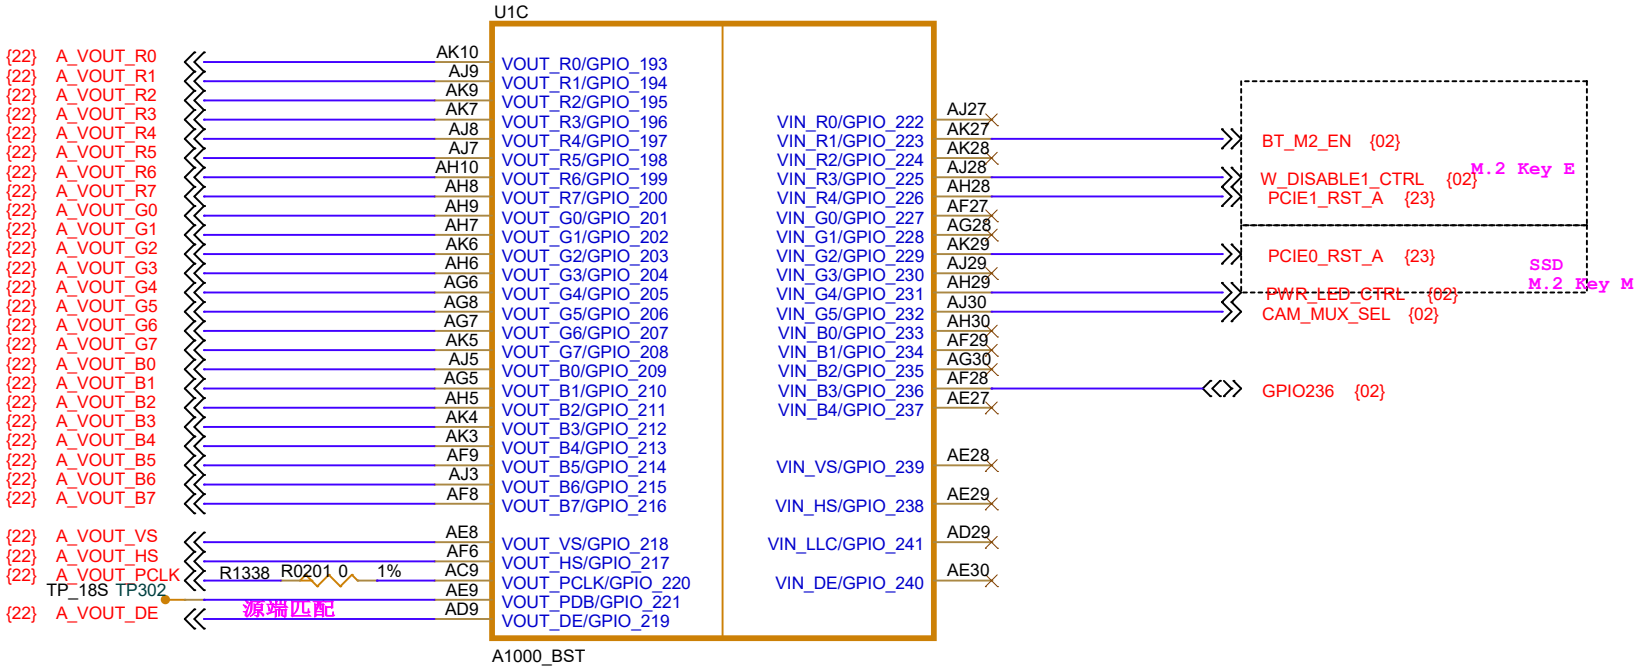


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 14.A1000_A_Vin &Vout			
Size: Custom	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 14	of 24	

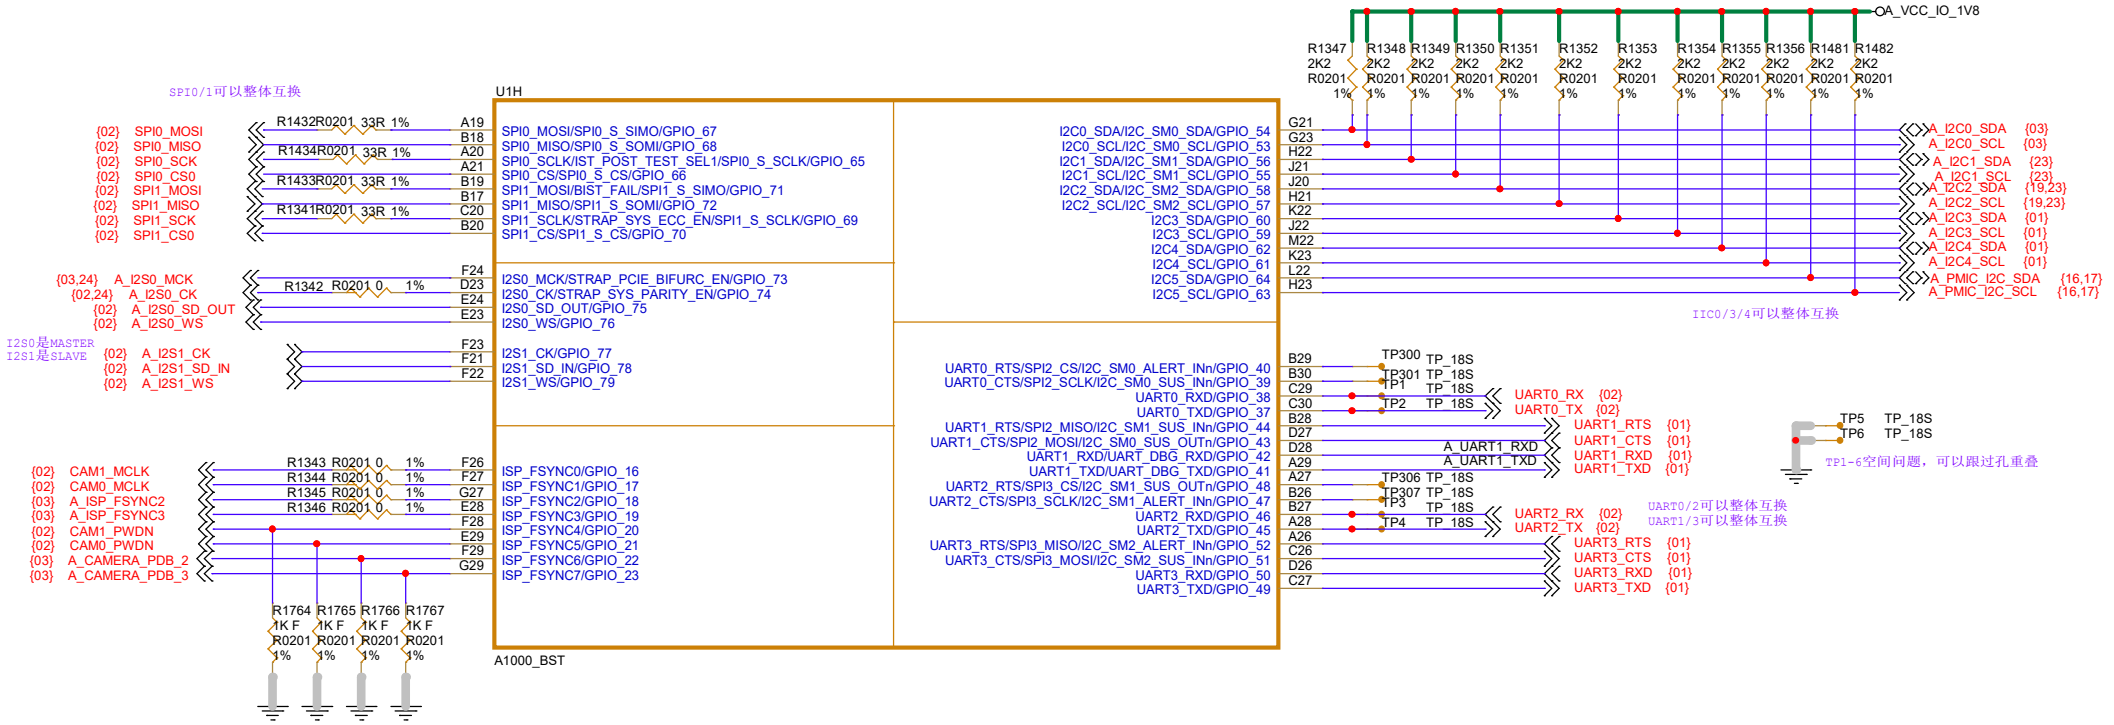


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 15.A1000_A_System &LS_IF			
Size: Custom	Product Model: RC01_CORE_V100-20260205.IF	DESIGNER: LJF	Rev: V001
Date: Thursday, February 05, 2026		Sheet 15	of 24

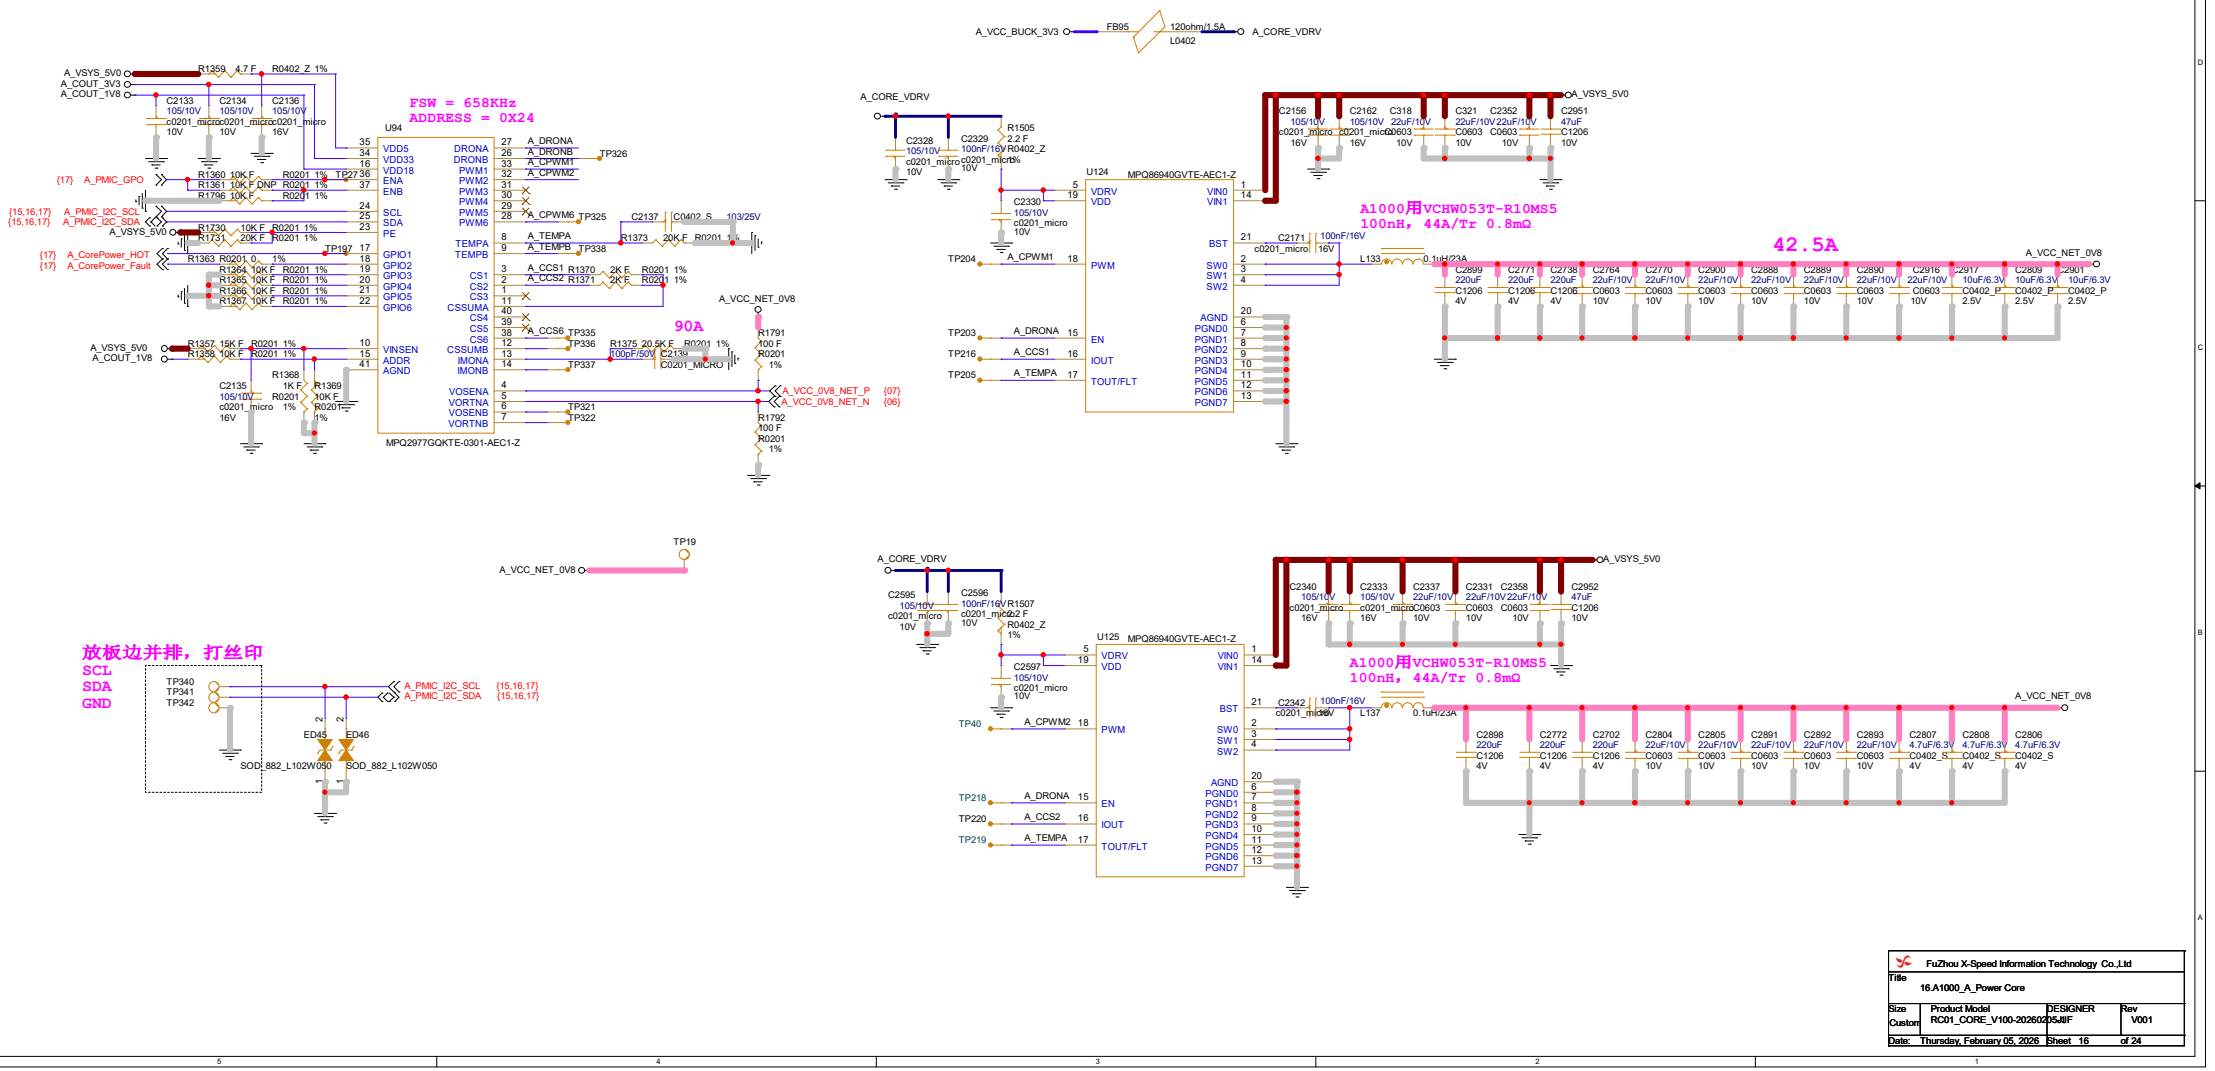

FSW = 658KHz
ADDRESS = 0X24
U94
MPQ2977GQKTE-0301-AEC1-Z
90A
A_VCC_BUCK_3V3
FB95
120ohm/1.5A
L0402
A_CORE_VDRV
U124
MPQ86940GVTE-AEC1-Z
A1000用VCHW053T-R10MS5
100nH，44A/Tr 0.8mΩ
42.5A
A_VSYS_5V0
A_VCC_NET_0V8
放板边并排，打丝印
SCL
SDA
GND
SOD_882_L102W050
U125
MPQ86940GVTE-AEC1-Z
A1000用VCHW053T-R10MS5
100nH，44A/Tr 0.8mΩ
FuZhou X-Speed Information Technology Co.,Ltd
Title
16.A1000_A_Power Core
Size
Custom
Product Model
RC01_CORE_V100-20260205
DESIGNER
JiF
Rev
V001
Date: Thursday, February 05, 2026
Sheet 16 of 24

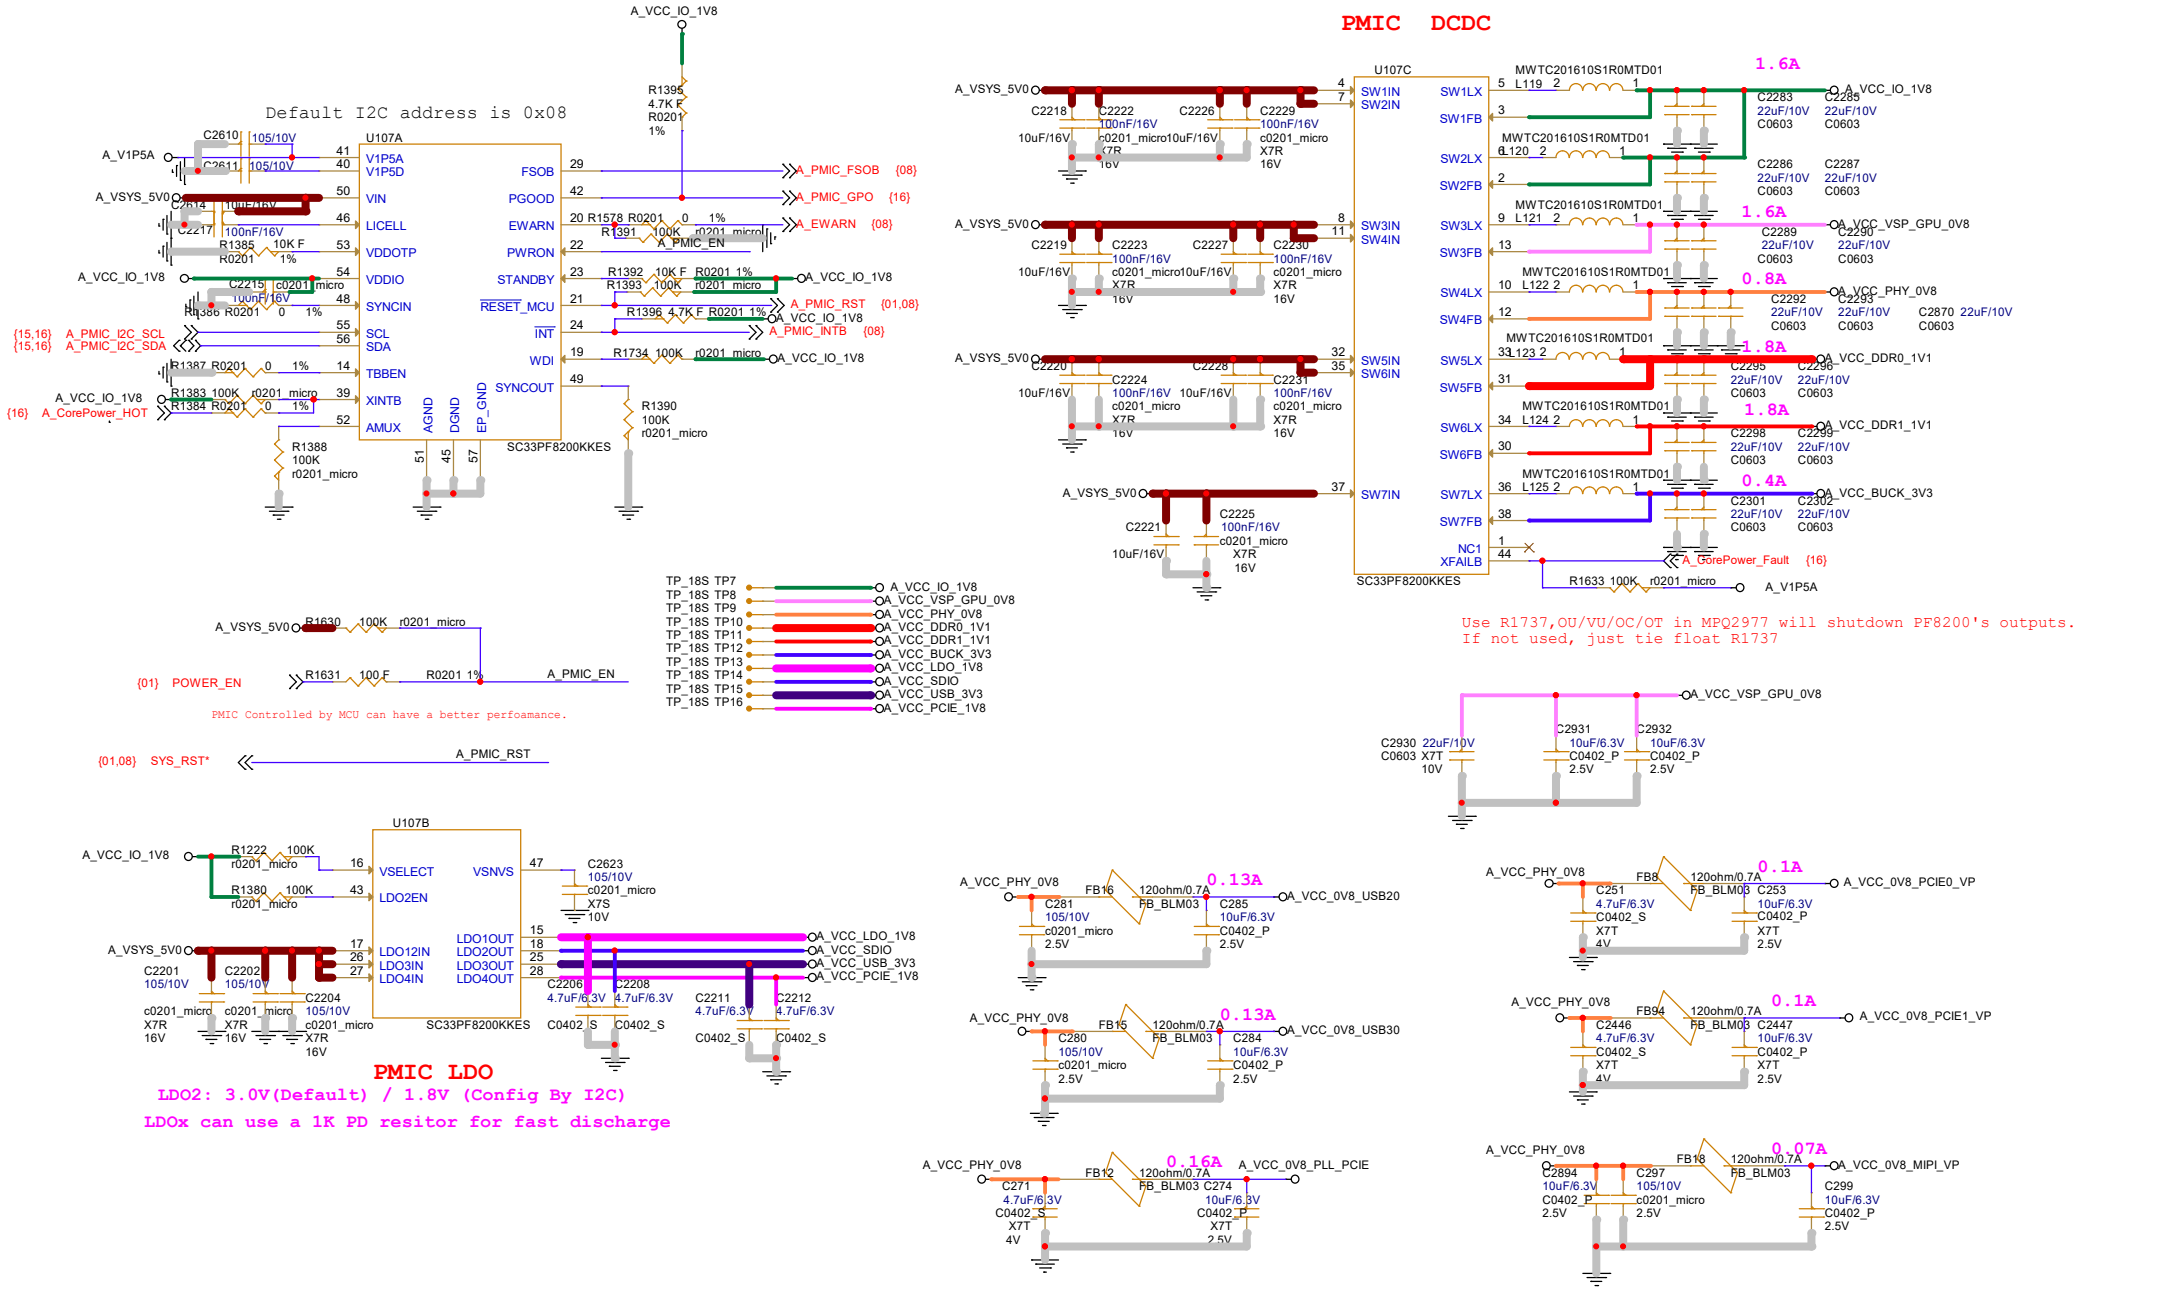


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 17.A1000_A_Power PMU			
Size: A3	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 17	of 24	

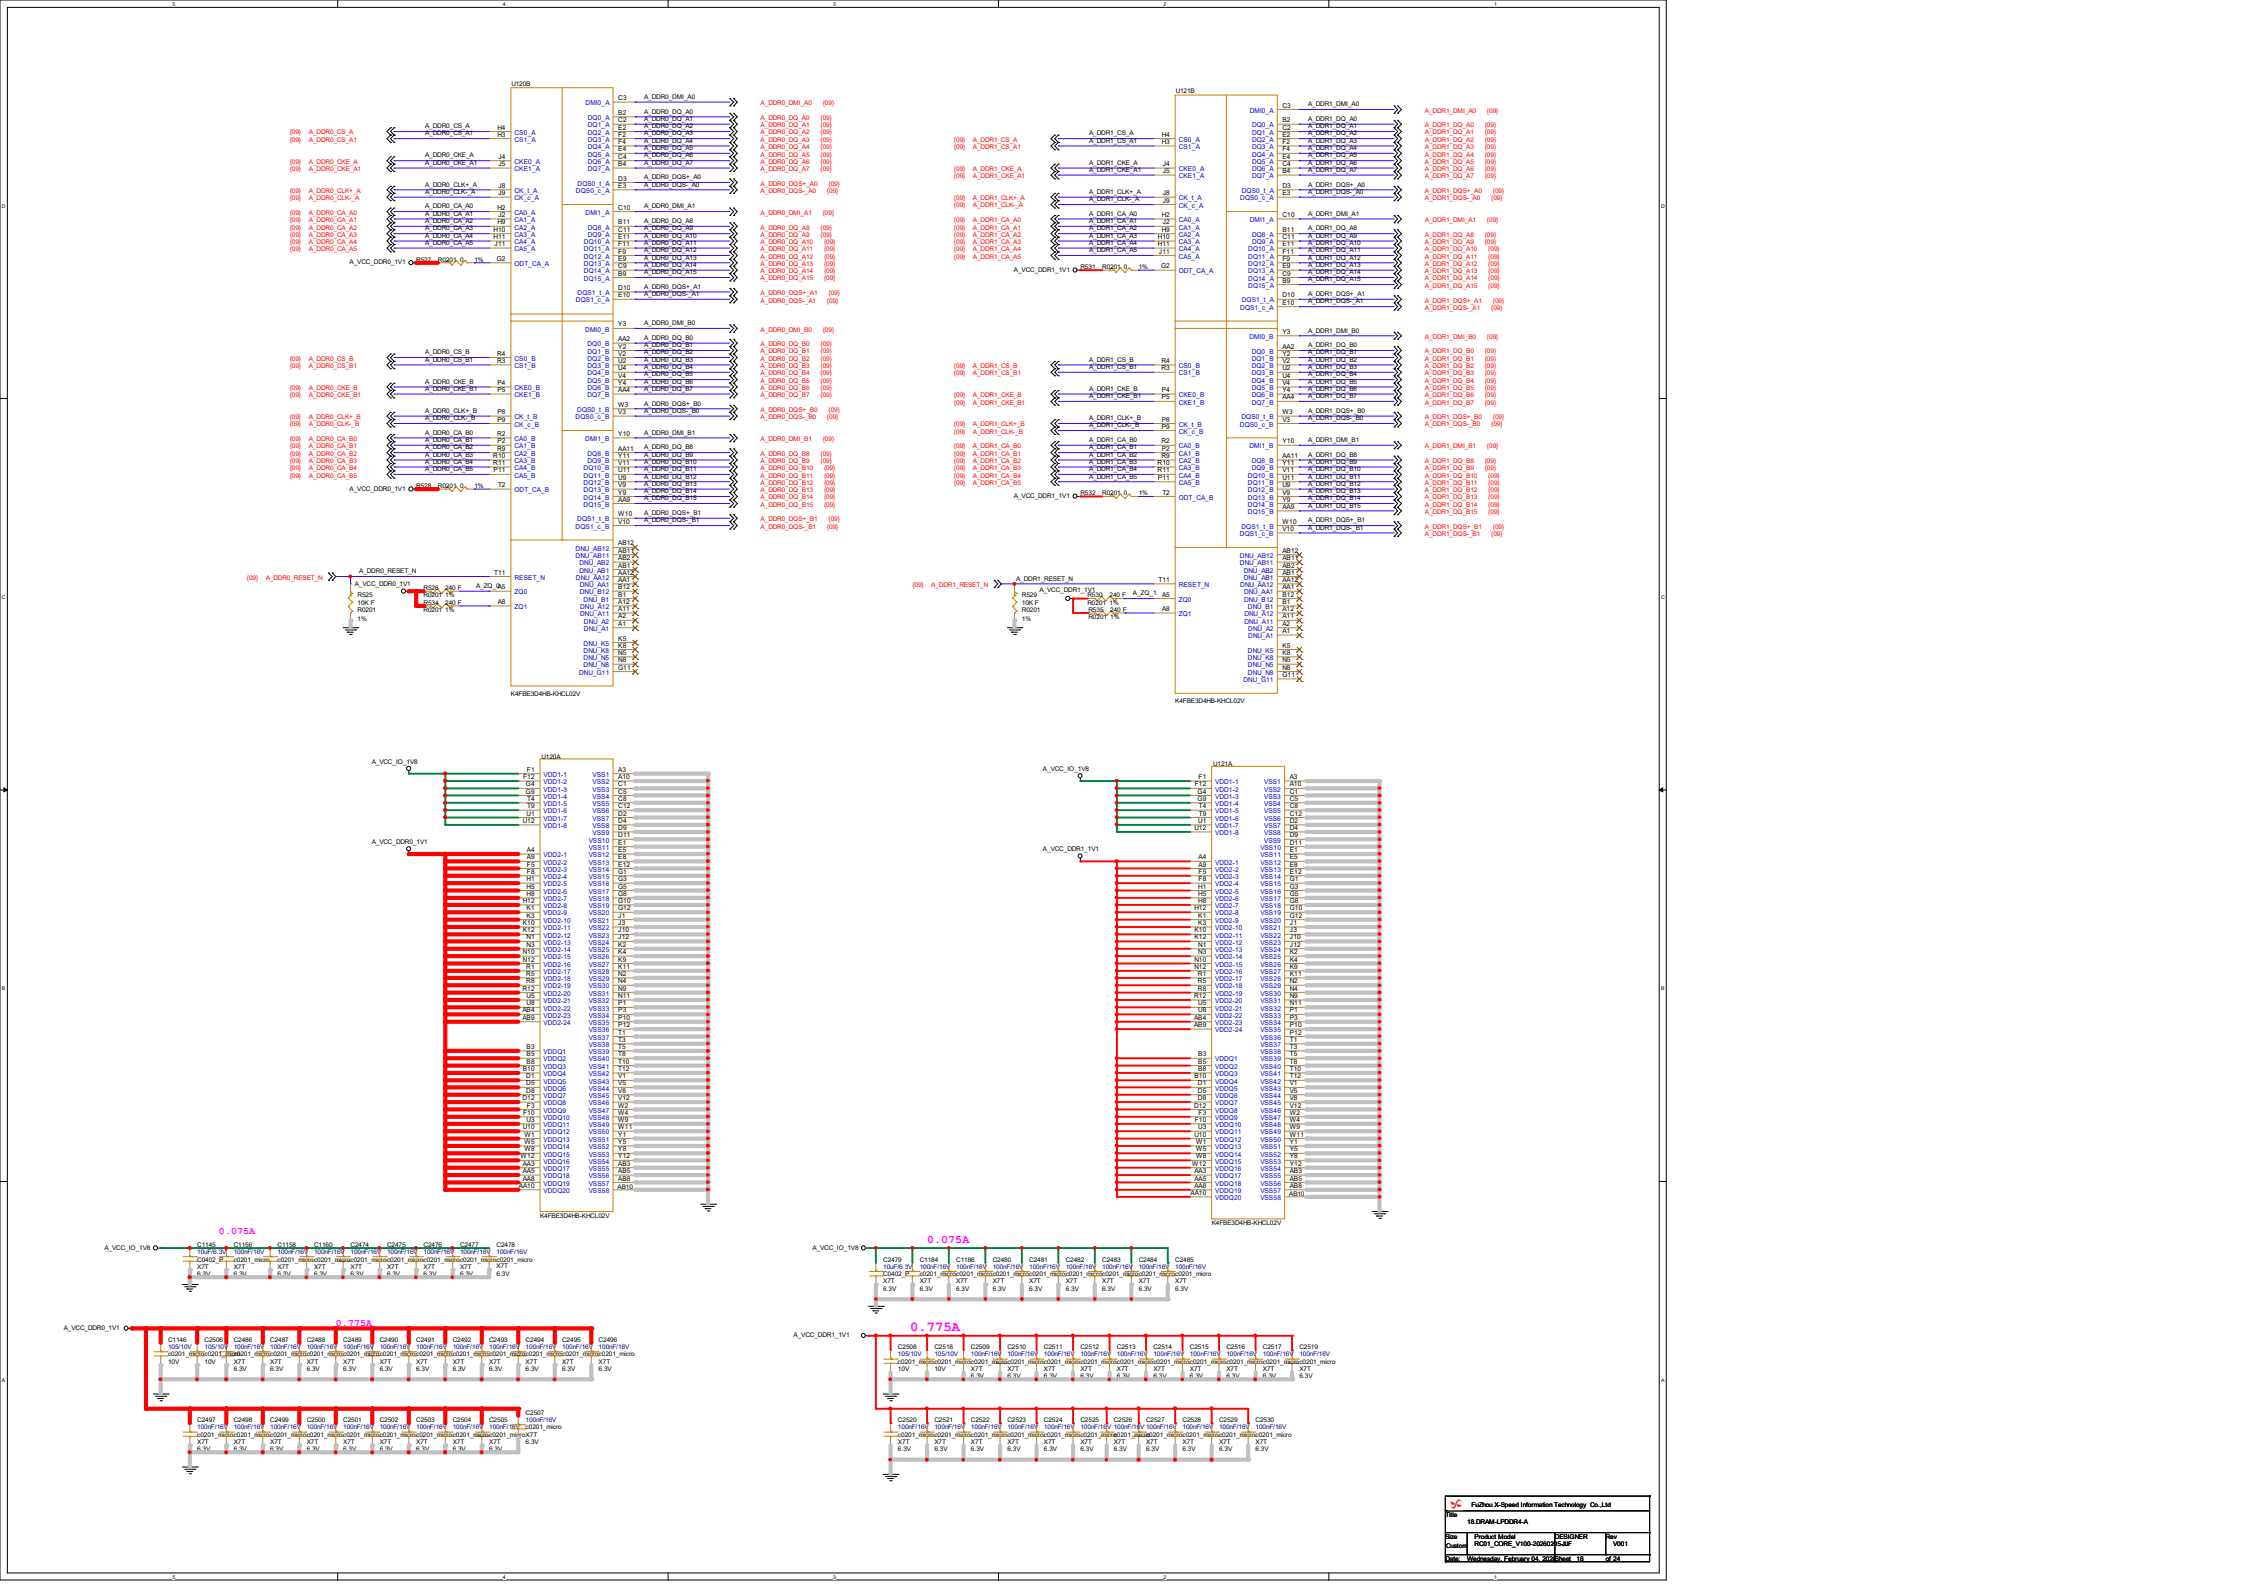

Fuzhou X-Speed Information Technology Co.,Ltd			
Title	18.DRAM-LPDDR4-A		
Size: A3	Product Model: RD01_CORE_V100-20260205	DESIGNER: S-AIF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 18 of 24		

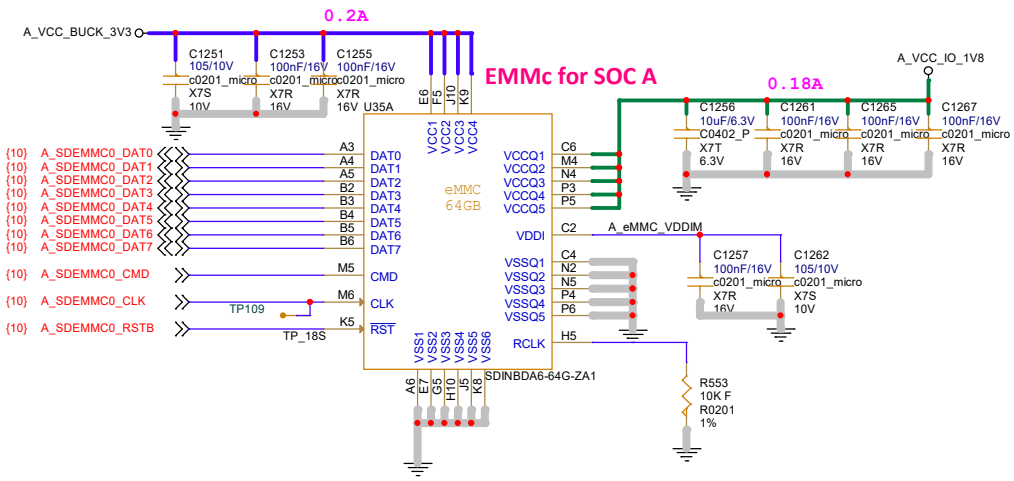

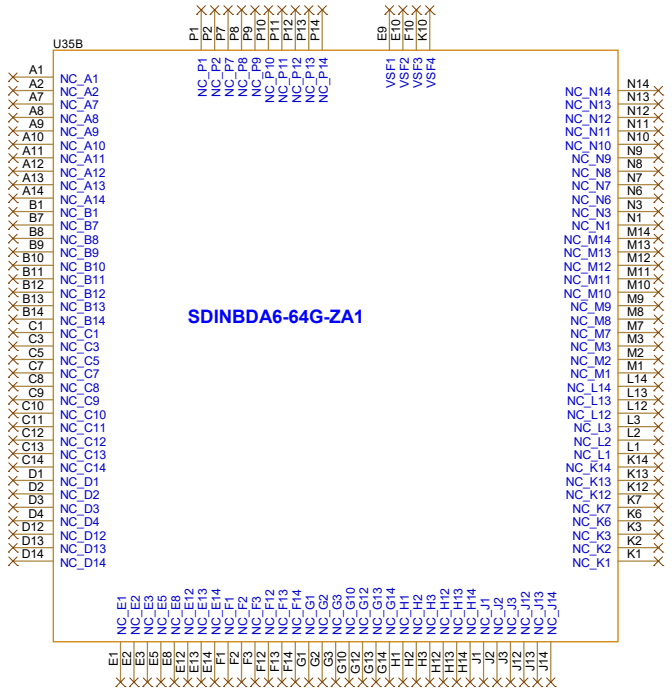

如果要用EEPROM需要选工业级物料

M24C02-DRMF3TG/K

M24C04-DRMF3TG/K


GT24C02C-2UDLA2-TR

GT24C04B-2UDLA2-TR

ID EEPROM


0x50 (7b) 2Kbit

0x51 (7b) 2Kbit

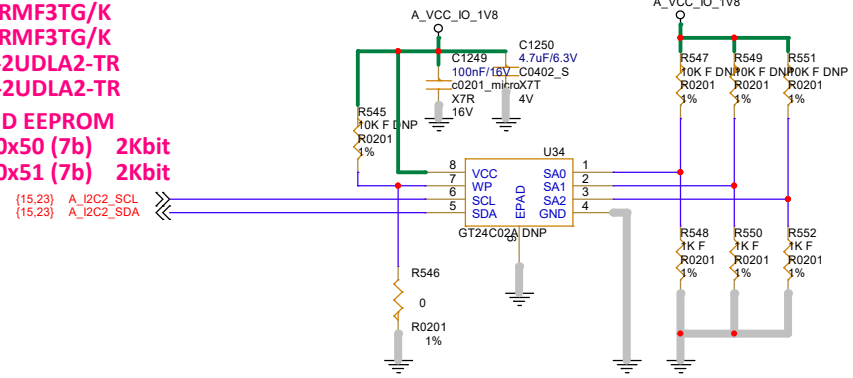


FuZhou X-Speed Information Technology Co.,Ltd

Title	19.eMMC FLASH		
Size A3	Product Model RC01_CORE_V100-20260205	DESIGNER JF	Rev V001
Date: Thursday, February 05, 2026	Sheet 19	of 24	

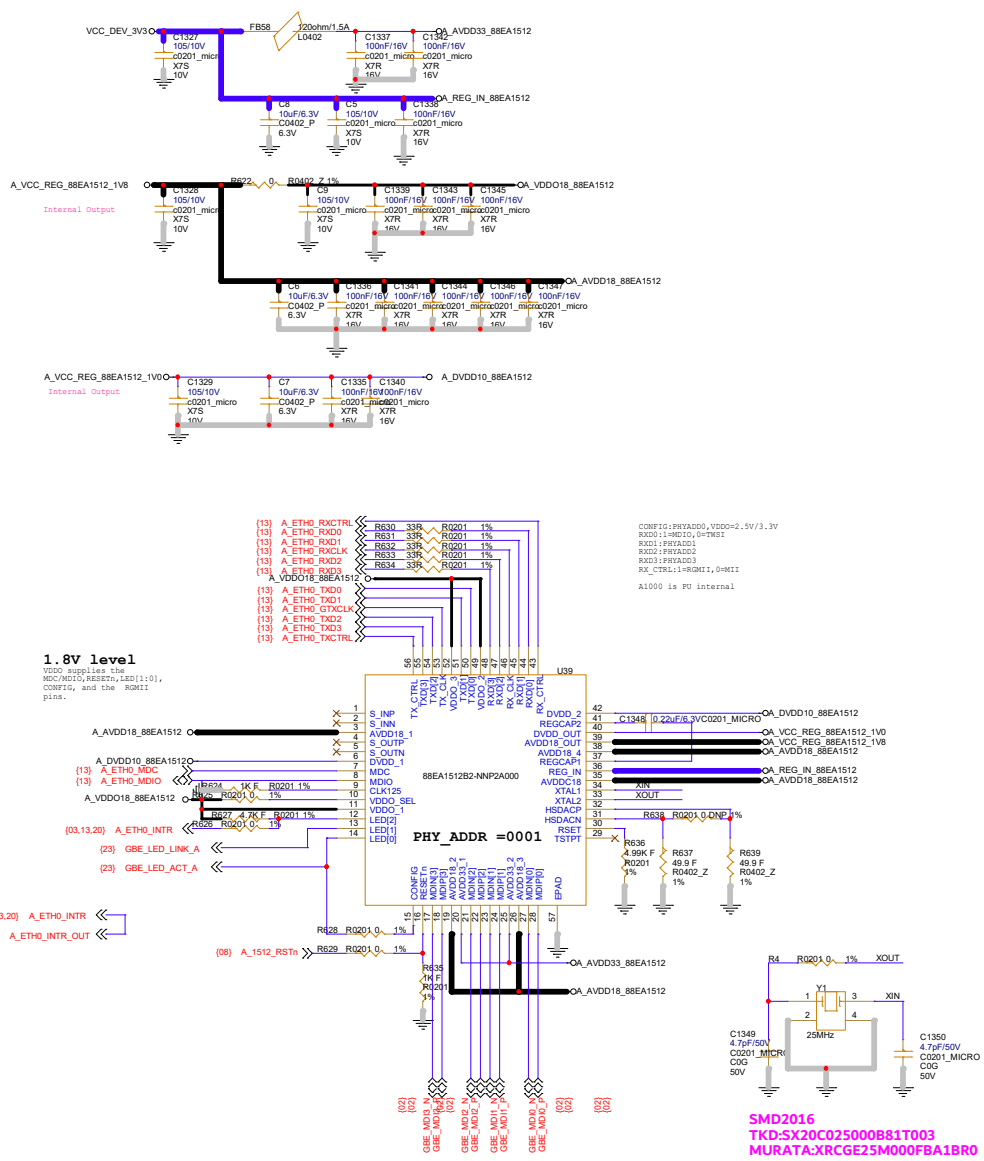


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 20.ETH_PHY&CONVERTOR			
Size: Custom	Product Model: RC01_CORE_V100-20260205	DESIGNER: GWF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 20	of 24	

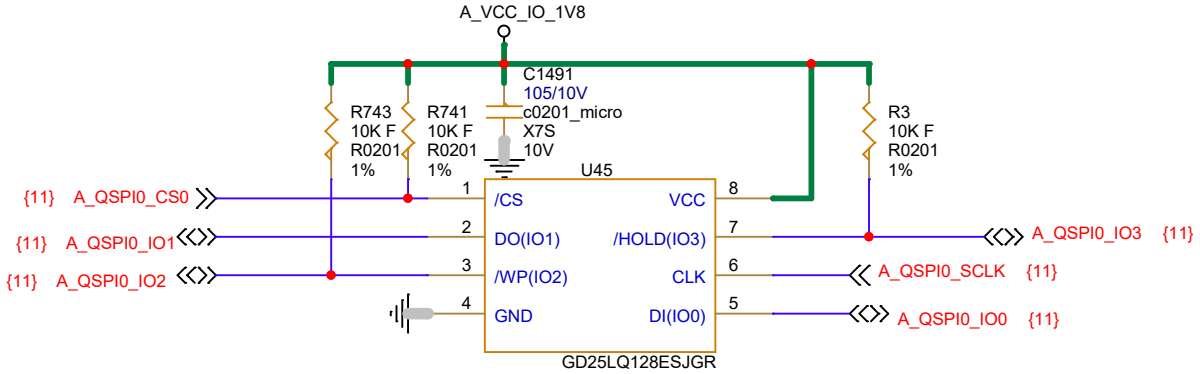


When Norflash is under 128Mb, not use RST.


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 21.QSPI FLASH_BOOT			
Size: A4	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Wednesday, February 04, 2026	Sheet 21	of 24	

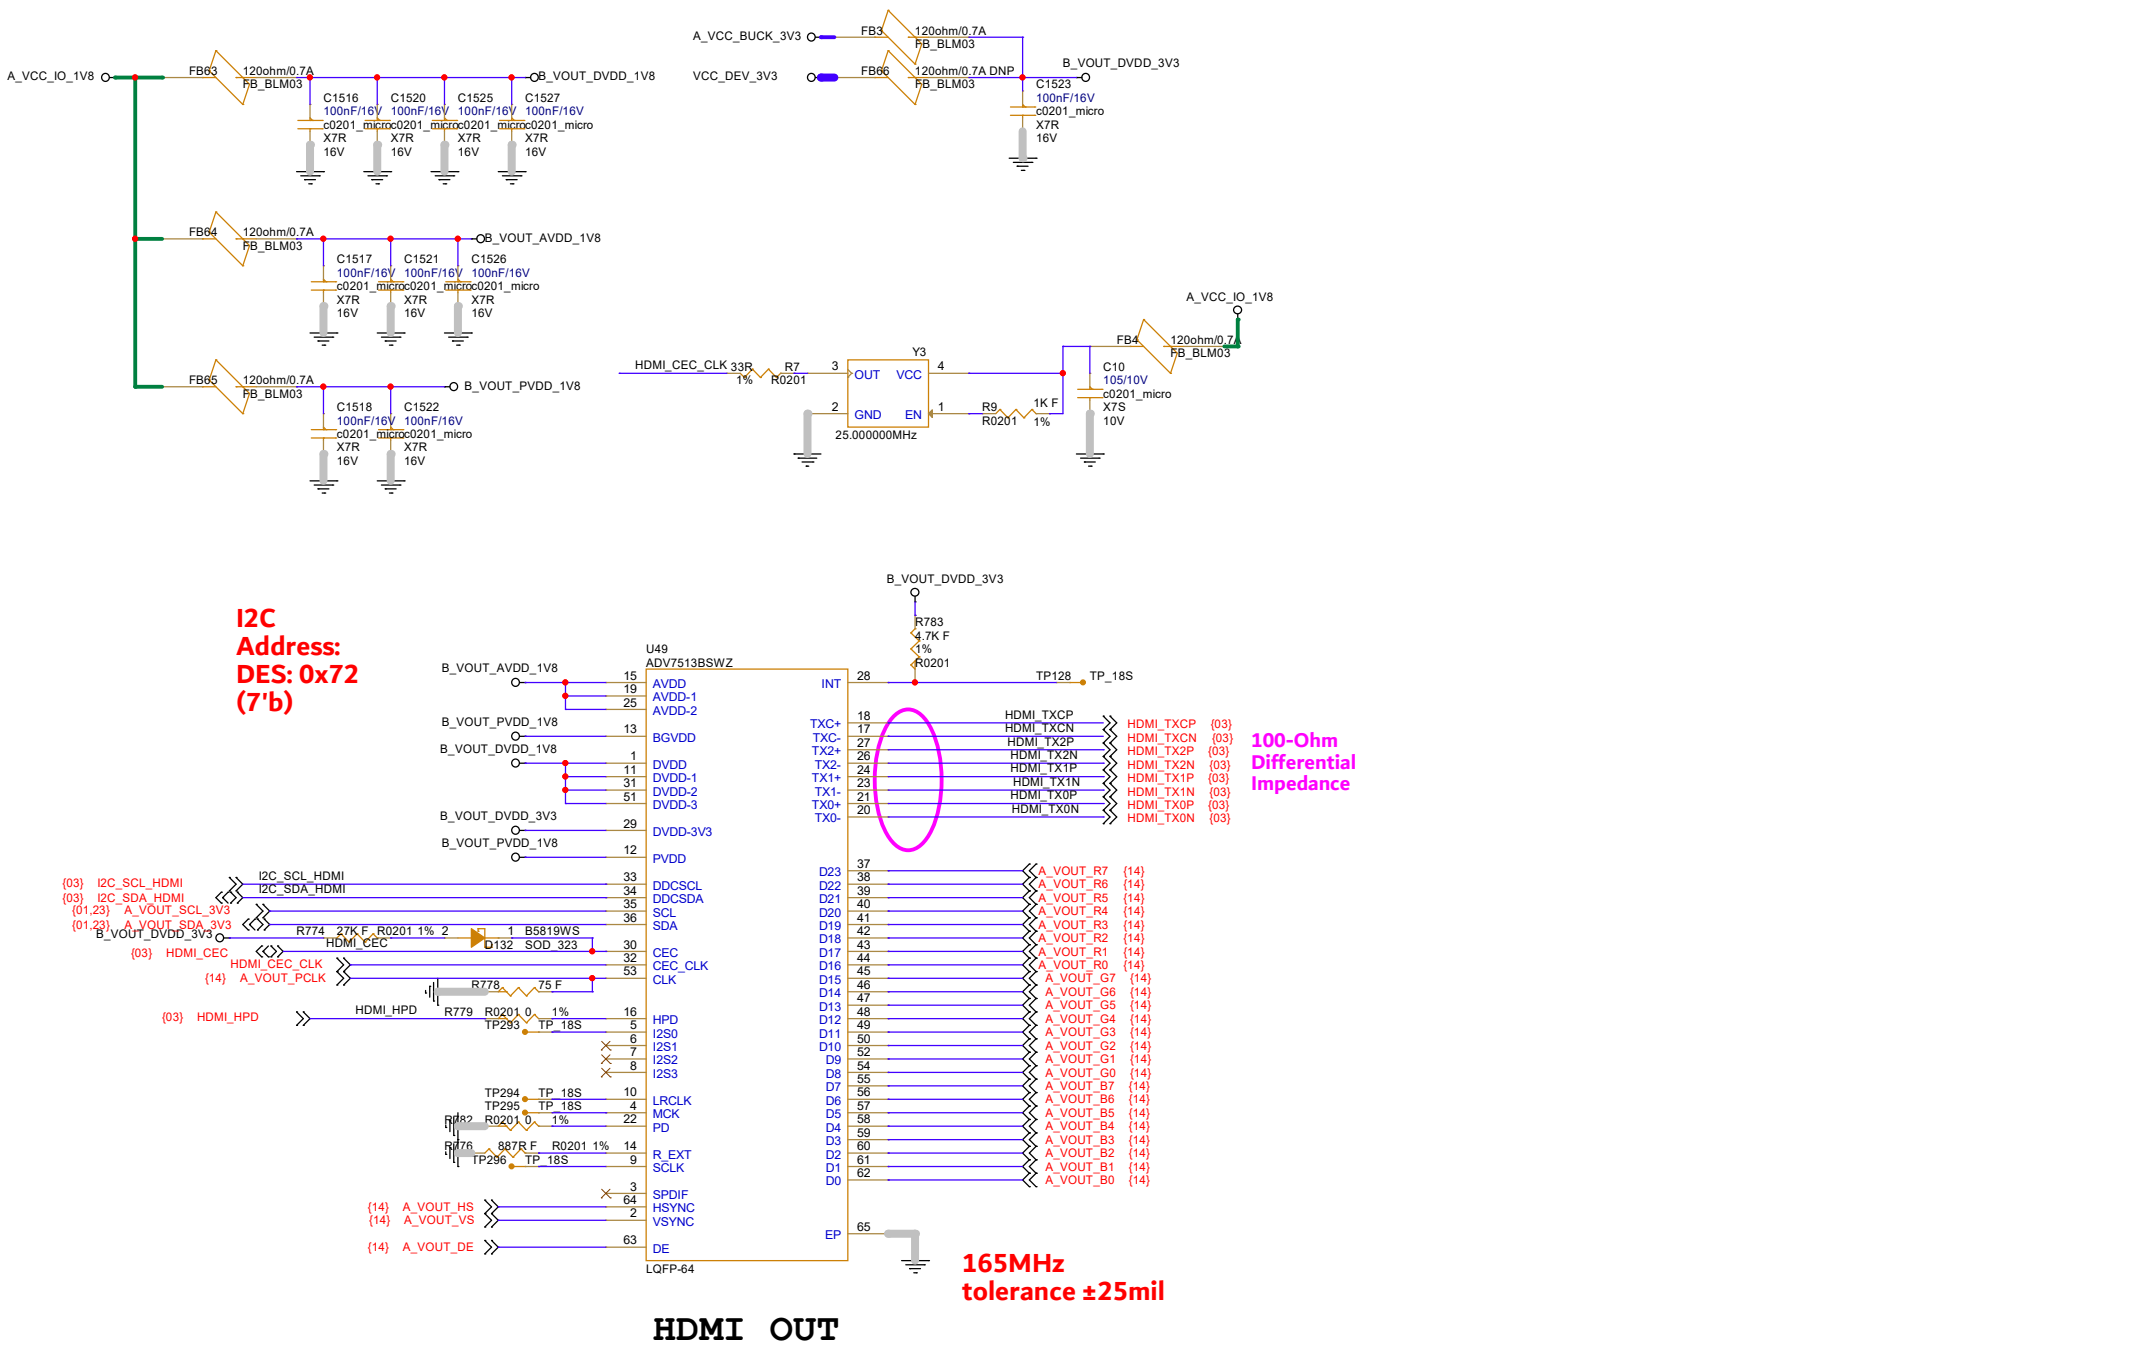


HDMI OUT

FuZhou X-Speed Information Technology Co.,Ltd			
Title: 22.VIDEO_Interface_A1000_B			
Size: A3	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 22	of 24	

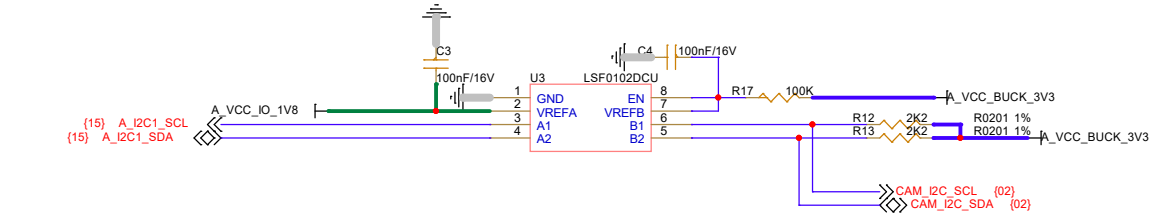


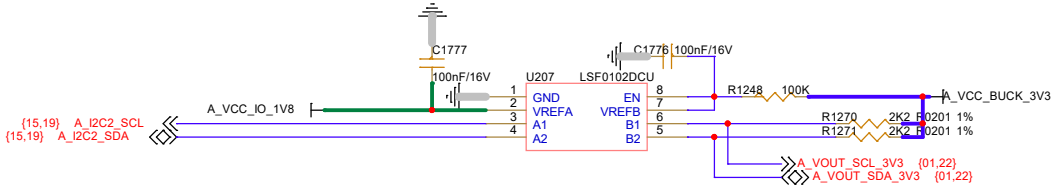


线序可调

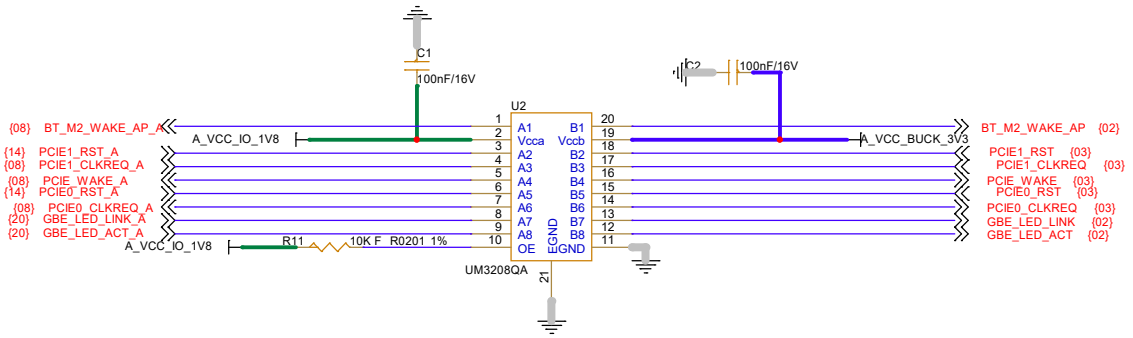


FuZhou X-Speed Information Technology Co.,Ltd			
Title: 23.Interface &Supervision			
Size: A3	Product Model: RC01_CORE_V100-20260205	DESIGNER: JF	Rev: V001
Date: Thursday, February 05, 2026	Sheet 23	of 24	

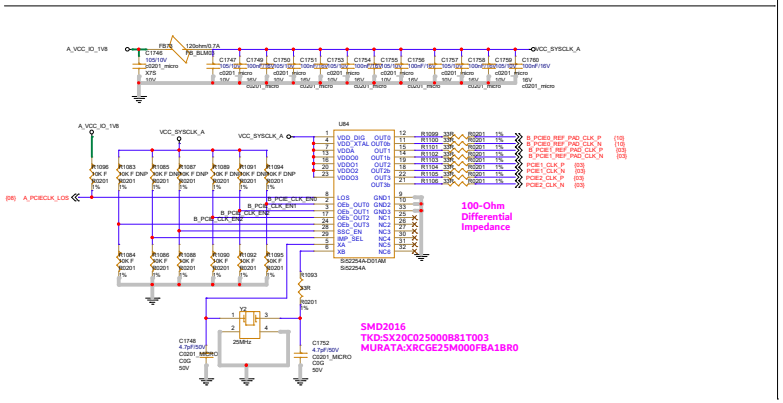

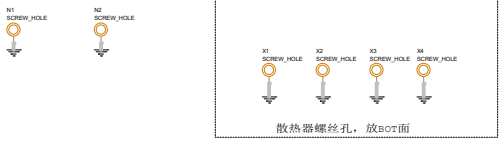



SOC_A
Strap pins pull-up/pull-down

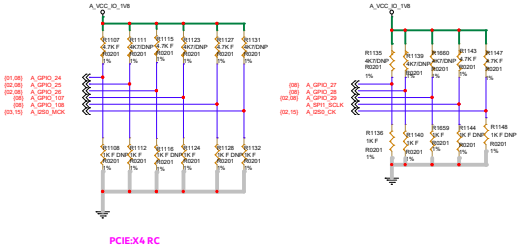

Ball name	Strap Pin Name	Description	Configure
GPIO_24	r5_lock_step	Safety R5 work on lock-step mode 1:enable 0:disable	1
I2S0_CK	sys_parity_en	System parity enable 1:enable 0:disable	1
SPI1_SCLK	sys_ecc_en	System ecc enable 1:enable 0:disable	1
GPIO_107	ist_post_bypass	On-chip dma-based bist 1:bypass 0:no bypass	0
GPIO_26	ist_post_auto_mode	1:auto mode 0:manual mode	1
GPIO_29	boot_mode_sel[2]	Boot mode select 000:sec boot from norflash with hardware authorize xlx:app dev boot 100:sec boot from nor-flash 101:sec boot from emmc	000
GPIO_28	boot_mode_sel[1]		
GPIO_27	boot_mode_sel[0]		
GPIO_25	DDR_Rank	1:Single Rank 0:Double Rank	0

Strap PINs for PCIe		PCIe Controller 0				PCIe Controller 1			
I2S0_MCK (bifurcation_en)	GPIO_108 (x4_is_rc)	Enabled	Max Link Width	PHY Lanes Assigned	Mode	Enabled	Max Link Width	PHY Lanes Assigned	Mode
0	0	Yes	4	lane 0, 1, 2, 3	EP	No	-	None	EP
0	1	Yes	4	lane 0, 1, 2, 3	RC	No	-	None	EP
1	0	Yes	2	lane 0, 1	EP	Yes	2	lane 2, 3	EP
1	1	Yes	2	lane 0, 1	RC	Yes	2	lane 2, 3	EP

FuZhou X-Speed Information Technology Co.,Ltd

File: 24.Connector &Strapin

Size	Product Model	DESIGNER	Rev
A1	RCB1_CORE_V100-20260205-3JF		V001

Date: Thursday, February 05, 2026 Sheet 24 of 24