CIS352 Intro to Enterprise Computing

Chapter 4 & 5 Assignment

Using Chapter 4's PowerPoint as a reference, create a new JCL and COBOL files, along with a GitHub repository, to generate the RPT3000 below.

```
DATE:   03/19/2026                YEAR-TO-DATE SALES REPORT                          PAGE:    1
TIME:   10:11                                                                        RPT3000

BRANCH SALES CUST                                  SALES        SALES        CHANGE     CHANGE
 NUM    REP  NUM    CUSTOMER NAME                 THIS YTD     LAST YTD     AMOUNT     PERCENT
------ ----- -----  --------------------         ----------   ----------   ----------  ------
  12    12   11111  INFORMATION BUILDERS          1,234.56     1,111.11       123.45     11.1
        12   12345  CAREER TRAINING CTR          12,345.67    22,222.22     9,876.55-    44.4-
                                               ------------ ------------ ------------   ------
                             BRANCH TOTAL        13,580.23    23,333.33     9,753.10-    41.8- *

  22    10   22222  HOMELITE TEXTRON CO          34,545.00         0.00    34,545.00    999.9
        14   34567  NEAS MEMBER BENEFITS            111.11         0.00       111.11    999.9
        14   55555  PILOT LIFE INS. CO.          10,000.00     1,000.00     9,000.00    900.0
                                               ------------ ------------ ------------   ------
                             BRANCH TOTAL        44,656.11     1,000.00    43,656.11    999.9  *

  34    10   00111  DAUPHIN DEPOSIT BANK         14,099.00    19,930.00     5,831.00-    29.3-
        10   54321  AIRCRAFT OWNERS ASSC          5,426.12    40,420.00    34,993.88-    86.6-
        17   33333  NORFOLK CORP                  6,396.35     4,462.88     1,933.47     43.3
                                               ------------ ------------ ------------   ------
                             BRANCH TOTAL        25,921.47    64,812.88    38,891.41-    60.0- *

  47    11   12121  GENERAL SERVICES CO.         11,444.00    11,059.56       384.44      3.5
        11   24680  INFO MANAGEMENT CO.          17,481.45    11,892.47     5,588.98     47.0
        21   99999  DOLLAR SAVINGS BANK           5,059.00     4,621.95       437.05      9.5
        21   76543  NATL MUSIC CORP.              2,383.46     4,435.26     2,051.80-    46.3-
                                               ------------ ------------ ------------   ------
                             BRANCH TOTAL        36,367.91    32,009.24     4,358.67     13.6  *

                                               ============ ============ ============   ======
                             GRAND TOTAL        241,051.44   242,310.90     1,259.46-     0.5- **
```

This assignment continues on the next page...

Using Chapter 5's PowerPoint as a reference, create a new JCL and COBOL files, along with a new GitHub repository, to generate the RPT5000 below.

```
DATE:  03/19/2026                YEAR-TO-DATE SALES REPORT                          PAGE:    1
TIME:  17:33                                                                        RPT5000

BRANCH SALES CUST                                SALES        SALES        CHANGE     CHANGE
 NUM    REP  NUM    CUSTOMER NAME              THIS YTD     LAST YTD      AMOUNT    PERCENT
------ ----- -----  --------------------      ----------   ----------   ----------   ------
  12    12   11111  INFORMATION BUILDERS       1,234.56     1,111.11       123.45     11.1
             12345  CAREER TRAINING CTR       12,345.67    22,222.22     9,876.55-    44.4-
                            SALESREP TOTAL   13,580.23    23,333.33     9,753.10-    41.8- *
                            BRANCH TOTAL     13,580.23        41.79-   13,622.02    999.9  **

  22    10   22222  HOMELITE TEXTRON CO       34,545.00         0.00    34,545.00    999.9
                            SALESREP TOTAL   34,545.00         0.00    34,545.00    999.9  *
        14   34567  NEAS MEMBER BENEFITS         111.11         0.00       111.11    999.9
             55555  PILOT LIFE INS. CO.       10,000.00     1,000.00     9,000.00    900.0
                            SALESREP TOTAL   10,111.11     1,000.00     9,111.11    911.1  *
                            BRANCH TOTAL     44,656.11       911.11    43,745.00    999.9  **

  34    10   00111  DAUPHIN DEPOSIT BANK      14,099.00    19,930.00     5,831.00-    29.3-
             54321  AIRCRAFT OWNERS ASSC       5,426.12    40,420.00    34,993.88-    86.6-
                            SALESREP TOTAL   19,525.12    60,350.00    40,824.88-    67.6- *
        17   33333  NORFOLK CORP               6,396.35     4,462.88     1,933.47     43.3
                            SALESREP TOTAL    6,396.35     4,462.88     1,933.47     43.3  *
                            BRANCH TOTAL     25,921.47        24.32-   25,945.79    999.9  **

  47    11   12121  GENERAL SERVICES CO.      11,444.00    11,059.56       384.44      3.5
             24680  INFO MANAGEMENT CO.       17,481.45    11,892.47     5,588.98     47.0
                            SALESREP TOTAL   28,925.45    22,952.03     5,973.42     26.0  *
        21   99999  DOLLAR SAVINGS BANK        5,059.00     4,621.95       437.05      9.5
             76543  NATL MUSIC CORP.           2,383.46     4,435.26     2,051.80-    46.3-
                            SALESREP TOTAL    7,442.46     9,057.21     1,614.75-    17.8- *
                            BRANCH TOTAL     36,367.91         8.20    36,359.71    999.9  **

                            GRAND TOTAL     241,051.44   122,008.65    19,042.79     15.6  ***
```

Pseudocode for RPT5000

Test after change step:

1. Initial Changes:
    - Change program name
    - Change output file name in your ENVIRONMENT, DATA, & PROCEDURE divisions

2. Change Working Storage SWITCHES to use a switch condition (see slide 17, 18, 7, 45)
    - Change your working storage SWITCHES (see slide 17)

```
01  SWITCHES.
     05  CUSTMAST-EOF-SWITCH      PIC X   VALUE "N".
         88 CUSTMAST-EOF                   VALUE "Y".
     05  FIRST-RECORD-SWITCH      PIC X   VALUE "Y".
         88 FIRST-RECORD                   VALUE "Y" FALSE "N".
```

https://www.ibm.com/docs/en/cobol-zos/6.3.0?topic=vc-format-2

Format 2: condition-name value

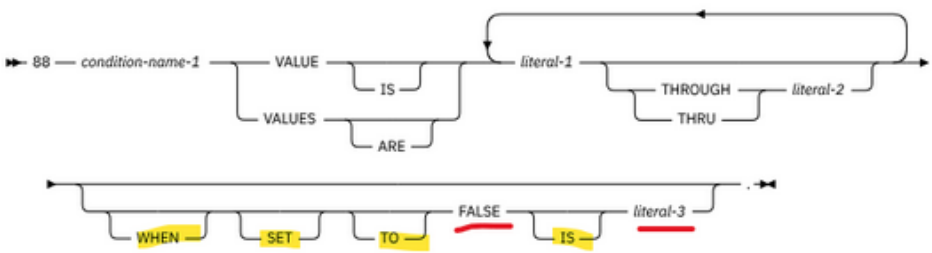


```
DATA DIVISION.
WORKING-STORAGE SECTION.
01  PROGRAM-STATUS      PIC X.
    88  END-PROGRAM     VALUE 'Y' WHEN SET TO FALSE IS 'N'.
```

    - Change the following paragraphs (see slide 18, 7, & 45)
        - 300-PREPARE-SALES-LINES
        - 310-READ-CUSTOMER-RECORD
        - 320-PRINT-CUSTOMER-LINE

3. Additional Working Storage Changes:
    - Add an OLD-SALESREP-NUMBER to the CONTOL-FIELDS as the first data item
    - Working Add SALESREP totals to your TOTAL-FIELDS working storage data items
    - Change your HEADING-LINE-2 to RPT5000
    - Change CUSTOMER-LINE to display SALESREP as a PIC X(2) because there will be times we move spaces to it.
    - Add SALESREP-TOTAL-LINE similar to BRANCH-TOTAL-LINE
    - Make sure the SALESREP, BRANCH, and GRAND total lines display the correct number of *

4. Add logic for handling SALESREP changes
    - Add 355-PRINT-SALESREP-LINE similar to 360-PRINT-BRANCH-LINE

    - Add a WHEN block to 300-PREPARE-SALES-LINE for handing SALESREP change similar to how BRANCH change works (see slide 54)

5. Change 320-PRINT-CUSTOMER-LINE
    - Move the SALESREP or SPACES to the report similar to how it's already handling it for BRANCH.
    - When the BRANCH changes you will want to also move SALESREP to the report
    - PLUS, you might also want to convert the IF-ELSE to an EVALUATE statement too (similar to how you did it in step 4)
    - Instead of adding to the BRANCH totals, add to the SALESREP totals

Additional requirements:

1) Must use GitHub
    a. Invite me to your repository (dejohns2)
    b. Numerous commits which will prove who did work
    c. Use folders to organize your files in your repository.
    d. Balance work across code and README
        i. Fully explain what the program does
        ii. Embedded screenshots (stored in a subfolder)
        iii. Bullet point list of what new concepts were used
        iv. links to the author's profiles

2) Include either a peer-review or self-review

3) Attach the following files to your assignment: your Good, Bad, and Ugly (GBU) reflection written at a college level. Must include a proper heading: (name, date, and assignment) plus BOTH of your GitHub URLs