

compressor-01-bearhug

Project Report

1. Readme


Bearhug

Guitar Pedal PCB based on Bearhug compressor.


Edit --- found a bug, and am now re-verifying this. Consider this unverified, though it passes sound ok.

All registered trademarks are owned by their respective owners.


2. Schematic

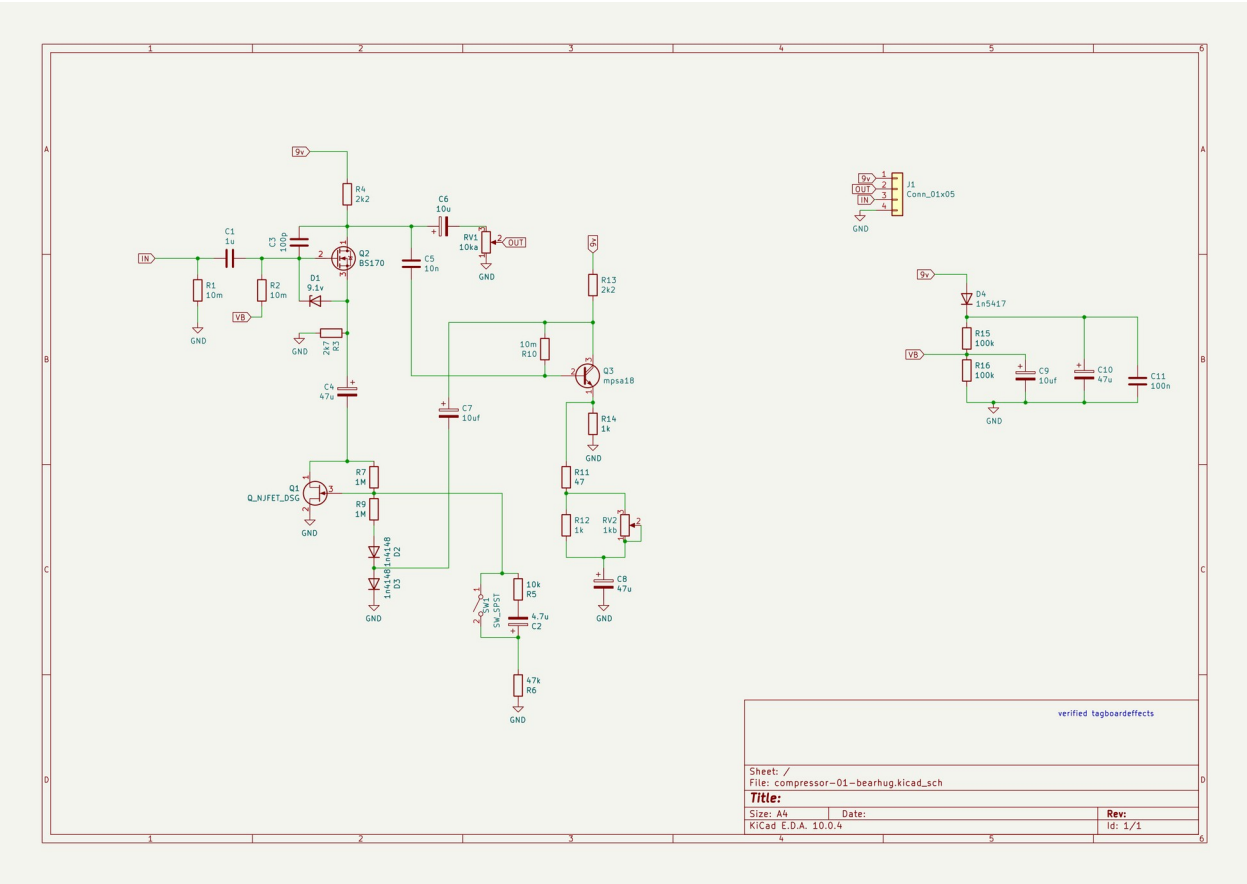

3. PCB F.Cu + Silkscreen

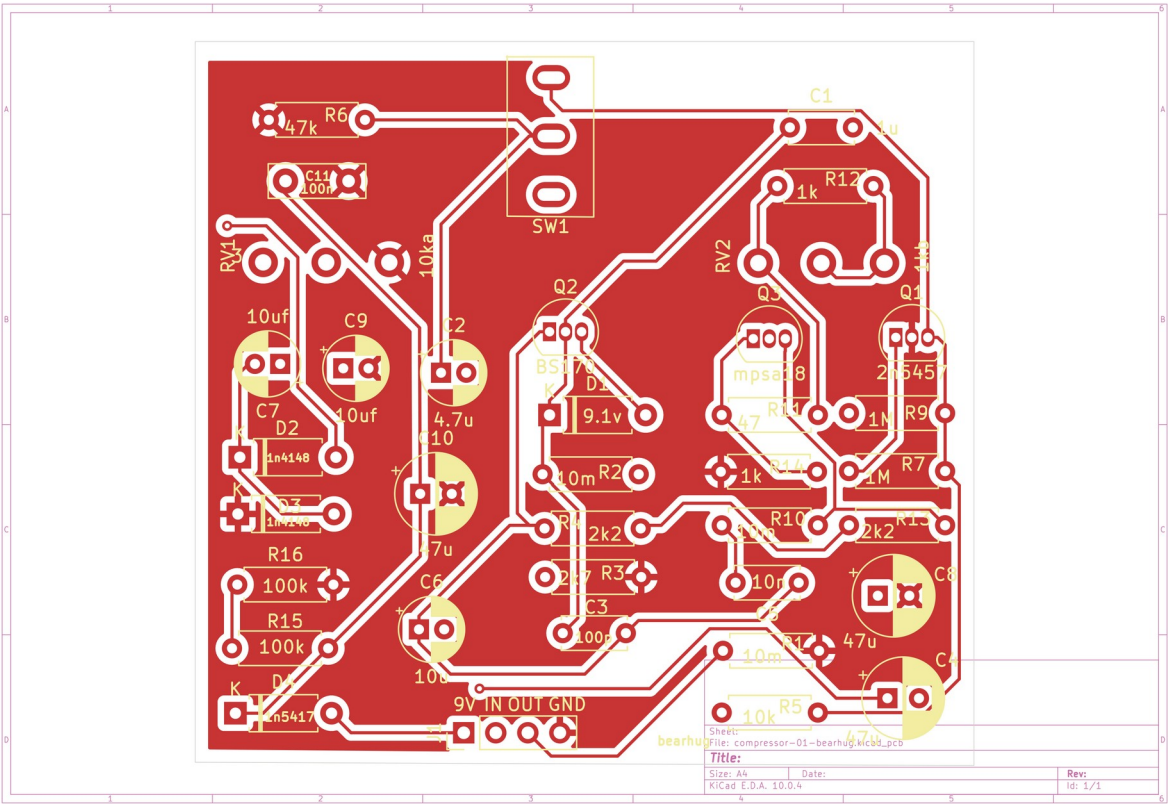

4. PCB B.CU + Silkscreen

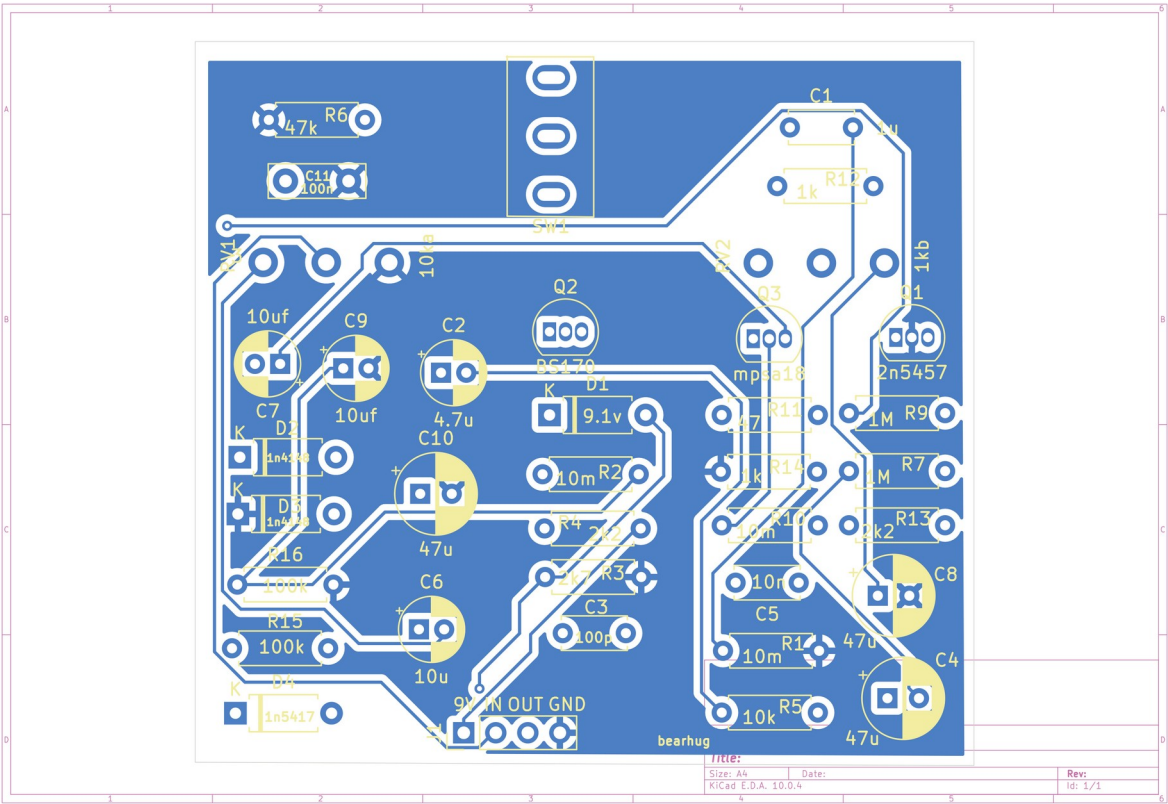

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1	1u	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P5.00mm	1	
C2	4.7u	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	1	
C3	100p	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P5.00mm	1	
C4,C8,C10	47u	Capacitor_THT: CP_Radial_D6.3mm_P2.50mm	3	
C5	10n	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P5.00mm	1	
C6	10u	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	1	
C7,C9	10uf	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	2	
C11	100n	Capacitor_THT: C_Disc_D7.5mm_W2.5mm_P5.00mm	1	
D1	9.1v	Diode_THT:D_A-405_P7.62mm_Horizontal	1	
D2,D3	1n4148	Diode_THT:D_A-405_P7.62mm	2	

		_Horizontal		
D4	1n5417	Diode_THT:D_A-405_P7.62mm_Horizontal	1	
J1	Conn_01x05	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
Q1	Q_NJFET_DSG	Package_TO_SOT_THT:TO-92_Inline	1	
Q2	BS170	Package_TO_SOT_THT:TO-92_Inline	1	
Q3	mpsa18	Package_TO_SOT_THT:TO-92_Inline	1	
R1,R2,R10	10m	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	3	
R3	2k7	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R4,R13	2k2	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	2	
R5	10k	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	

		al		
R6	47k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
R7,R9	1M	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R11	47	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
R12,R14	1k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R15,R16	100k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
RV1	10ka	pedals:Pot_Un derside	1	
RV2	1kb	pedals:Pot_Un derside	1	
SW1	SW_SPST	pedals:SWITC H-M1-SPDT	1	

Total line items: 27