

whitefuzz

Project Report

1. Readme


whitefuzz

This pedal is based on the Bearfoot FX artic white fuzz, which is apparently somewhat based on the fuzzface


First build used 2n5457 and while it made a distortion sound, it was very clippy. Researching other (dirtboxlayout, effectslayout, pedalpcb) forums, the recommendation was to use J113 (and a couple other jfets I did not have). Replacing this made this sound so much better.

All registered trademarks are owned by their respective owners.


2. Schematic

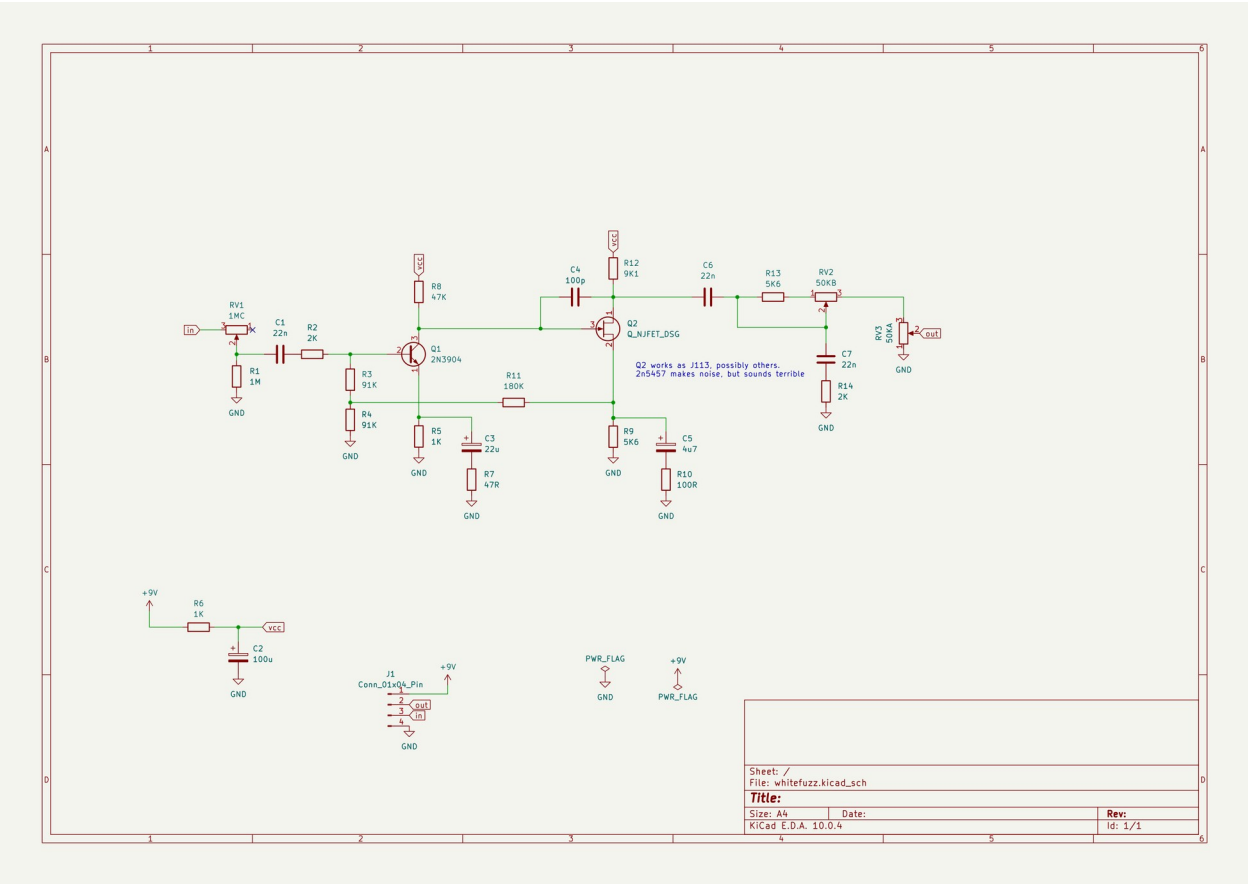

3. PCB F.Cu + Silkscreen

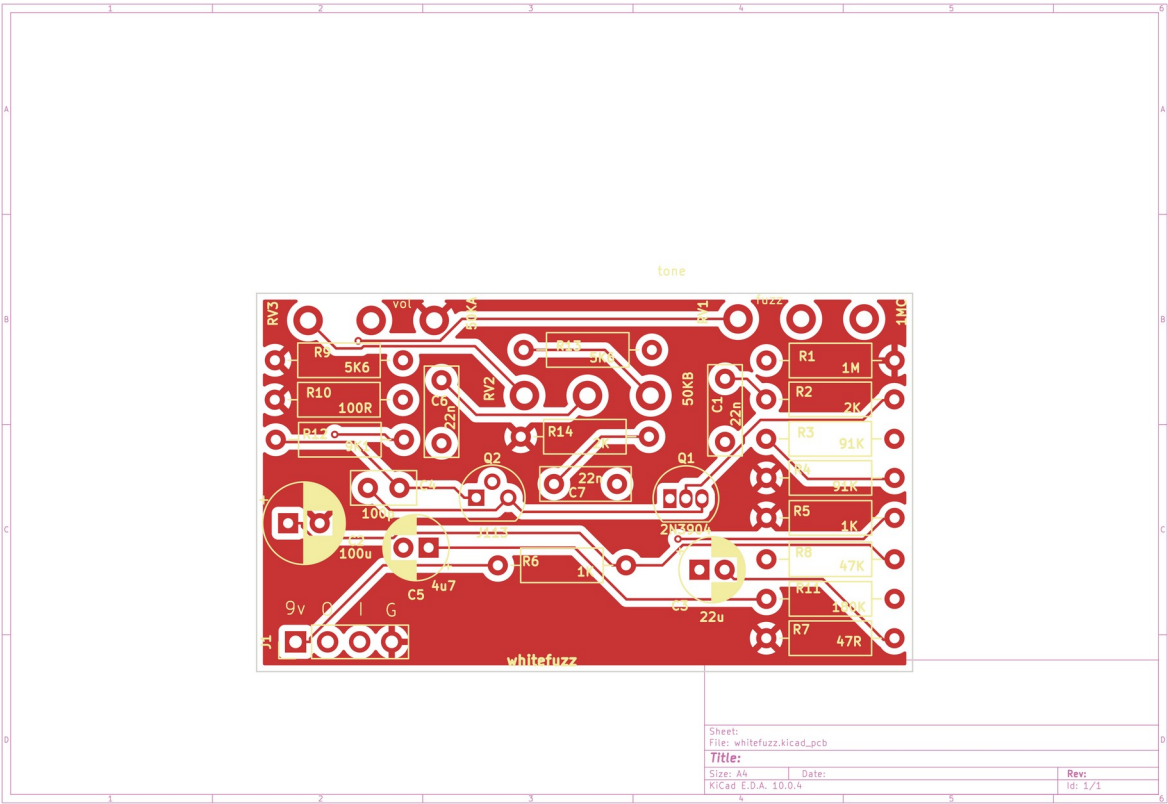

4. PCB B.CU + Silkscreen

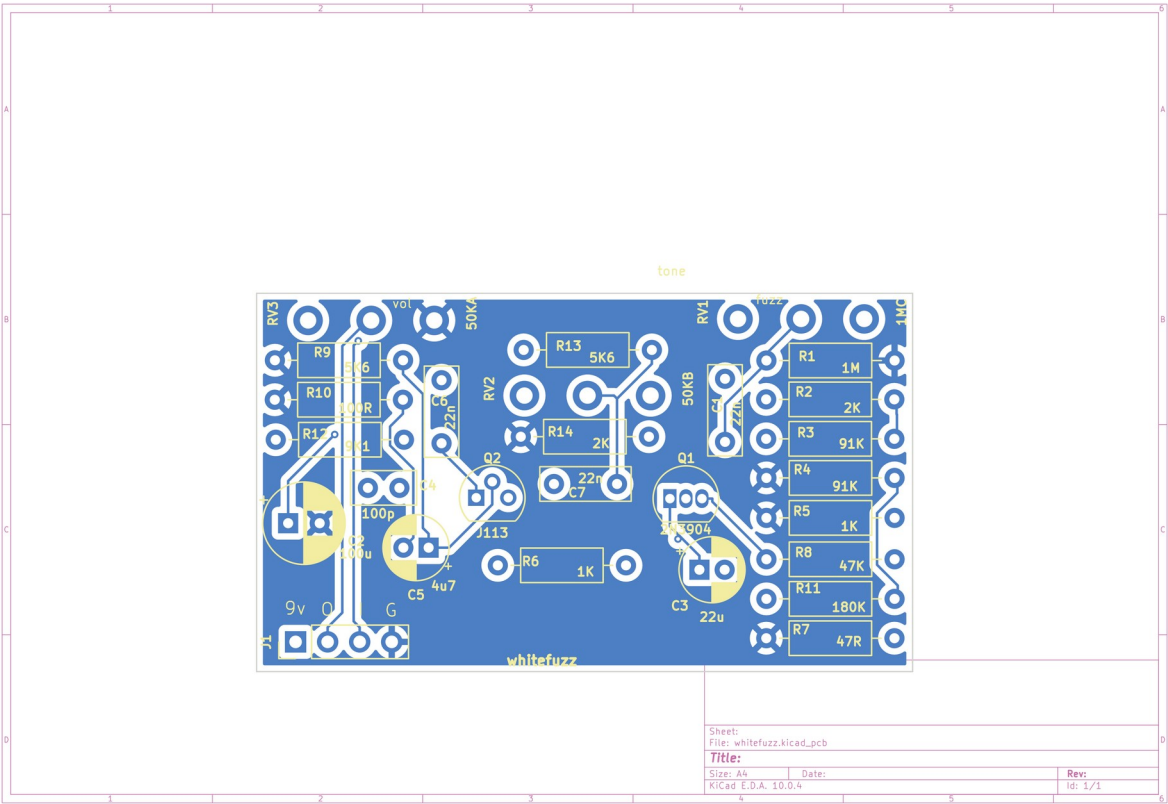

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1,C6,C7	22n	Capacitor_THT: C_Rect_L7.0mm_W2.5mm_P5.00mm	3	
C2	100u	Capacitor_THT: CP_Radial_D6.3mm_P2.50mm	1	
C3	22u	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	1	
C4	100p	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P2.50mm	1	
C5	4u7	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	1	
J1	Conn_01x04_Pin	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
Q1	2N3904	Package_TO_SOT_THT:TO-92_Inline	1	
Q2	Q_NJFET_DSG	Package_TO_SOT_THT:TO-92	1	
R1	1M	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P10.16mm_Horizontal	1	
R2,R14	2K	Resistor_THT: R_Axial_DIN0207_L6.3mm_D	2	

		2.5mm_P10.1 6mm_Horizon tal		
R3,R4	91K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	2	
R5,R6	1K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	2	
R7	47R	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
R8	47K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
R9,R13	5K6	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	2	
R10	100R	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
R11	180K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D	1	

		2.5mm_P10.1 6mm_Horizon tal		
R12	9K1	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
RV1	1MC	pedals:Pot_Un derside	1	
RV2	50KB	pedals:Pot_Un derside	1	
RV3	50KA	pedals:Pot_Un derside	1	

Total line items: 21