

ocd

Project Report

1. Readme


ocd

This is a clone of the Fulltone OCD overdrive.


This pedal is verified. I have not boxed this one yet.

All trademarks belong to their respective owners.


2. Schematic

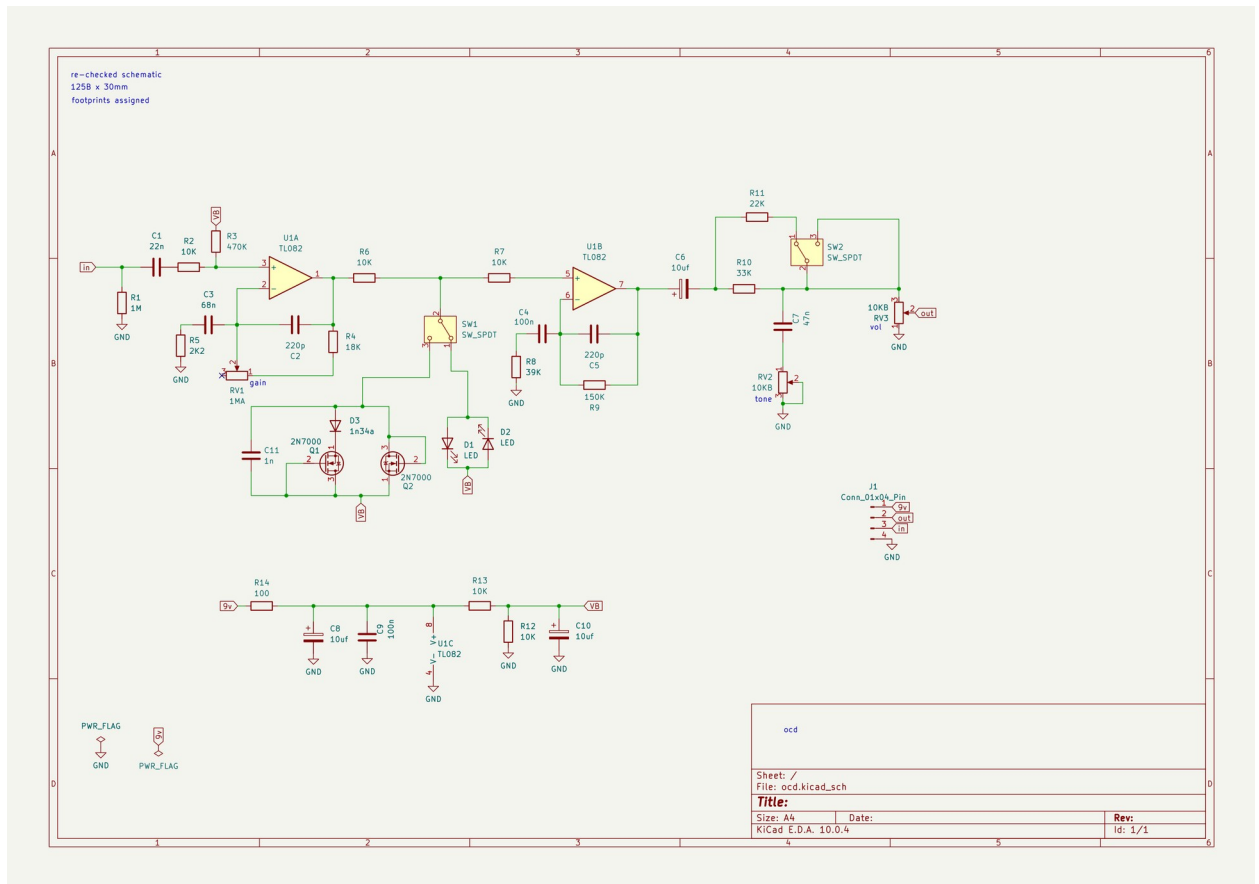

3. PCB F.Cu + Silkscreen

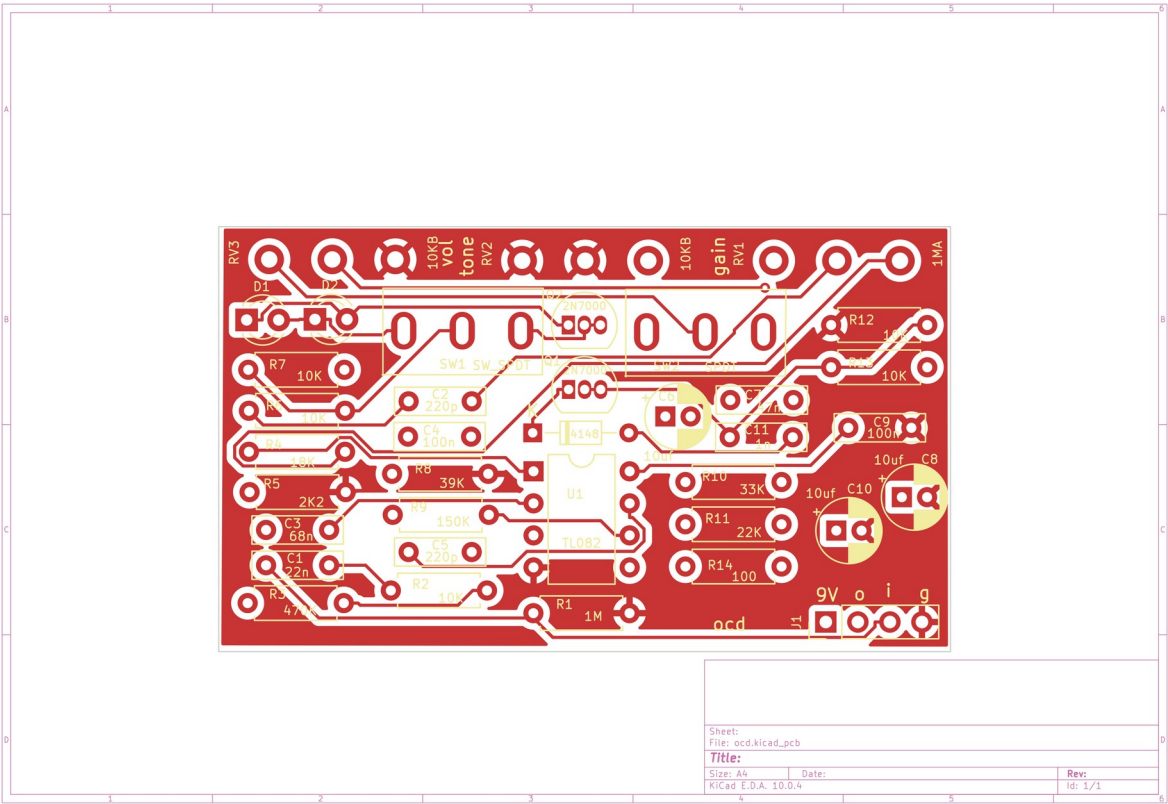

4. PCB B.CU + Silkscreen

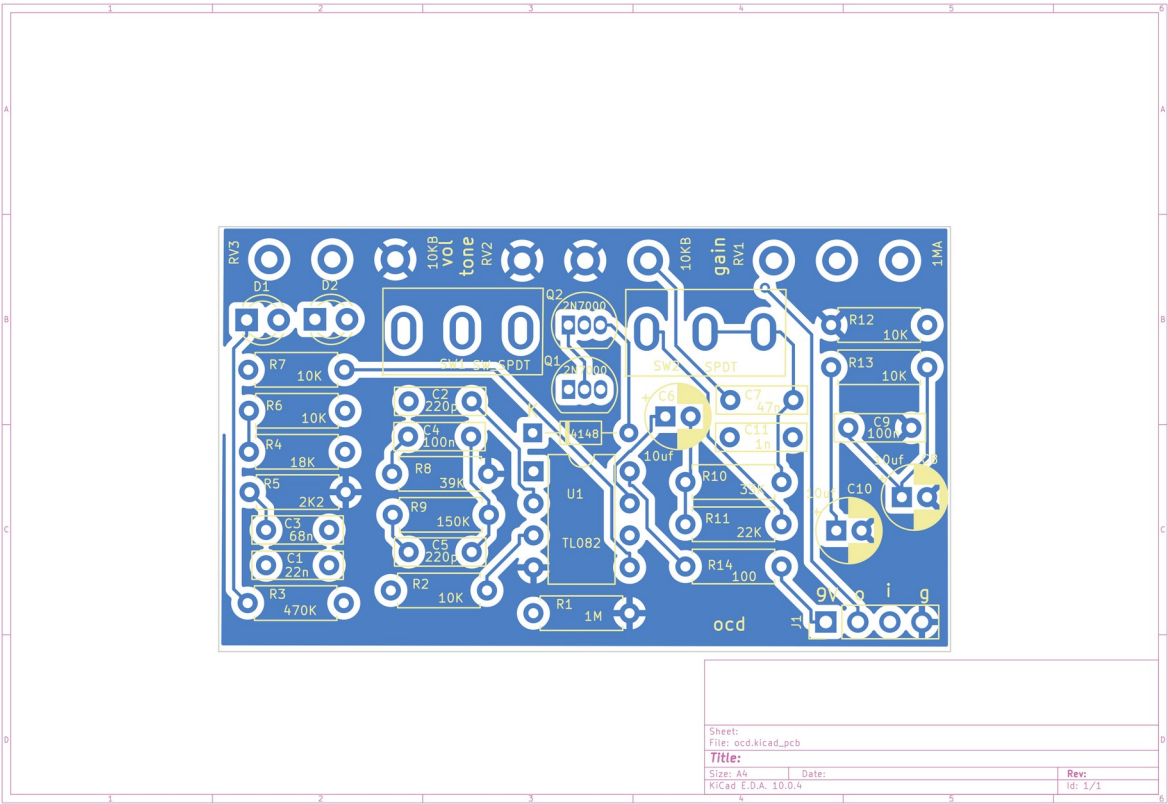

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1	22n	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	1	
C2,C5	220p	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	2	
C3	68n	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	1	
C4,C9	100n	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	2	
C6,C8,C10	10uf	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m m	3	
C7	47n	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	1	
C11	1n	Capacitor_THT :C_Rect_L7.0m m_W2.0mm_P 5.00mm	1	
D1,D2	LED	LED_THT:LED_ D3.0mm	2	
D3	1n34a	Diode_THT:D_ DO- 34_SOD68_P7. 62mm_Horizo ntal	1	
J1	Conn_01x04_P in	Connector_Pin Header_2.54m m:PinHeader_ 1x04_P2.54m	1	

		m_Vertical		
Q1,Q2	2N7000	Package_TO_SOT_THT:TO-92_Inline	2	
R1	1M	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R2,R6,R7,R12,R13	10K	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	5	
R3	470K	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R4	18K	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R5	2K2	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R8	39K	Resistor_THT:R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R9	150K	Resistor_THT:R_Axial_DIN02	1	

		07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al		
R10	33K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
R11	22K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
R14	100	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
RV1	1MA	pedals:Pot_Un derside	1	
RV2,RV3	10KB	pedals:Pot_Un derside	2	
SW1,SW2	SW_SPDT	pedals:SWITC H-M1-SPDT	2	
U1	TL082	Package_DIP: DIP- 8_W7.62mm	1	

Total line items: 25