

triple_wreck

Project Report

1. Readme

triple wreck


This is a clone of the Wampler triple wreck overdrive. Very nice overdrive. Very nice sound.

This is the 2nd version of the pedal. The first version was 3mm too wide to fit into a 125B.


So this pedal circuit is verified. I have not boxed this one yet, either.

All trademarks belong to their respective owners.


2. Schematic

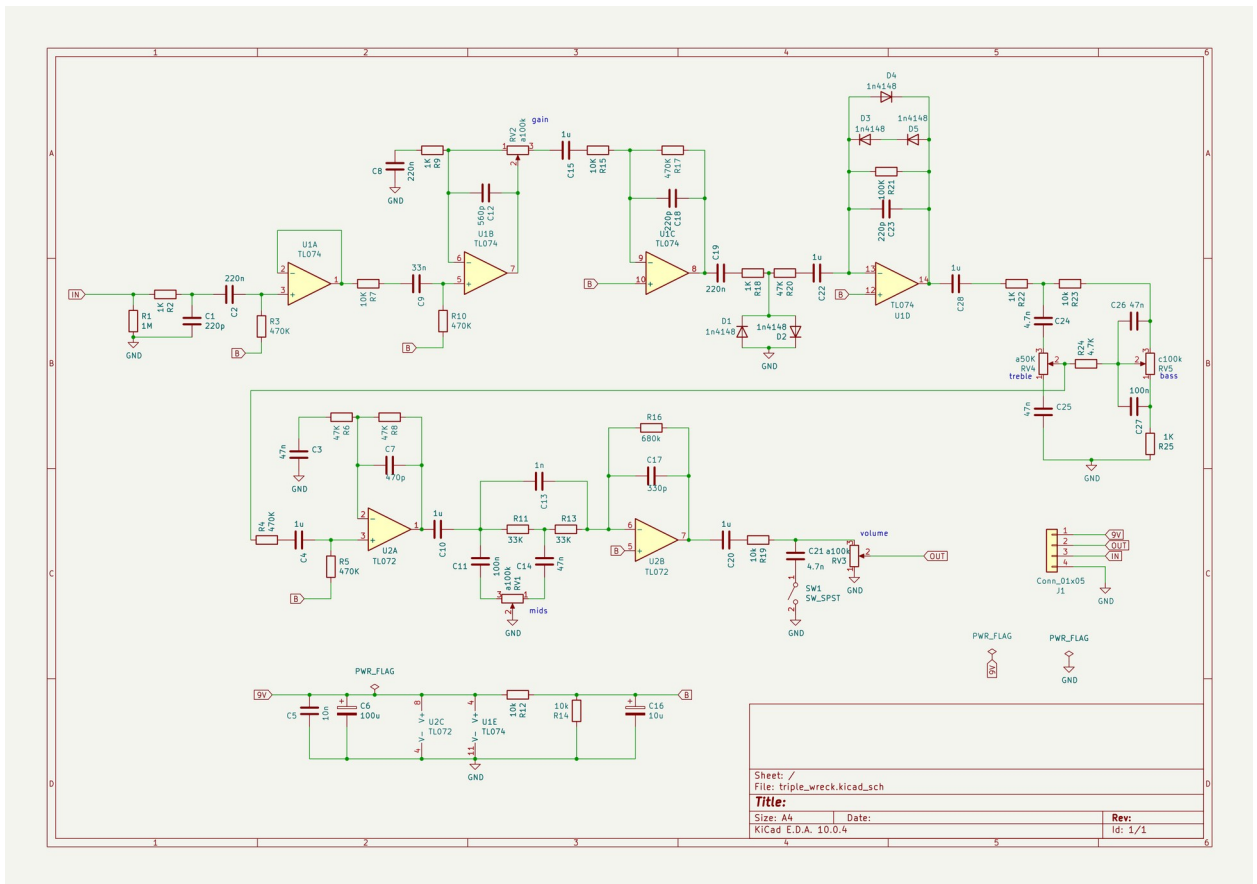

3. PCB F.Cu + Silkscreen

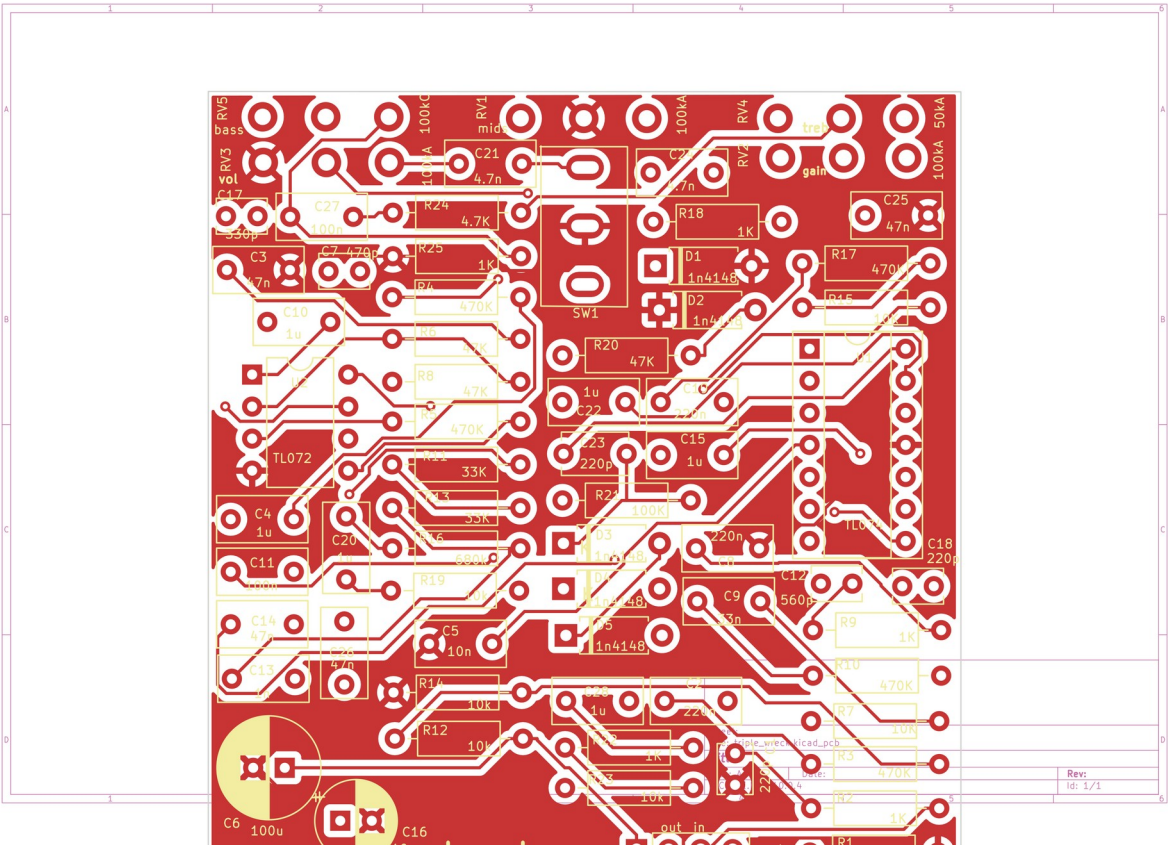

4. PCB B.CU + Silkscreen

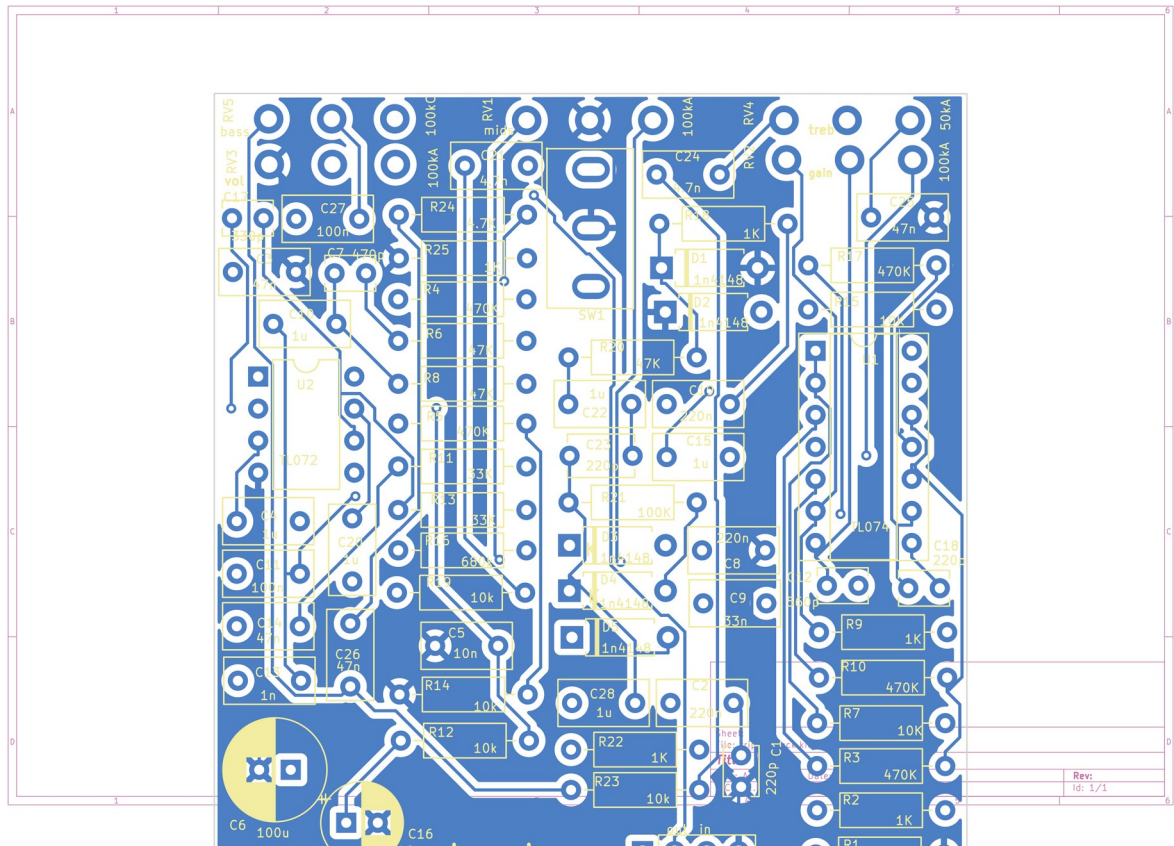

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1,C18	220p	Capacitor_THT :C_Disc_D3.8mm_W2.6mm_P2.50mm	2	
C2,C8,C19	220n	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	3	
C3,C14,C25,C26	47n	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	4	
C4,C10,C15,C20,C22,C28	1u	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	6	
C5	10n	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	1	
C6	100u	Capacitor_THT :CP_Radial_D8.0mm_P2.50mm	1	
C7	470p	Capacitor_THT :C_Disc_D3.8mm_W2.6mm_P2.50mm	1	
C9	33n	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	1	
C11,C27	100n	Capacitor_THT :C_Rect_L7.0mm_W3.5mm_P5.00mm	2	
C12	560p	Capacitor_THT :C_Disc_D3.8mm_W2.6mm_P	1	

		2.50mm		
C13	1n	Capacitor_THT: C_Rect_L7.0mm_W3.5mm_P5.00mm	1	
C16	10u	Capacitor_THT: CP_Radial_D6.3mm_P2.50mm	1	
C17	330p	Capacitor_THT: C_Disc_D3.8mm_W2.6mm_P2.50mm	1	
C21,C24	4.7n	Capacitor_THT: C_Rect_L7.0mm_W3.5mm_P5.00mm	2	
C23	220p	Capacitor_THT: C_Disc_D5.1mm_W3.2mm_P5.00mm	1	
D1-D5	1n4148	Diode_THT:D_A-405_P7.62mm_Horizontal	5	
J1	Conn_01x05	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
R1	1M	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P10.16mm_Horizontal	1	
R2,R9,R18,R22,R25	1K	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P10.16mm_Horizontal	5	

R3- R5,R10,R17	470K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	5	
R6,R8,R20	47K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	3	
R7,R15	10K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	2	
R11,R13	33K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	2	
R12,R14,R19, R23	10k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	4	
R16	680k	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
R21	100K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	

R24	4.7K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P10.1 6mm_Horizon tal	1	
RV1-RV3	a100k	pedals:Pot_Un derside	3	
RV4	a50K	pedals:Pot_Un derside	1	
RV5	c100k	pedals:Pot_Un derside	1	
SW1	SW_SPST	Switches:SWIT CH_SPDT_PTH _11.6X4.0MM_ LOCK	1	
U1	TL074	Package_DIP: DIP- 14_W7.62mm_ Socket	1	
U2	TL072	Package_DIP: DIP- 8_W7.62mm	1	

Total line items: 33