

acapulcogold

Project Report

1. Readme

Acapulco Gold Distorgion


This is a clone of the Earthquaker Devices acapulco gold distortion pedal.

It is base on a pair of LM386 op-amps, and provides a very crunchy distortion.


So this pedal is verified. I have not boxed this one yet, either.

All trademarks belong to their respective owners.


2. Schematic

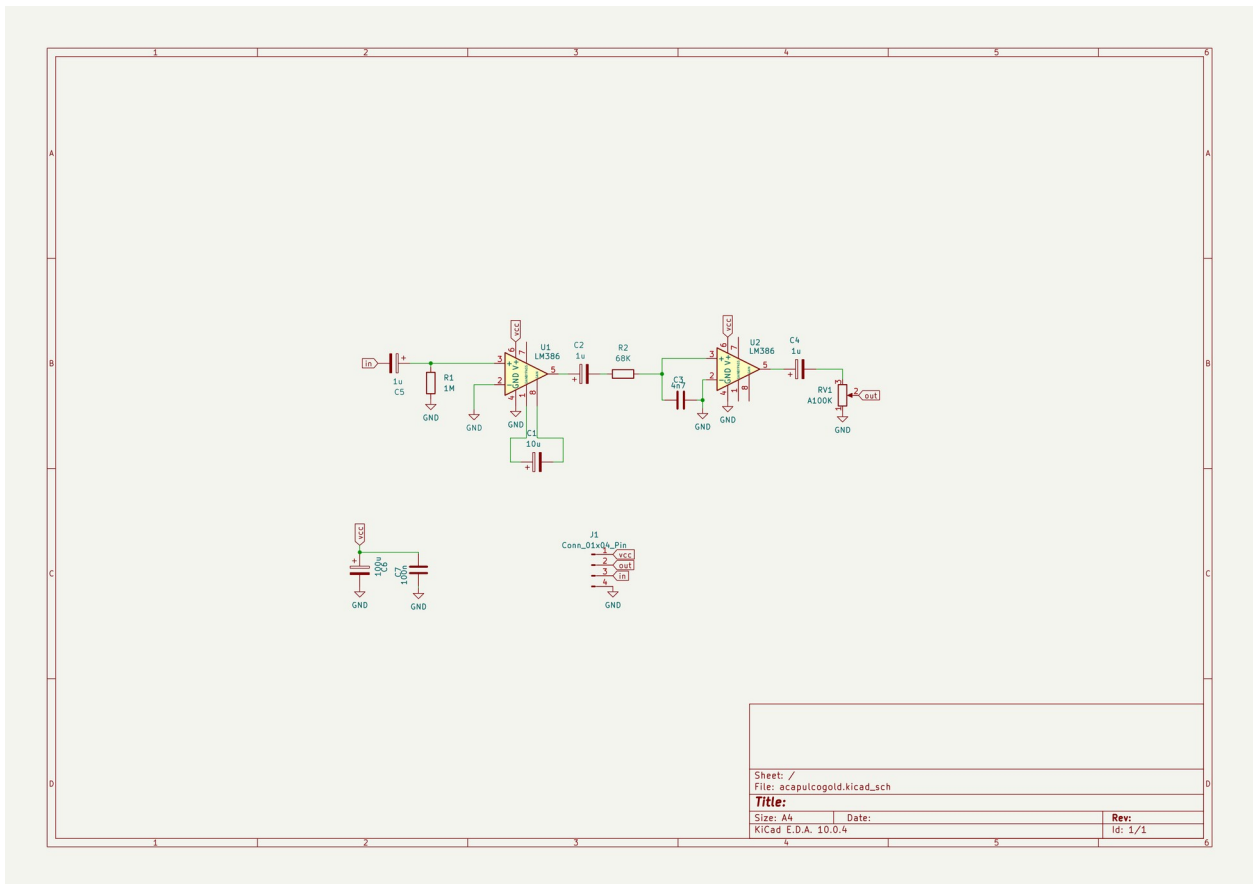

3. PCB F.Cu + Silkscreen

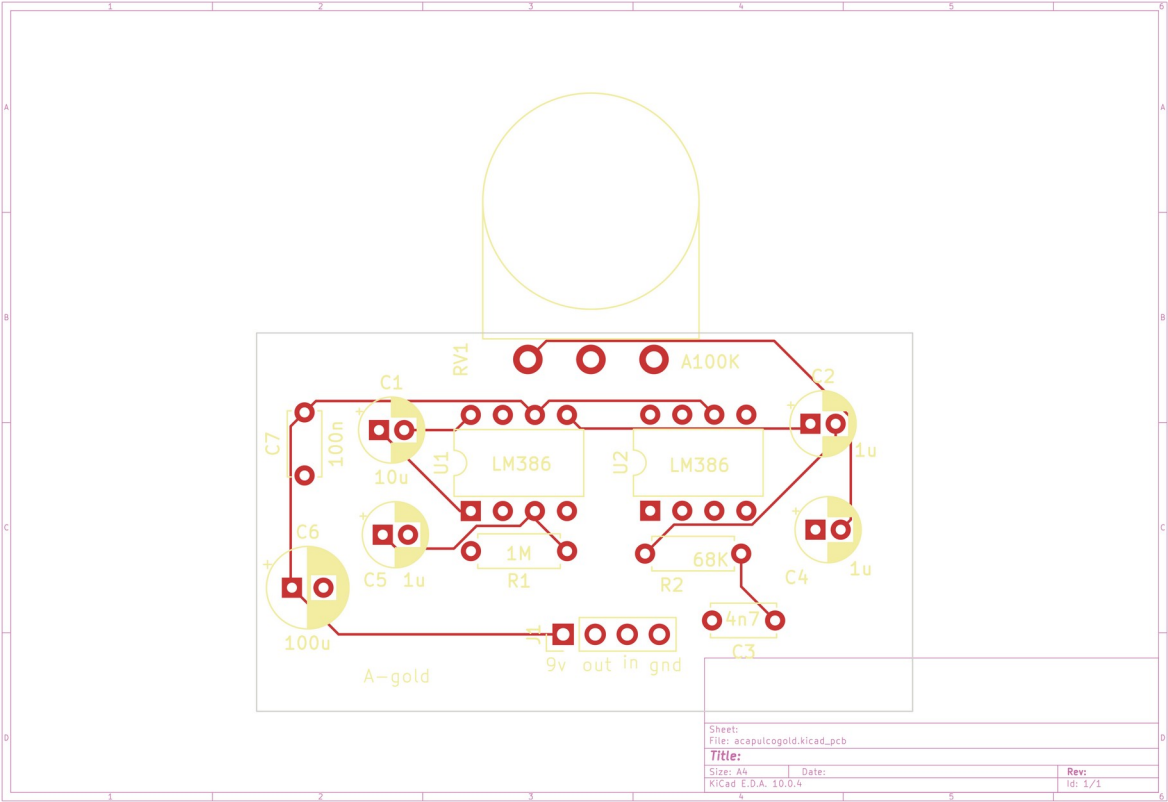

4. PCB B.CU + Silkscreen

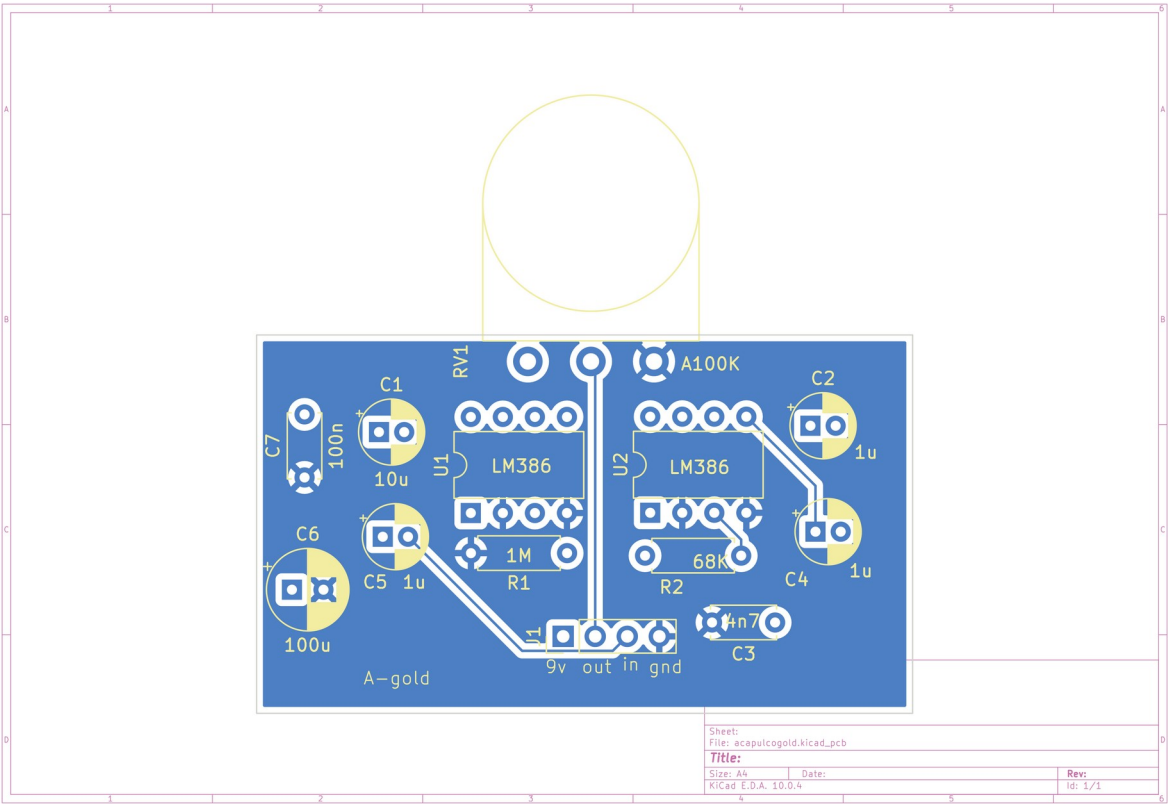

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1	10u	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	1	
C2,C4,C5	1u	Capacitor_THT: CP_Radial_D5.0mm_P2.00mm	3	
C3	4n7	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P5.00mm	1	
C6	100u	Capacitor_THT: CP_Radial_D6.3mm_P2.50mm	1	
C7	100n	Capacitor_THT: C_Disc_D5.0mm_W2.5mm_P5.00mm	1	
J1	Conn_01x04_Pin	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
R1	1M	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
R2	68K	Resistor_THT: R_Axial_DIN0207_L6.3mm_D2.5mm_P7.62mm_Horizontal	1	
RV1	A100K	Potentiometer_THT:Potentio	1	

		meter_Omeg_ PC16BU_Verti cal		
U1,U2	LM386	Package_DIP: DIP- 8_W7.62mm	2	

Total line items: 10