

ecstasy

Project Report

1. Readme


Ecstasy

This is a clone of the Wampler `ecstasy` overdrive.


So this pedal is verified. I have not boxed this one yet, either.

All trademarks belong to their respective owners.


2. Schematic

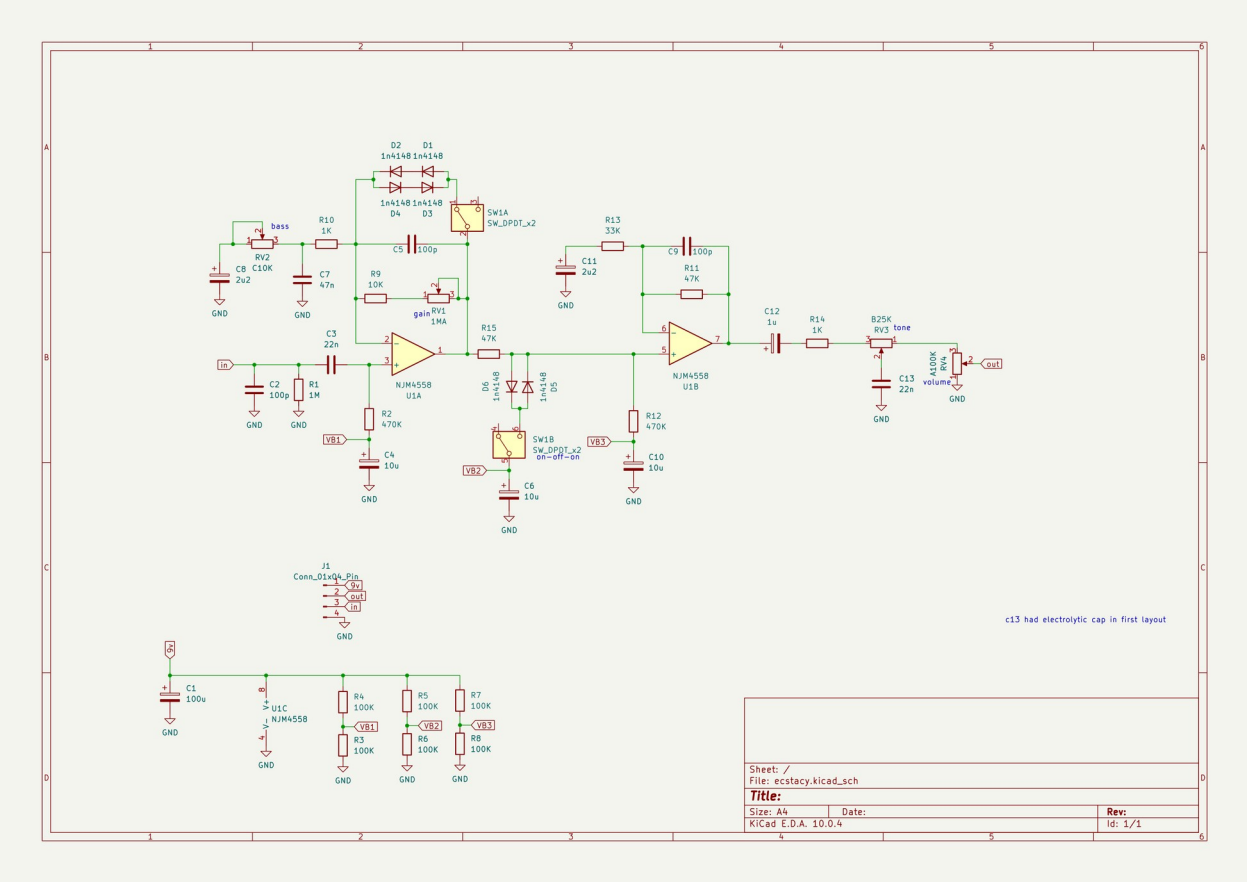

3. PCB F.Cu + Silkscreen

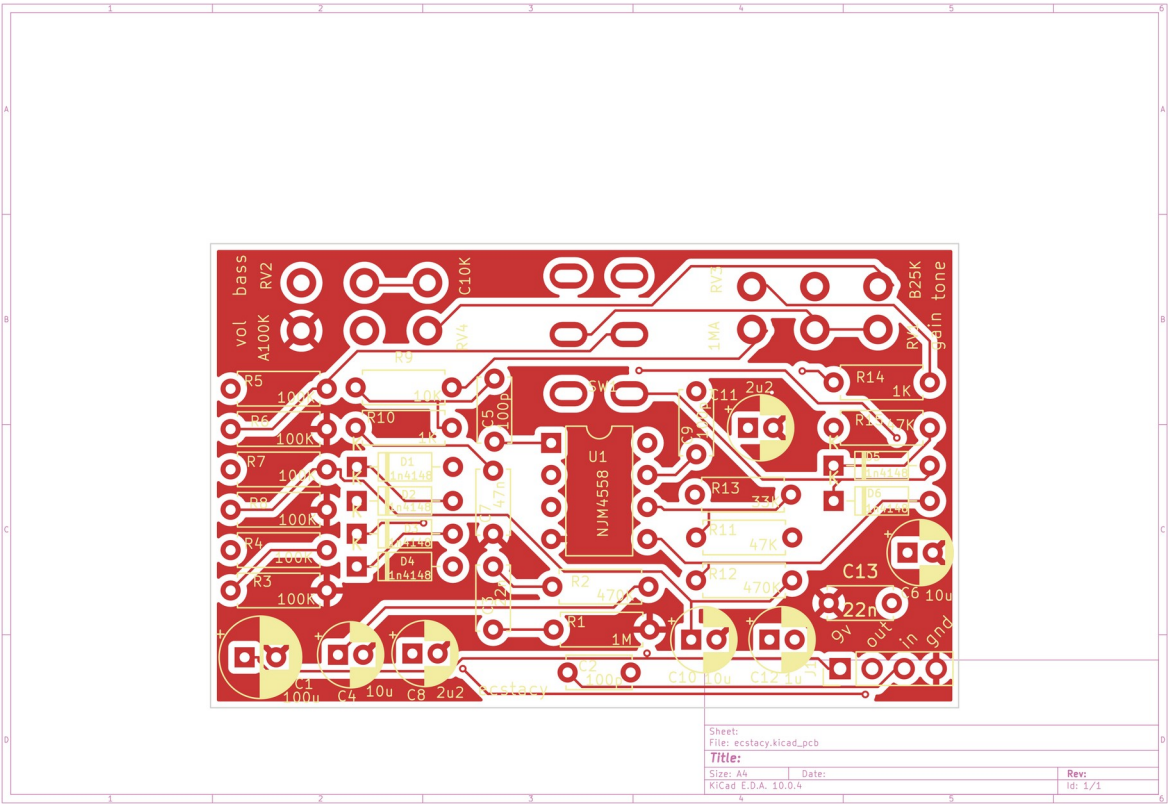

4. PCB B.CU + Silkscreen

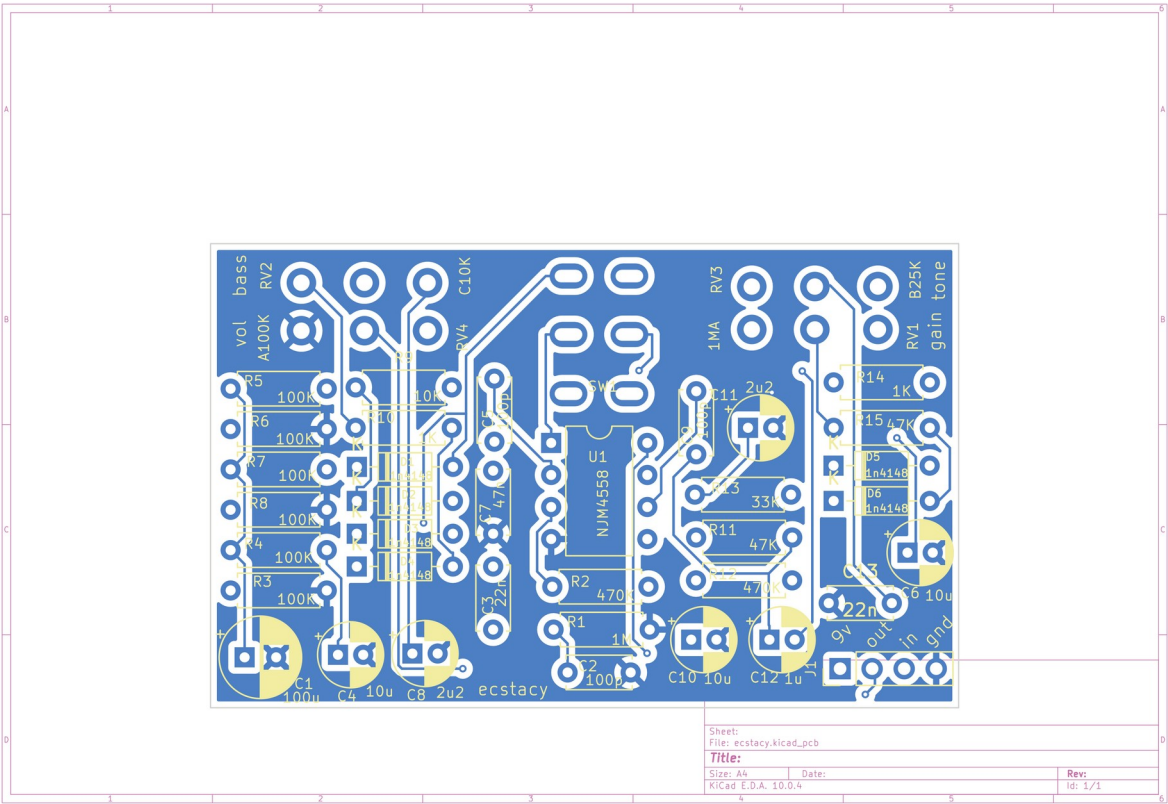

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
C1	100u	Capacitor_THT :CP_Radial_D6. 3mm_P2.50m m	1	
C2,C5,C9	100p	Capacitor_THT :C_Disc_D5.0m m_W2.5mm_P 5.00mm	3	
C3,C13	22n	Capacitor_THT :C_Disc_D5.0m m_W2.5mm_P 5.00mm	2	
C4,C6,C10	10u	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m m	3	
C7	47n	Capacitor_THT :C_Disc_D5.0m m_W2.5mm_P 5.00mm	1	
C8,C11	2u2	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m m	2	
C12	1u	Capacitor_THT :CP_Radial_D5. 0mm_P2.00m m	1	
D1-D6	1n4148	Diode_THT:D_ DO- 35_SOD27_P7. 62mm_Horizo ntal	6	
J1	Conn_01x04_P in	Connector_Pin Header_2.54m m:PinHeader_ 1x04_P2.54m m_Vertical	1	
R1	1M	Resistor_THT:	1	

		R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al		
R2,R12	470K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R3-R8	100K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	6	
R9	10K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
R10,R14	1K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R11,R15	47K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	2	
R13	33K	Resistor_THT: R_Axial_DIN02 07_L6.3mm_D 2.5mm_P7.62 mm_Horizont al	1	
RV1	1MA	pedals:Pot_Un	1	

		derside		
RV2	C10K	pedals:Pot_Un derside	1	
RV3	B25K	pedals:Pot_Un derside	1	
RV4	A100K	pedals:Pot_Un derside	1	
SW1	SW_DPDT_x2	pedals:SWITC H-M1-DPDT	1	
U1	NJM4558	Package_DIP: DIP- 8_W7.62mm	1	

Total line items: 22