top-jacks

Project Report


1. Readme


This is a pcb allowing the input, output and power jack to be mounted at the top of the enclosure, instead of having power at the top, and jacks mounted on the side. This simplifies the wiring. I put the diode on this as well so that all pedals get polarity protection. The jacks used from taydaelectronics:

6.35mm 1/4" Right Angle Mono Female Connector Thread Lock Panel Mount CK635008, SKU: A-6976


For this to work and have it above the 16mm pots, you have to drill it as close to the bottom of the enclosure as you can get.

An example of how it gets used:

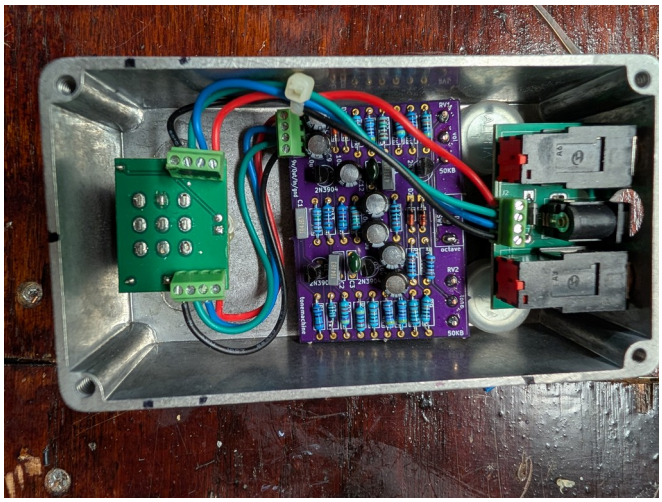


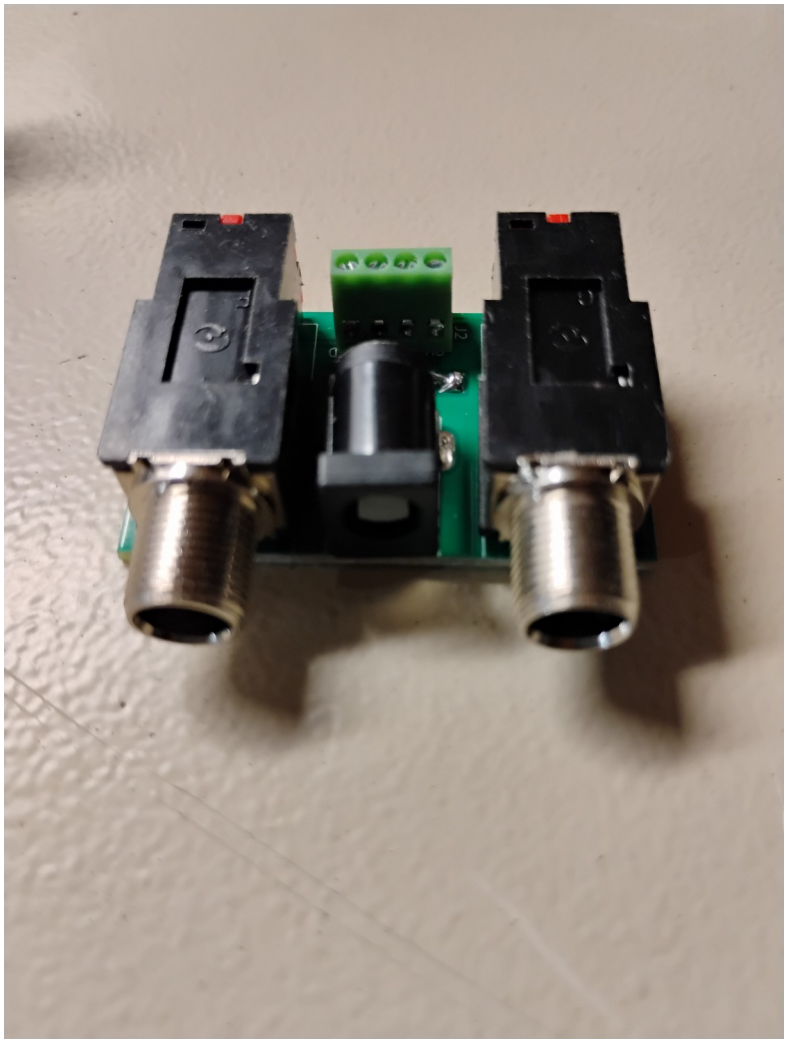


2. Schematic

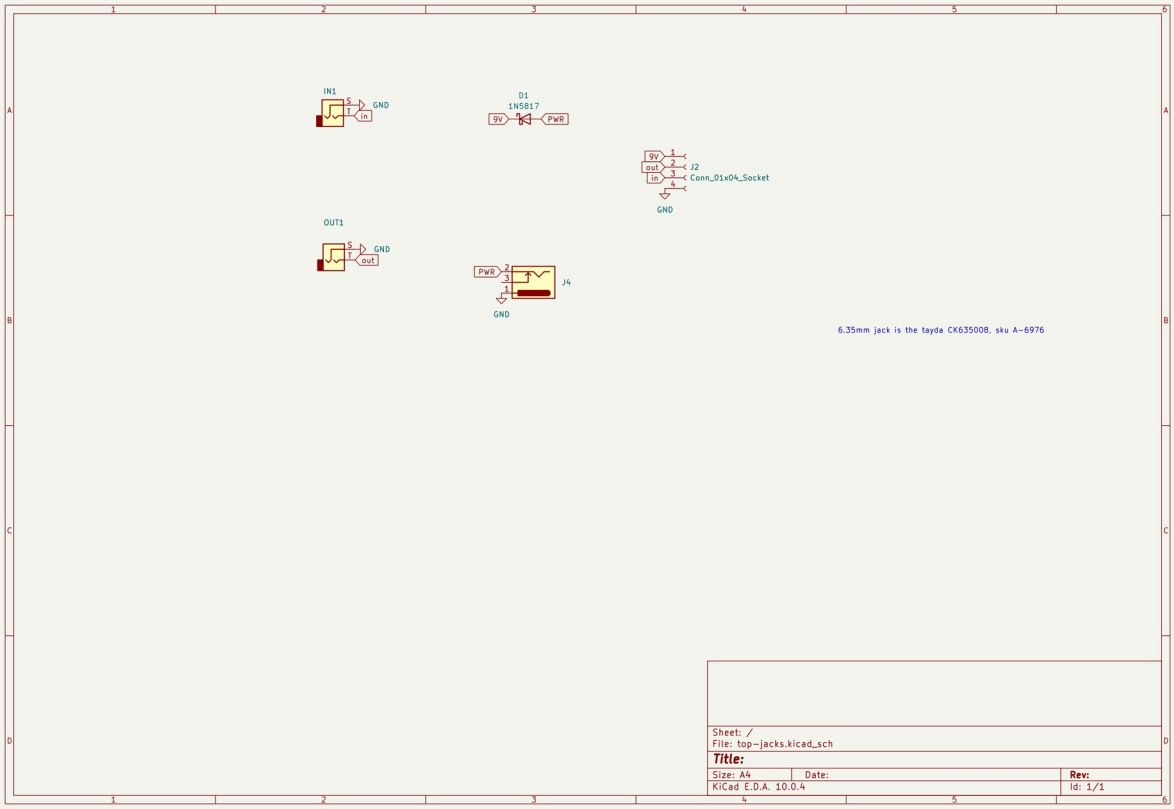
IN1
GND
D1
1N5817
9V
PWR
9V
out
in
J2
Conn_01x04_Socket
GND
OUT1
GND
out
PWR
J4
GND
6.35mm jack is the tayda CK635008, sku A-6976
Sheet: /
File: top-jacks.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.4
Id: 1/1

3. PCB F.Cu + Silkscreen

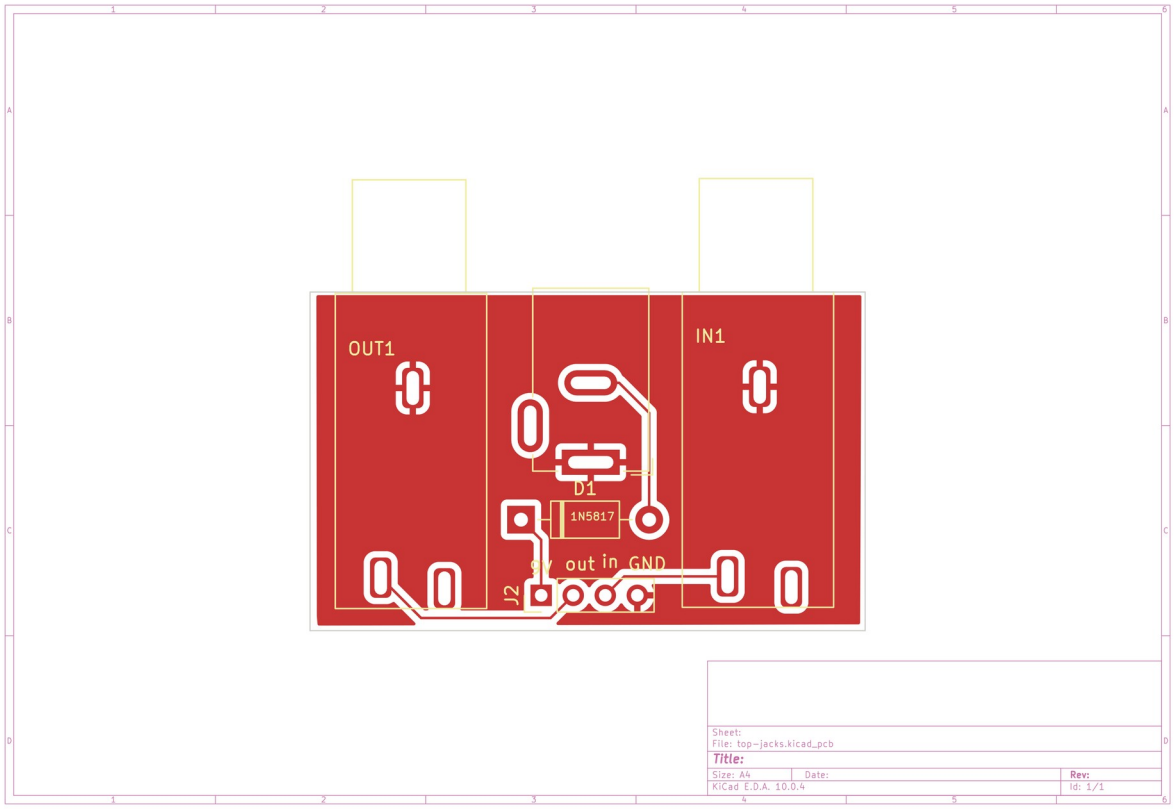

4. PCB B.CU + Silkscreen

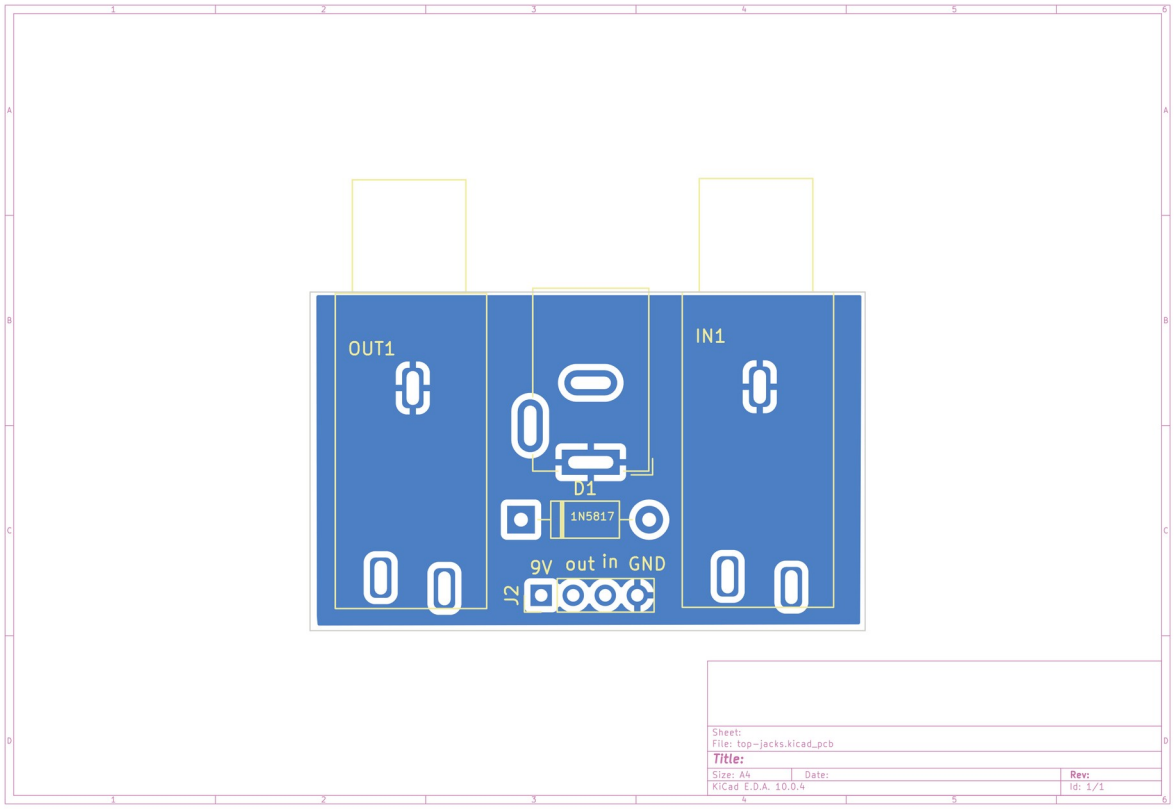

5. Bill of Materials

Reference	Value	Footprint	Qty	DNP
D1	1N5817	Diode_THT:D_DO-41_SOD81_P10.16mm_Horizontal	1	
IN1,OUT1	AudioJack3_dual_switch	pedals:6.35mm-audio-jack	2	
J2	Conn_01x04_Socket	Connector_PinHeader_2.54mm:PinHeader_1x04_P2.54mm_Vertical	1	
J4	Barrel_Jack_Switch	Connector_BarrelJack:BarrelJack_GCT_DCJ200-10-A_Horizontal	1	

Total line items: 4