

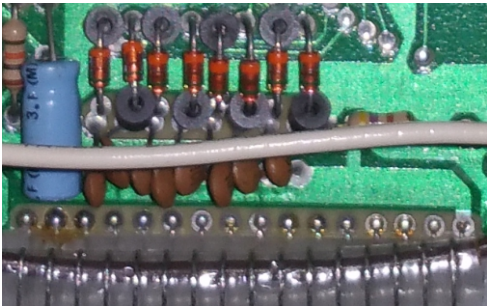


VZ200 Keyboard Wiring

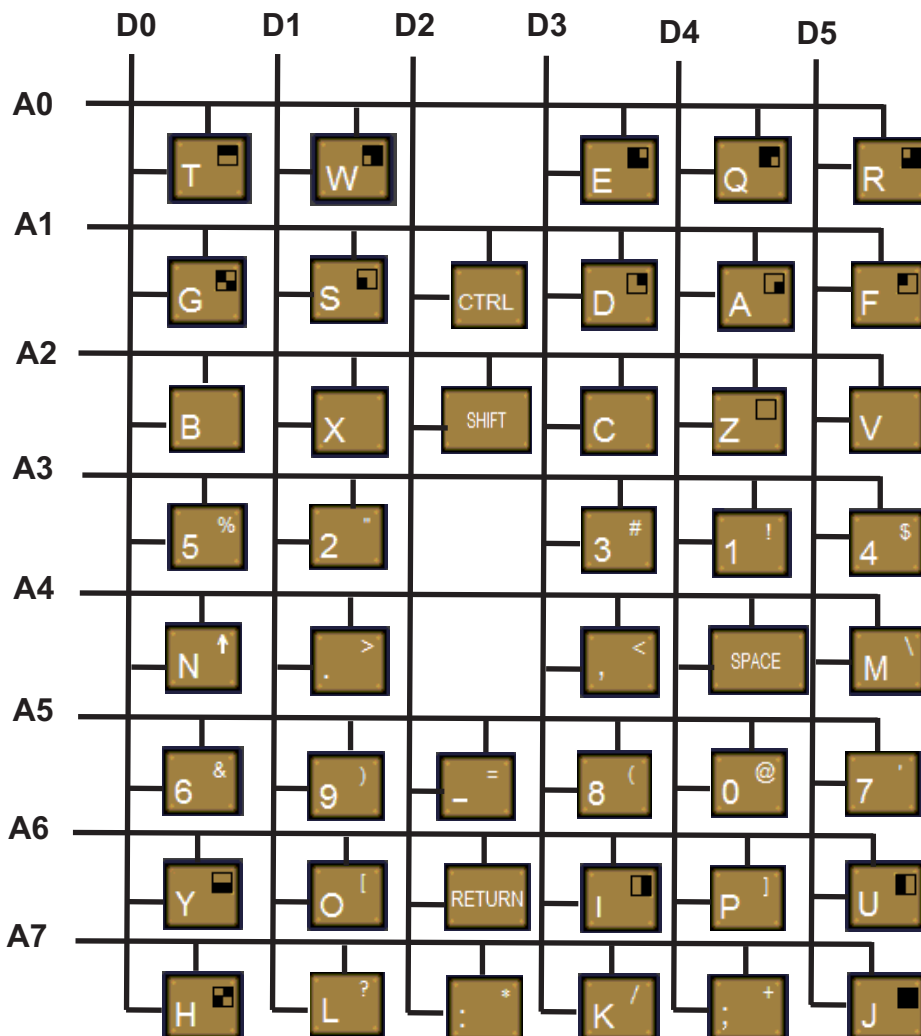

A2 A1 A0 A3 A4 A7 A6 A5 D0 D5 D3 D1 D4 D2 LED GND

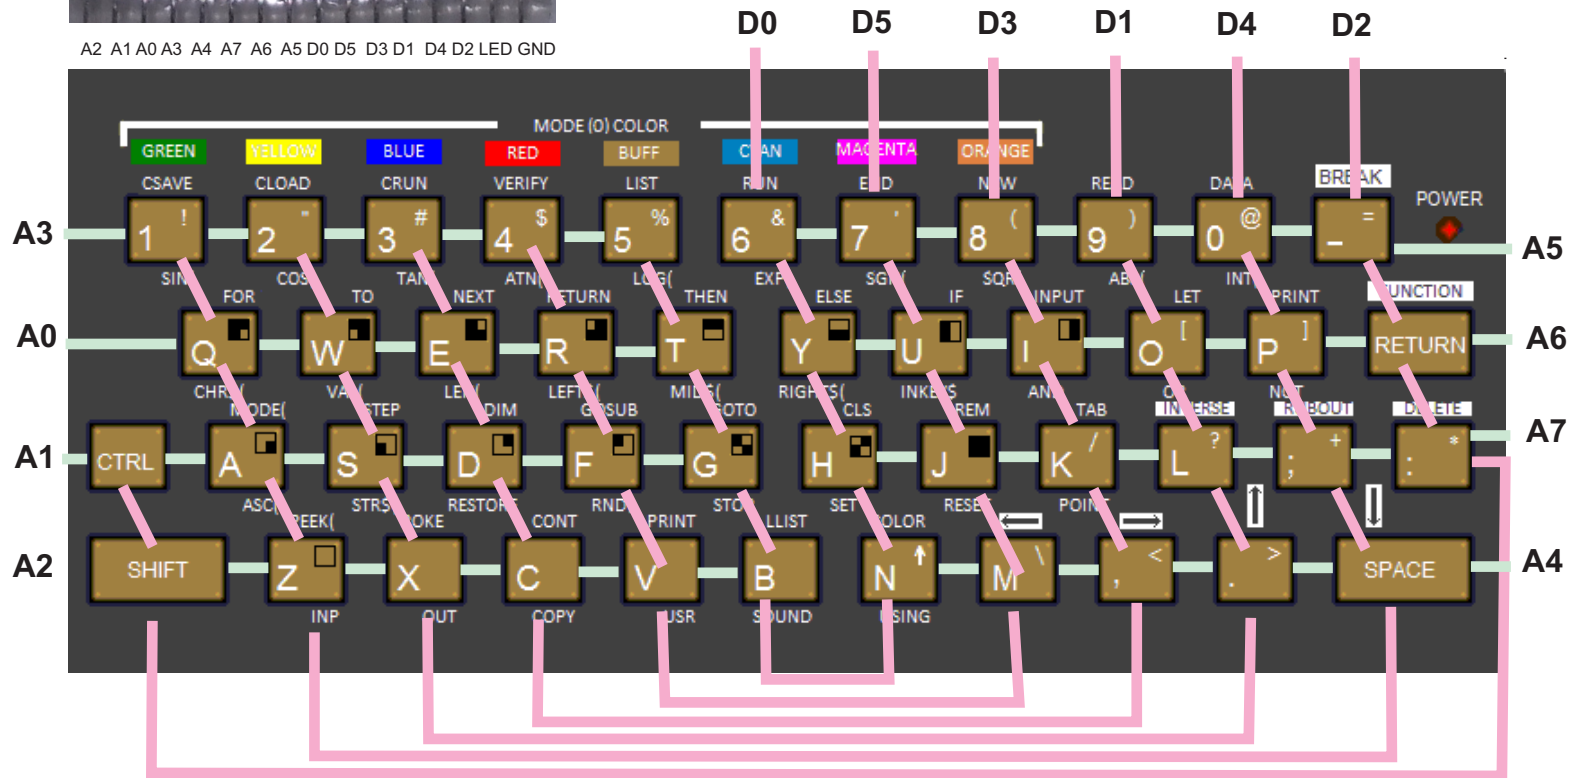

The keyboard is scanned by the software taking each of the eight address lines down to logic low level in turn. If a key is pressed, it effectively "pulls down" the bit line at the address for its row. For example if the "2" key is pressed, this causes bit 1 to drop to 0 at address 68F7 (also 69F7, 6AF7, 6BF7, 6CF7, 6DF7, 6EF7 and 6FF7). Providing no other keys are pressed in that row, the data retrieved by reading that address will be 3D hex (binary 111101).