





Battery: CR2032 in Keystone 3034 SMT holder (VDD 1.8–3.6 V, no regulator).
MCU runs straight off the cell; the LED has its own reservoir (C4–C6)
refilled through R8, so LED pulses sag VLED, not VDD.
Reservoir must be ceramic: polymer/electrolytic leakage >> 0.4 uA standby.
R7 sets LED peak current: (VLED − 1.35 V) / R7 ~ 110 mA at 3 V.



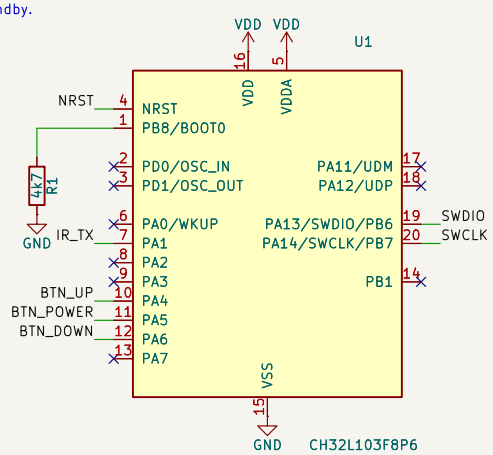



Buttons wake the MCU from standby via EXTI.
External pull-ups: GPIO config isn't held in standby.

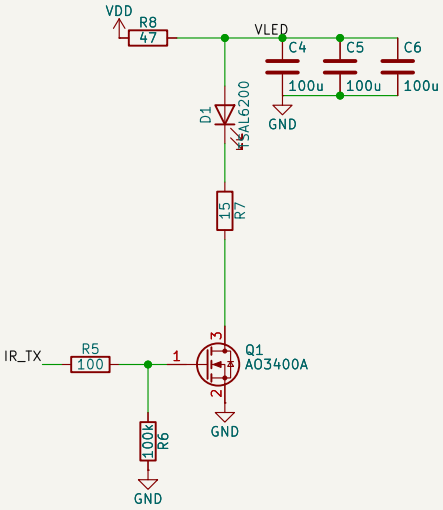

PA1 = TIM1_CH1 (remap 010): 38 kHz carrier.
R6 holds Q1 off while PA1 floats in standby.

Sheet: / File: turbo_fan_remote.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1