

# Digital Constant

## 1.0

## Features



- Represents a digital value clearly on a schematic
- Display in hexadecimal or decimal
- Configurable width up to 32 bits

## General Description

The Digital Constant provides a convenient way to represent digital values in designs.

## When to Use a Digital Constant

Use the Digital Constant whenever a constant digital value is needed in a design. Common use cases include bit-masks and magnitude comparisons.

## Input/Output Connections


This section describes the various input and output connections for the Digital Constant.

### val – Output

The specified value.

## Component Parameters

Drag a Digital Constant onto your design and double-click it to open the **Configure** dialog.

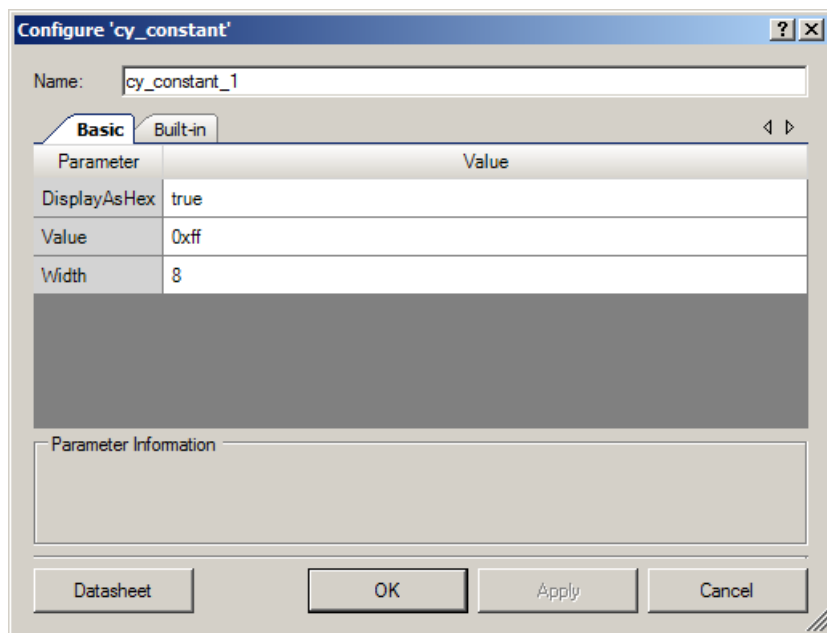

The Digital Constant provides the following parameters.

### DisplayAsHex

Determines whether the component symbol displays the value as hexadecimal (**true**) or decimal (**false**). The default is **true**.

### Value

Determines the value represented by the component, which must be between 0 and  $2^{\text{Width}}$ . The default is **0xff**.

### Width

Determines the width of the **val** terminal. Width must be between 1 and 32. The default is **8**.

## Functional Description

The Digital Constant assigns the specified value to all of the **val** terminal's connections.

## Resources

All Digital Constants in your design combined may consume up to two macrocells. They will consume a single macrocell to represent logic "1" if any bits of the constants include a "1" bit. Another single macrocell is used to represent logic "0" in the same manner. However in many cases, the constant value can be optimized away. This is possible when PSoC Creator can configure the function such that it operates in the same way as it would with a routed constant value. Therefore, it is possible to use the Digital Constant without consuming any resources.

## MISRA Compliance

This section describes the MISRA-C:2004 compliance and deviations for the component. There are two types of deviations defined: project deviations – deviations that are applicable for all PSoC Creator components and specific deviations – deviations that are applicable only for this component. This section provides information on component specific deviations. The project deviations are described in the MISRA Compliance section of the *System Reference Guide* along with information on the MISRA compliance verification environment.

The Digital Constant component does not have any C source code APIs.

## DC and AC Electrical Characteristics

The Digital Constant component supports the maximum device frequency.

## Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.0 b	Updated resources information.	
1.0.a	Corrected a parameter description.	Previous version of datasheet contained a typo.
1.0	First version of this component.	

© Cypress Semiconductor Corporation, 2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® Creator™, Programmable System-on-Chip™, and PSoC Express™ are trademarks and PSoC® is a registered trademark of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

