



I2C1: SDA = GP26, SCL = GP27 (Wire1). Button = GP22. Potentiometer = GP28 (ADC2).
Firmware: build with FRUTAMIDI_PCB defined (see firmware/).

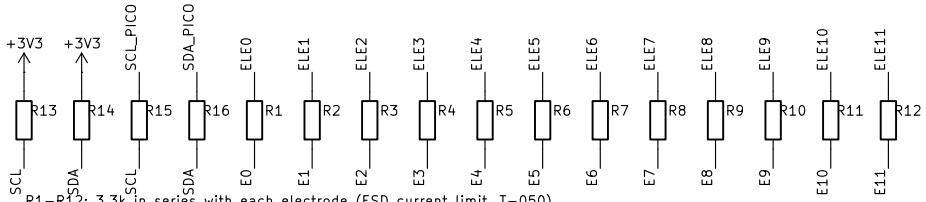



R1–R12: 3.3k in series with each electrode (ESD current limit, T-050).
R13/R14: 4.7k I2C pull-ups to 3V3 on the bus side (rise time at 400 kHz, T-050).
R15/R16: 220R between the Pico I2C pins and the bus (wrong-wire current limit, T-055).

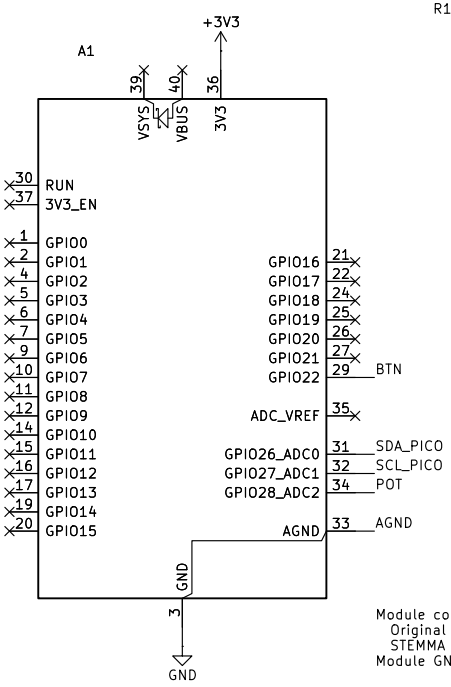







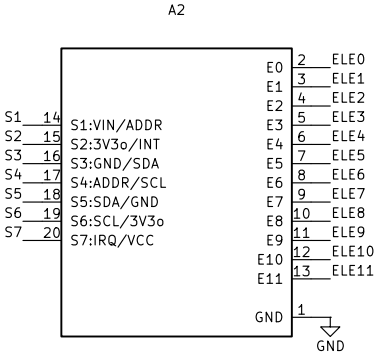


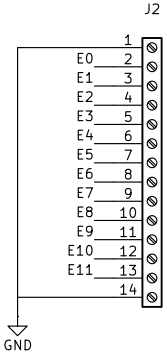



Module configuration (component side):
  Original module (no STEMMA QT): JP1 bridge 'ORIG' (3V3 -> S1)   wires SDA -> S5   SCL -> S6
  STEMMA QT module (current):   JP1 bridge 'QT'   (3V3 -> S7)   wires SDA -> S3   SCL -> S4
Module GND enters through the electrode row (pin 1), the same on both revisions.














H1 H2 H3 H4

Raspberry Pi Pico + Adafruit MPR121 (1982), single-sided PCB
github.com/catuta0/fruta-midi-controller
Sheet: /
File: frutamidi.kicad_sch

Title: FrutaMIDI — capacitive MIDI controller

Size: A4	Date: 2026-10-30	**Rev: 1.1**
KiCad E.D.A. 10.0.4		Id: 1/1