




RealAcoustix

RealQuad Studio800

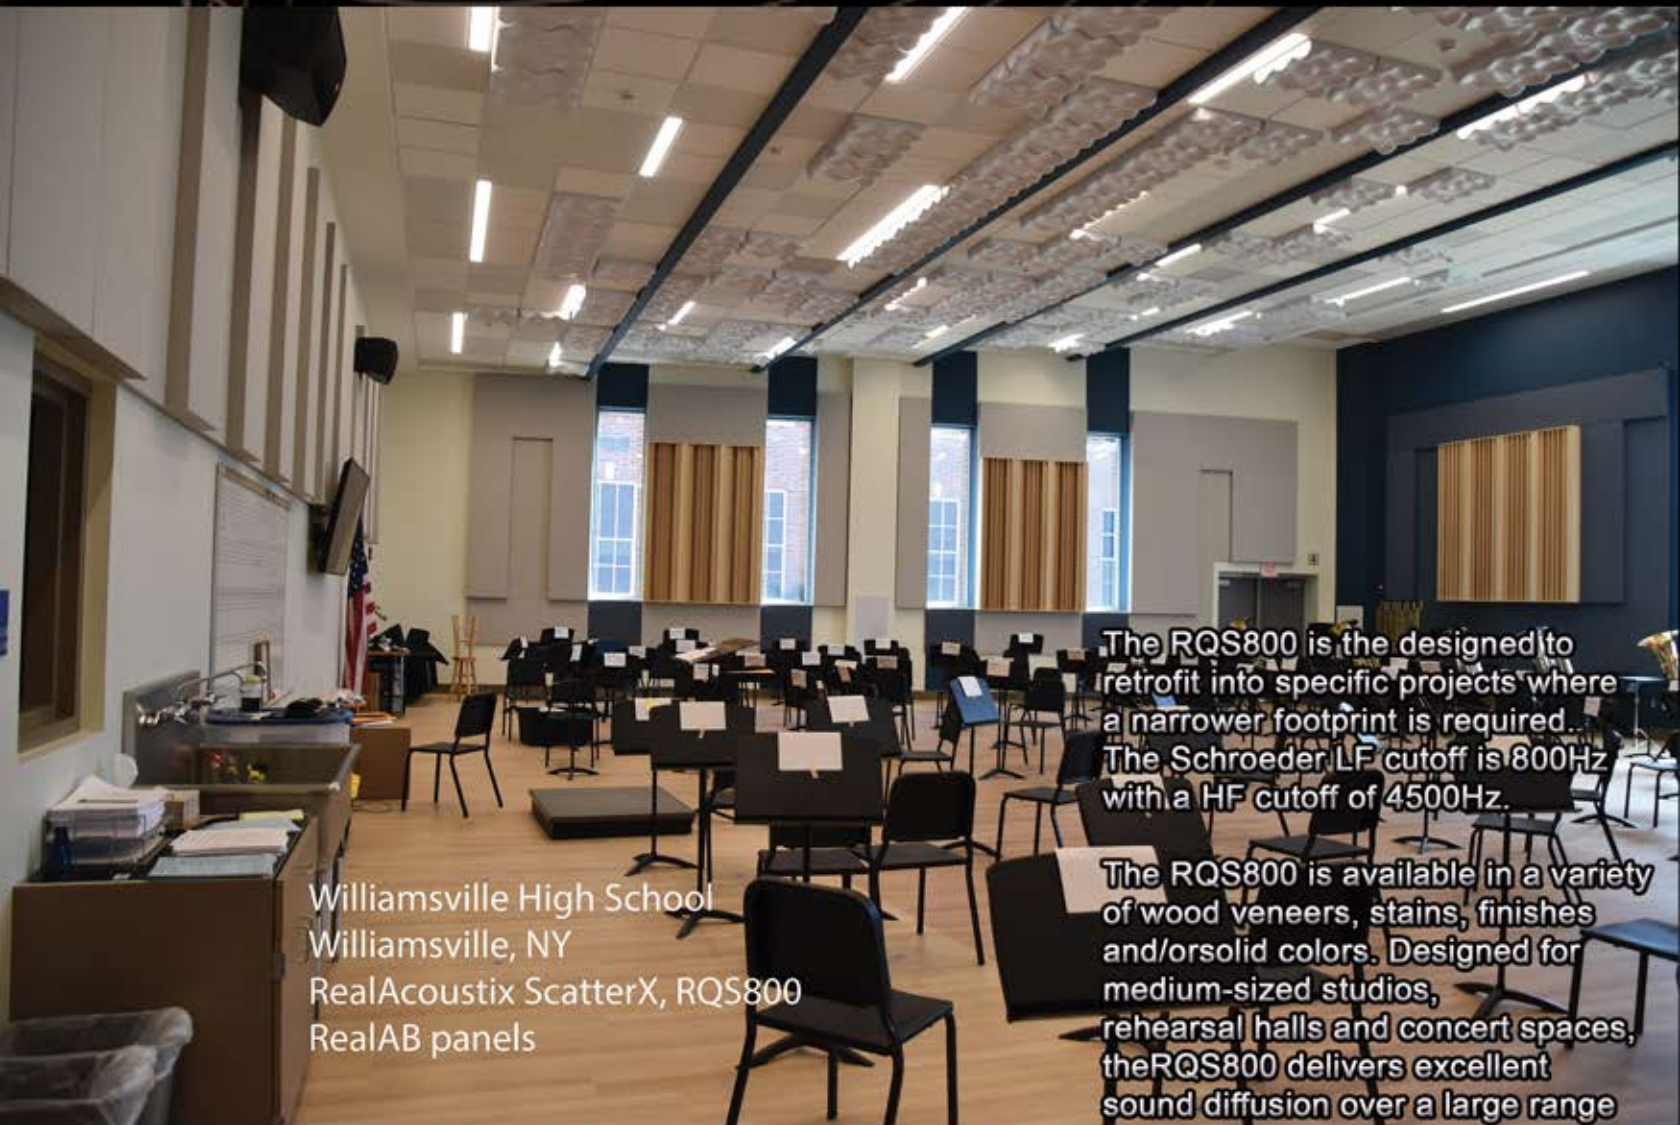

Williamsville High School
Williamsville, NY
RealAcoustix ScatterX, RQS800
RealAB panels

The RQS800 is designed to retrofit into specific projects where a narrower footprint is required. The Schroeder LF cutoff is 800Hz with a HF cutoff of 4500Hz.

The RQS800 is available in a variety of wood veneers, stains, finishes and/or solid colors. Designed for medium-sized studios, rehearsal halls and concert spaces, the RQS800 delivers excellent sound diffusion over a large range

Specifications:

Model: RealQuad Studio800

Size: Standard width: 18" Depth: 4.625"

Standard heights: 23 5/8", 47 1/4"
60" or 72"

Standard Depth: 4.625"

Operating range: 800Hz - +4.5KHz

Construction: MDF core with veneer
Clear, stained or color finishes