



Engineering Note

Title:	RBX-PCB-EX02-C1 to C2 Extruder PCB mod sheet		
Project:	CEL Robox	No.	RBX-PCB-EX02-C1
Engineer:	Pete Tarver	Date:	09/11/2021
Pages:	5		

Introduction

During testing of the rev C1 assembly the following changes have been found necessary for a more robust, noise filtering, solution:


1. 10K resistor fitted between 3V3 and GND_SWITCH
2. SN74LVC1G17DBVR schmitt buffer added between the optical sensor output and the connector

Parts required


1. Procure:
 - a. ERJ3EKF1003V x 1 (or similar 10K resistor)
 - b. SN74LVC1G17DBVR x 1
 - c. 06033C104KAT2A x 1 (or similar 100nF capacitor)

Implementing modifications

1. Add resistor: directly solder to R1 pin 1, and wire link the other end to J3 pin 9:

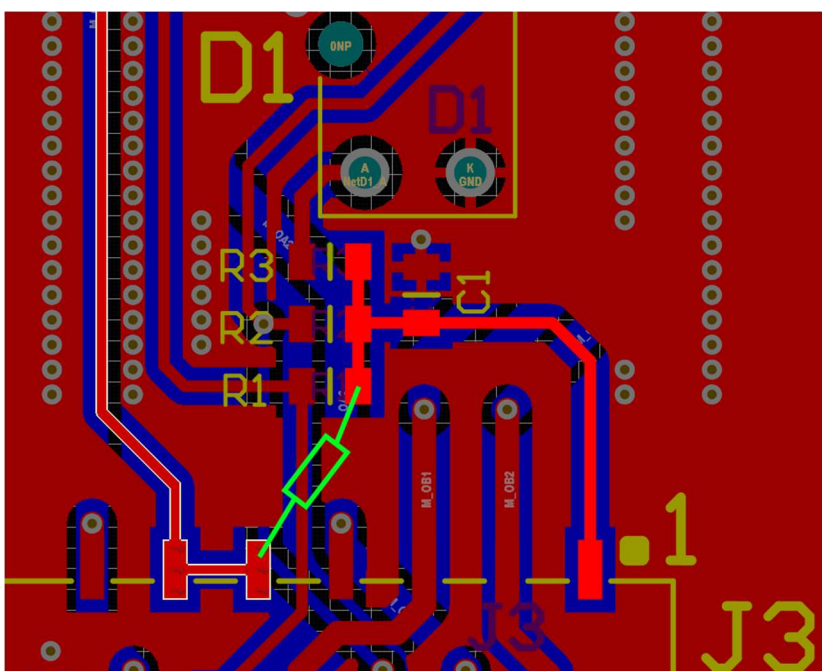

2. Add SN74LVC1G17DBVR and decoupling cap:

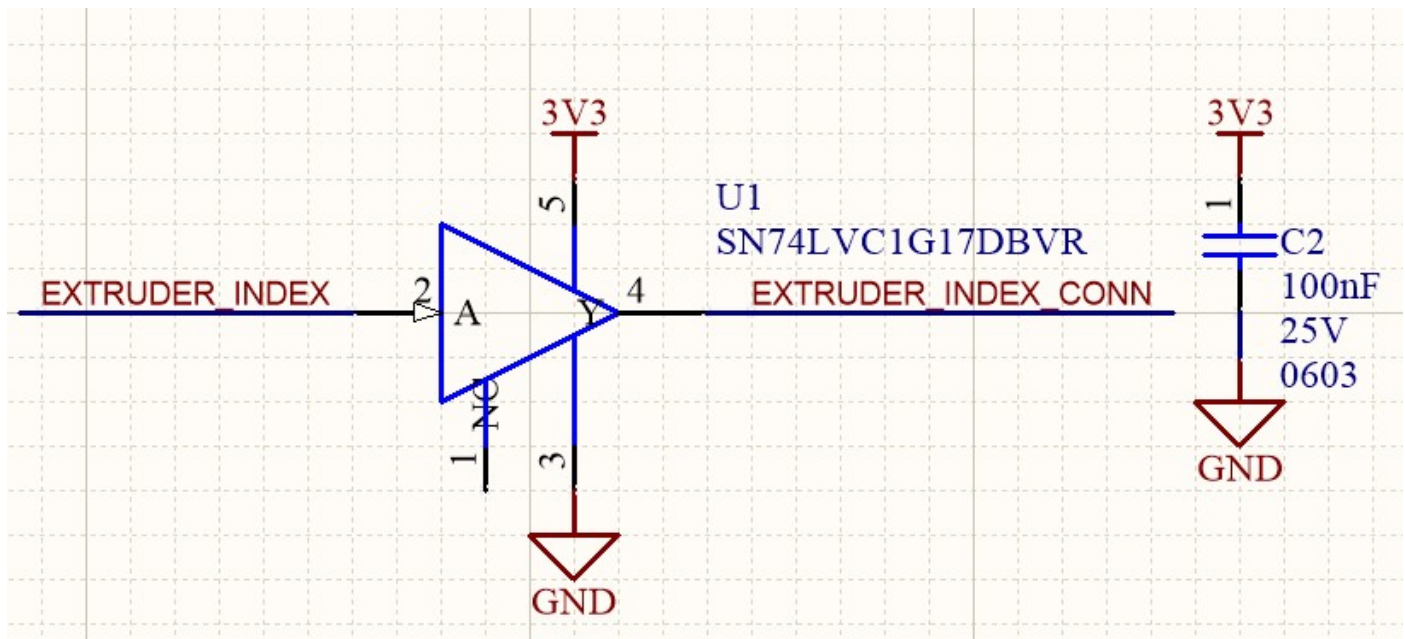

- Cut track on underside of board
- Fit SN74LVC1G17DBVR upside down next to R2 (note pin 1 is not connected), wire link as shown below. Ideally add decoupling cap across the device directly between pins 3 and 5, but C1 already in place will do the job adequately.

