


BRANCHING

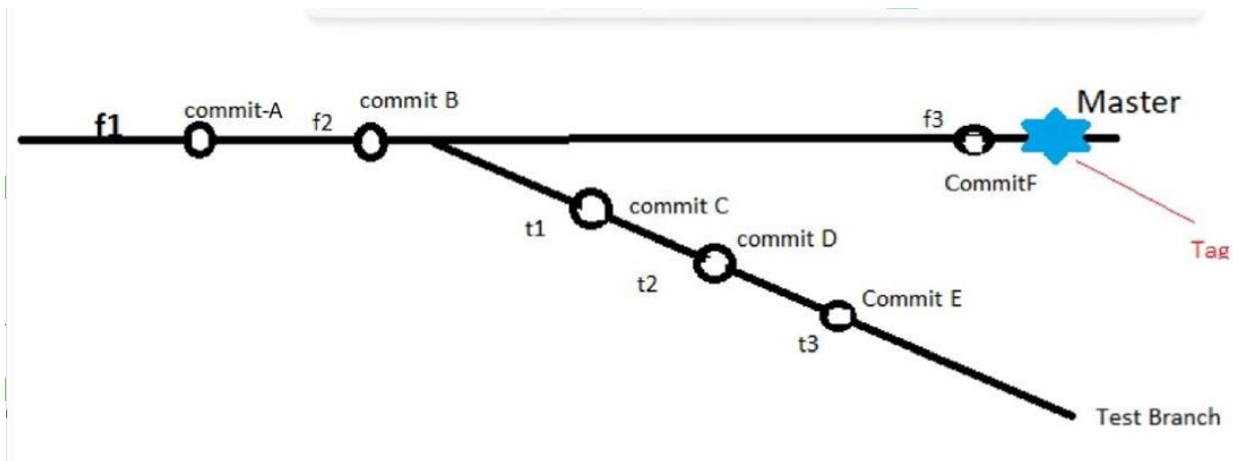

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git status
```

```
On branch master
```

```
No commits yet
```

```
Untracked files:
```

```
(use "git add <file>..." to include in what will be  
committed)
```

```
nothing added to commit but untracked files present  
(use "git add" to track)
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master) $  
git add .
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git commit -m "Commit -- A"
```

```
[master (root-commit) dd3c51a] Commit -- A
```

```
Committer: Bharath Gowda R  
<bharathgowda.r@outlook.com>
```

```
1 file changed, 0 insertions(+), 0 deletions(-)  
create mode 100644 f1
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ touch f2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git add f2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git commit -m "Commit -- B"
```

```
[master 89e0985] Commit -- B
```

```
Committer: Bharath Gowda R
```

```
<bharathgowda.r@outlook.com>
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
```

```
create mode 100644 f2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$
```

Note:

Assume we have got new functionality to work on, to start working on that, lets create a new branch (name: testbranch) & start working on that branch parallelly

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git branch testbranch
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git branch *
```

```
master
```

```
testbranch
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
```

```
$ git checkout testbranch
```

```
Switched to branch 'testbranch'
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
```

```
$ ls f1
```

```
f2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
```

```
$ touch t1
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git add t1
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git commit -m "Commit -- C"
[testbranch a4b2246] Commit -- C
Committer: Bharath Gowda R
<bharathgowda.r@outlook.com>
```

```
git commit --amend --reset-author
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 t1
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ touch t2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git add t2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git commit -m "Commit -- D"
[testbranch 367926c] Commit -- D
Committer: Bharath Gowda R
<bharathgowda.r@outlook.com>
```

```
git commit --amend --reset-author
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 t2
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ touch t3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch) $
git add t3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git commit -m "Commit -- E"
[testbranch 2b9adf7] Commit -- E
Committer: Bharath Gowda R
```

```
<bharathgowda.r@outlook.com>
```

```
git commit --amend --reset-author
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 t3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$
```

Note:

Now If our work in test branch is completed we can switch back to master branch & proceed working there

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git branch
master *
testbranch
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (testbranch)
$ git checkout master
Switched to branch 'master'
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git branch *
master
testbranch
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ ls f1
f2
```

Note:

files (t1 t2 t3) & commits created on testbranch will not be visible in master branch until we merge testbranch with master

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git log --oneline
89e0985 (HEAD -> master) Commit -- B dd3c51a
Commit -- A
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ touch f3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git add f3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git commit -m "Commit -- F"
[master 5c4c68e] Commit -- F
Committer: Bharath Gowda R
<bharathgowda.r@outlook.com>
```

```
git commit --amend --reset-author
```

```
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 f3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git log --oneline
5c4c68e (HEAD -> master) Commit -- F
89e0985 Commit -- B dd3c51a
Commit -- A
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$
```

Now since work on testbranch has completed, lets merge testbranch changes to master branch

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git merge testbranch
Merge made by the 'ort' strategy.
t1 | 0   t2 | 0
t3 | 0
```

```
3 files changed, 0 insertions(+), 0 deletions(-)
create mode 100644 t1  create mode 100644 t2
create mode 100644 t3
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master)
$ git log --oneline
1aaa669 (HEAD -> master) This is coming from my merge
commit Merge branch 'testbranch'
5c4c68e Commit -- F
2b9adf7 (testbranch) Commit -- E
367926c Commit -- D a4b2246
Commit -- C 89e0985 Commit
-- B dd3c51a Commit -- A
```

```
MyPC@Bharath MINGW64 ~/Desktop/Project1 (master) $
```

Observations:

Commits in master

i. Before merging testbranch:

Commit A , Commit B, Commit F

ii. After merging

testbranch:

Commit A, Commit B Commit C Commit D,Commit
E, Commit F