

# TERMO DE ACEITE TÉCNICO

**Solicitante:** VIVO

**NOC/Operador:** Alexandre Cruz

**Cliente:** VIVO


**Empresa**  
EMC Brasil

**VSAT-ID**

**VIVO-PER-**  
**31135968**  
**MG**

**Link kbps**

**Plataforma VSAT**

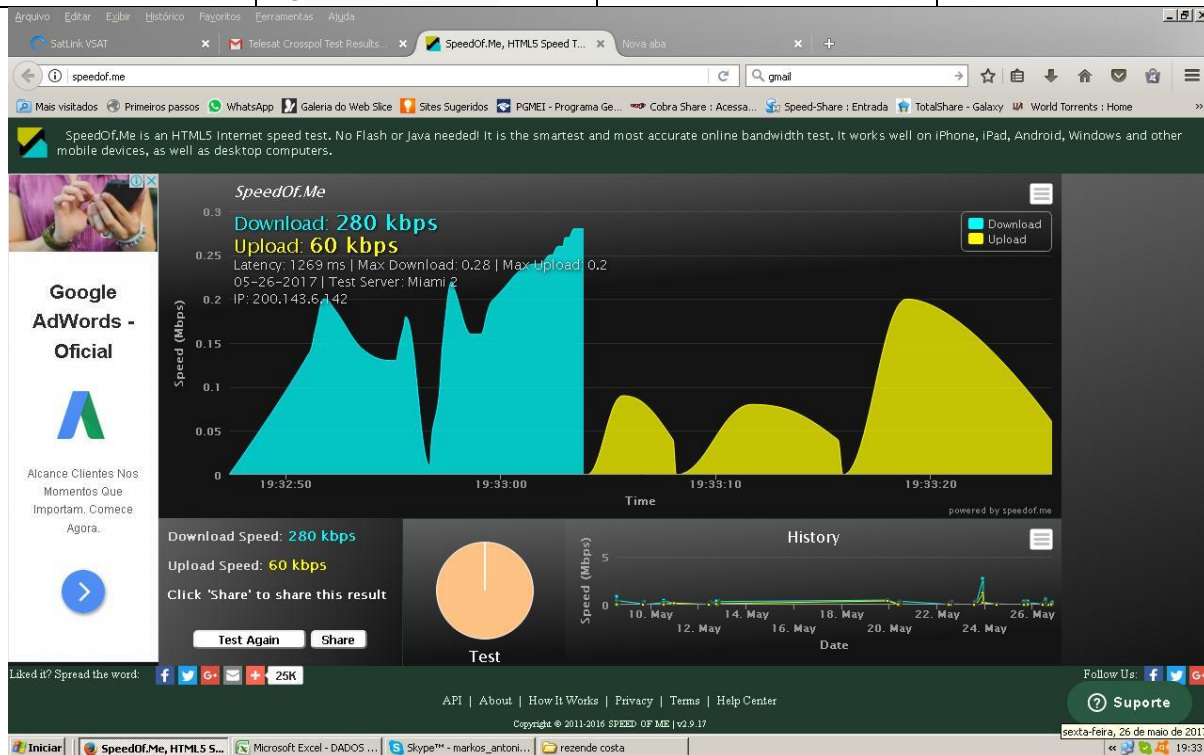

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT x SpeedOf.Me, HTML5 Speed T... x +

10.29.38.249/vmi/dwp/index\_page.dwp Pesquisar

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

# STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:60:8a
DVB MAC Address	00:20:0e:10:60:8a
System Up Time	0 days, 00:23:48
CPU Load	13%
System Name	VIVO-PER-31135968-MG
System Contact	
System Location	REZENDE COSTA - MG
ODU Serial Number	104804040203090404140000
ODU HW Version	4.2

**Satellite <DUB> Transmitter Status**

State : On <DUB-RCS2>  
IDU Output Power : -18.9 dBm  
ODU Output Power : 32.6 dBm  
EIRP : 45.9 dBW  
Es/No : 14.0 dB  
Header Compression : Disabled  
Timing correction : -38 us <255483 us>  
Frequency correction : -20 Hz

**Satellite <DUB> RX Configuration**

Auto\_start : Enabled  
Max Traffic : 23 16APSK-9/10  
RX watchdog : 15 minute

Idx	Pri	SymbRate [Mbps]	Freq [GHz]	Mode	PopId	SatId	Pos	SatName
* 0	0	15.000000	12.059000	DVB-S2 102	0	0.0	E	
1	1	9.320000	12.055025	DVB-S2 4	0	0.0	E	

**Satellite <DUB> Receiver Status**

Rx State : On  
DUB State : Forward Link up  
Network : 1326 114R Beam  
Frequency : 12.059142 GHz  
Symbol Rate : 15.000008 Mbps  
S2 ModCod :  
- receiving : 14 8PSK-3/4  
- current max : 20 16APSK-4/5  
Pilot : On  
Frame length : Short  
DUB S2 Mode : ACM  
DUB S2 Stream type : MPEG-TS  
Roll off : 0.20  
SNR : 13.4 dB  
Input Power : -22 dBm

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT x SpeedOf.Me, HTML5 Speed T... x +

10.29.38.249/vmi/dwp/index\_page.dwp Pesquisar

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

# STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

**Device Status**

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:60:8a
DVB MAC Address	00:20:0e:10:60:8a
System Up Time	0 days, 00:23:48
CPU Load	13%
System Name	VIVO-PER-31135968-MG
System Contact	
System Location	REZENDE COSTA - MG
ODU Serial Number	104804040203090404140000
ODU HW Version	4.2

**Prompt de comando**

```
Resposta de 8.8.8.8: bytes=32 tempo=1073ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=736ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1310ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1306ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=727ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1072ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1219ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=617ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=704ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=622ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=957ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=646ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1210ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1319ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1240ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=561ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=633ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1070ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=712ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=2115ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=608ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=553ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=635ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=2020ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=534ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=566ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=641ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1005ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1071ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=2162ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1626ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=536ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=607ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=606ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=792ms TTL=55

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 254, Recebidos = 0 (0% de perda),
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 512ms, Máximo = 2415ms, Média = 1098ms
Control-C
^C
C:\Documents and Settings\Administrador>
```

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

