TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

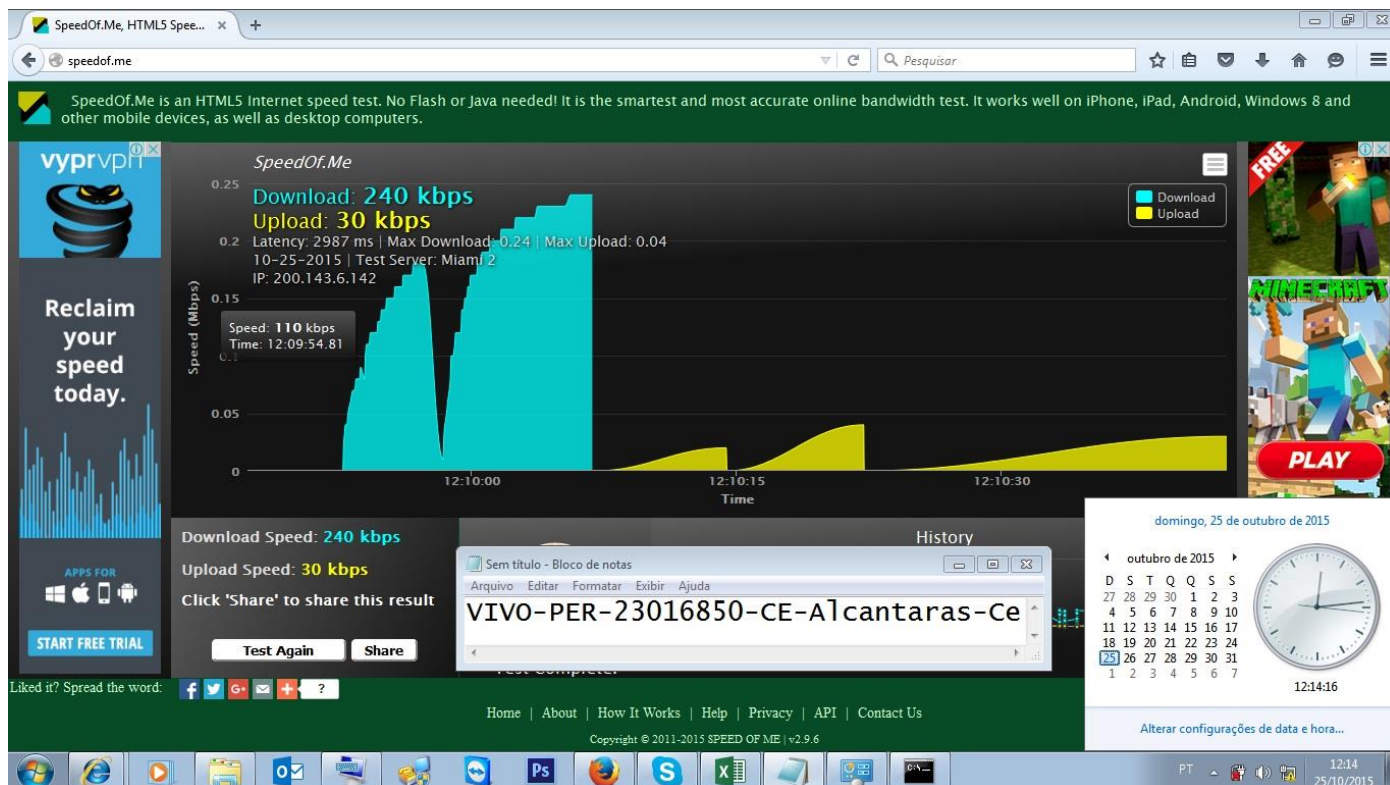**NOC/Operador:** Rogério Momi Frias

Cliente: VIVO

Empresa	VSAT-ID	Link kbps	Plataforma
EMC Brasil	VIVO-PER-23016850-CE	256/128	VSAT

Satellite (DVB) RX Configuration

Auto start   : Enabled
Max MODCOD   : 23   16APSK-9/10 (SNR threshold: 23.5 dB)
RX watchdog   : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode   PopId   Enable
* 0 0   9.320000   12.055825 DVB-S2 4   Yes

Satellite (DVB) Receiver Status

Rx State   : On
DVB State   : Forward link up
Network   : 1326, GlobalIP@Telstar-14R
Frequency   : 12.055931 GHz
Symbol Rate   : 9.319916 Msps
S2 ModCod
    - receiving : 16   8PSK-8/9
    - current max : 23   16APSK-9/10
Pilot   : On
Frame length   : Short
DVB S2 Mode   : ACM
Roll off   : 0.25
SNR   : 15.6 dB
Input Power   : -27 dBm

```
Satellite (DVB) TX Configuration
-------------------------------
Auto start        : Enabled
IDU Output Power    : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power    : 34.7 dBm
EIRP            : 48.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode         : VC-Mux
Header Compression  :  None


Satellite (DVB) Transmitter Status
--------------------------------
State          : On (TDMA)
IDU Output Power    : -17.0 dBm
ODU Output Power    : 34.4 dBm
EIRP           : 47.7 dBW
Eb/No          : 15.0 dB
Header Compression  : Disabled
Timing correction   : -206 us (262559 us)
Frequency correction: -410 Hz



ping 8.8.8.8
64 bytes from 8.8.8.8: time=540 ms
64 bytes from 8.8.8.8: time=630 ms
64 bytes from 8.8.8.8: time=540 ms
64 bytes from 8.8.8.8: time=580 ms
64 bytes from 8.8.8.8: time=640 ms

--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received,  0.00 percent packet loss
rtt min/avg/max = 540/580/640 ms
```