



NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-22001492-PI

Link kbps
1024k/256k

Plataforma VSAT

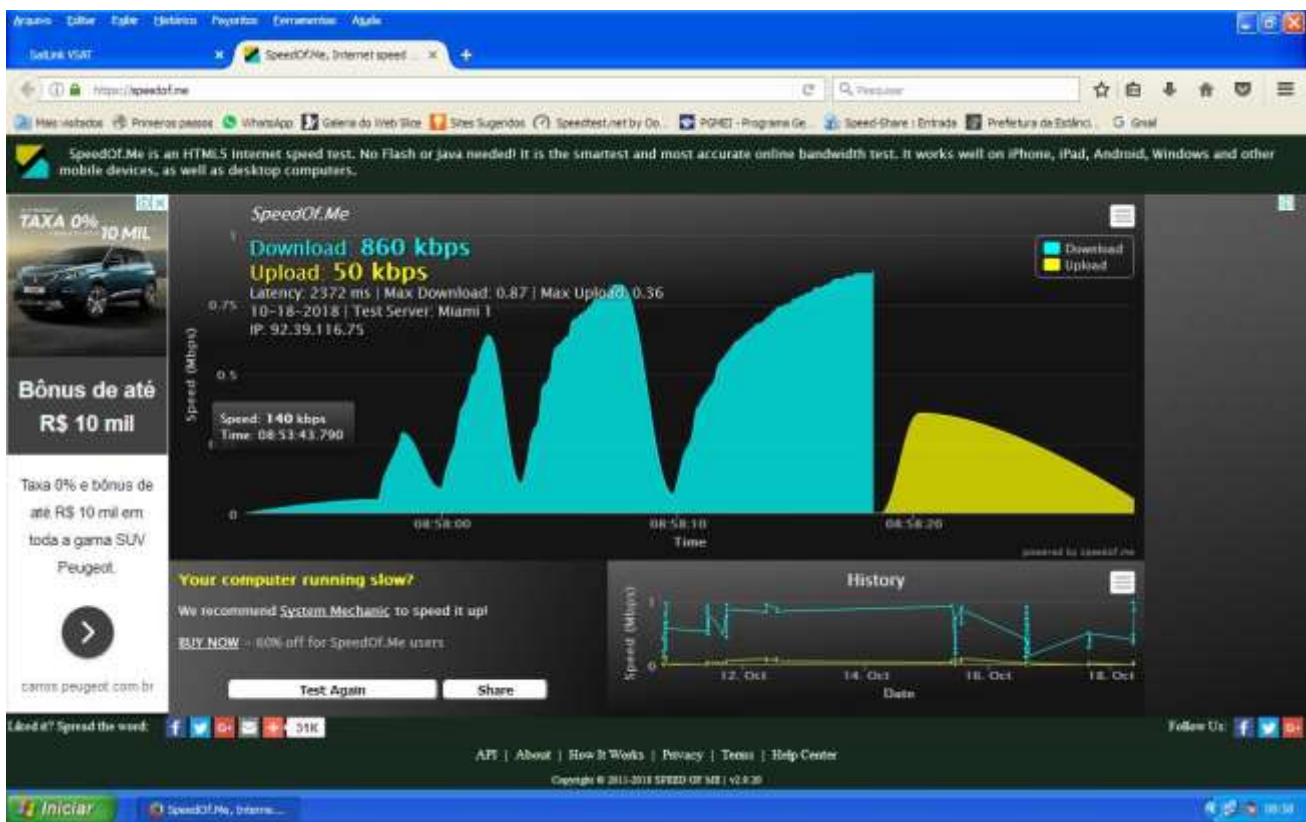

SatLink VSAT

10.29.75.32/vers/index_page.asp

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:8d:d0
DVB MAC Address	00:20:0e:10:8d:d0
System Up Time	0 days, 00:09:31
CPU Load	31%
System Name	VIVO-PER-22001492-PI
System Contact	
System Location	Barra - PI

You are logged in as install (2) on VIVO-PER-22001492-PI

© Copyright 2006-2018 H201Global Technologies AS ©. All Rights Reserved.

Prompt de comando

```
Resposta de 0.0.0.0: bytes=32 tempo=575ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=527ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=568ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=579ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=727ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=689ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=535ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=625ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=681ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=526ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=531ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=594ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=647ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=717ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=774ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=594ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=511ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=588ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=669ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=815ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=862ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=568ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=667ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=794ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=688ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=673ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=662ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=773ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=615ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=532ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=619ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=666ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=635ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=795ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=573ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=612ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=583ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=661ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=525ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=682ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=552ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=622ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=701ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=773ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=613ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=590ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=664ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=748ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=828ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=545ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=625ms TTL=117
Resposta de 0.0.0.0: bytes=32 tempo=793ms TTL=117

Estatísticas do Ping para 0.0.0.0:
Pacotes: Enviados = 73, Recibidos = 73, Perdidos = 0 (0% de perda),
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 544ms, Máximo = 1174ms, Média = 651ms
Control-C
C:\Documents and Settings\Administrador>
```

SatLink VSAT

10.29.75.32/vers/index_page.asp

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:8d:d0
DVB MAC Address	00:20:0e:10:8d:d0
System Up Time	0 days, 00:09:31
CPU Load	31%
System Name	VIVO-PER-22001492-PI
System Contact	
System Location	Barra - PI

You are logged in as install (2) on VIVO-PER-22001492-PI

© Copyright 2006-2018 H201Global Technologies AS ©. All Rights Reserved.

Prompt de comando

```
Adaptador Ethernet Conexão local:
Sufixo DNS específico de conexão :
Endereço IP : 10.29.75.34
Máscara de sub-rede : 255.255.255.248
Gateway padrão : 10.29.75.33

C:\Documents and Settings\Administrador>tracert 0.0.0.0

Rastreando a rota para google-public-dns-a.google.com [0.0.0.0]
com no máximo 30 saltos:

 1  <1 ms  <1 ms  <1 ms  192.168.11.1
 2  "      "      "      10.29.75.33
 3  "      "      "      Esgotado o tempo limite do pedido.
 4  1073 ms  1866 ms  3453 ms  172.30.3.102
 5  "      "      "      92.39.116.10
 6  1868 ms  3279 ms  2922 ms  static-1.112.39.92.in-addr.arpa [92.39.112.11]
 7  3163 ms  3176 ms  2946 ms  e200-189-162-154.ipb.dynu.net.br [200.189.162.154]
 8  "      "      "      200-147-20-129.static.uol.com.br [200.147.20.129]
 9  2005 ms  1511 ms  1605 ms  ac15169.saopaulo.sp.ix.br [187.16.216.55]
10  703 ms  970 ms  683 ms  180.170.245.161
11  1016 ms  651 ms  "      216.239.56.17
12  "      "      "      google-public-dns-a.google.com [0.0.0.0]

Rastreamento concluído.
```

