# NEC LCD Monitor

Rev.3.5

NDEX	
I. Application	3
II. Preparation	
2. Connectors and wiring	4
2.1 RS-232C Remote control	4
2.2 LAN control	4
III. Communication specification	5
3. Communication Parameter	5
3.1 RS-232C Remote control	5
3.2 LAN control	5
3.3 Communication timing	5
4. Communication Format	6
4.1 Header block format (fixed length)	7
4.2 Message block format	9
4.3 Check code	11
4.4 Delimiter	12
5. Message type	13
5.1 Get current Parameter from a monitor	13
5.2 "Get parameter" reply	14
5.3 Set parameter	15
5.4 "Set parameter" reply	16
5.5 Commands	17
5.5.1 Save Current Settings	17
5.5.2 Get Timing Report and Timing reply	18
5.5.3 NULL Message	19
IV. Control Commands	20
6. Typical procedure example	20
6.1. How to change the "Backlight" setting	20
6.2. How to read the measurement value of the built-in temperature sensors	23
6.3. Operation Code (OP code) Table	26
7. Power control procedure	36
7.1 Power status read	36
7.2 Power control	38
8. Asset Data read and write	40
8.1 Asset Data Read Request and reply	40
8.2 Asset Data write	42

9. Date & Time read and write	44
9.1 Date & Time Read	44
9.2 Date & Time Write	46
10. Schedule read and write	49
10.1 Schedule Read	49
10.2 Schedule Write	54
11. Self diagnosis	64
11.1 Self-diagnosis status read	64
12. Serial No. & Model Name Read	66
12.1 Serial No. Read	66
12.2 Model Name Read	67
13. Security Lock	68
13.1 Security Lock Control	68
14. Direct TV Chanel Read & Write	70
14.1 Direct TV Chanel Read & Reply	70
14.2 Direct TV Chanel Write & Reply	71

I. Application This document defi /P462 /P552 /P702 / /V463 /V423 when us	/V422 /V462 /V551	/V651 /V322	for control /V652 /V552	of the NEC LCD moniton /X461S /X551S /X401S	r, MultiSync P402 /X463UN /X551UN

# II. Preparation


### 2. Connectors and wiring

### 2.1 RS-232C Remote control

Connector: 9-pin D-Sub

Cable: Cross (reversed) cable or null modem cable

#### Connection

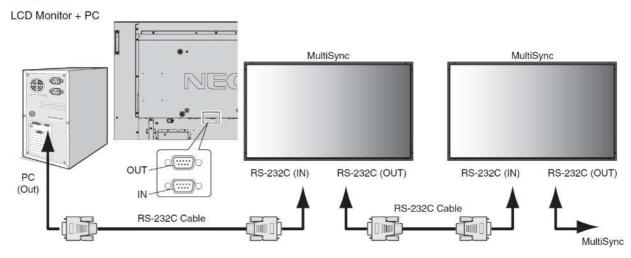


(Please refer "Controlling the LCD monitor via RS-232C Remote control" on User's manual.)

### 2.2 LAN control

Connector: RJ-45 10/100 BASE-T Cable: Category 5 or higher LAN cable

### Example of LAN connection:

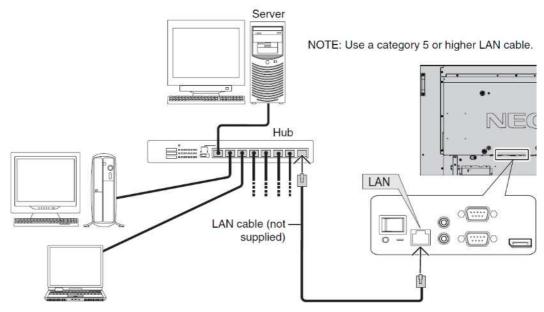

(Please refer "Controlling the LCD monitor via LAN control" on User's manual.)

### III. Communication specification

### 3. Communication Parameter

### 3.1 RS-232C Remote control

(1) Communication system
(2) Interface
(3) Baud rate
(4) Data length
(5) Parity
(6) Stop bit
(7) Communication code

Asynchronous
RS-232C
RS-2

#### 3.2 LAN control

(1) Communication system
(2) Interface Ethernet (CSMA/CD)
(3) Communication layer Transport layer (TCP)

\* Using the payload of TCP segment.
(4) IP address (Default) 192.168.0.10

\* If you need to change,
Please refer "Network settings" on User's manual.
(5) Port No. 7142 (Fixed)

(Note)

The monitor will disconnect the connection if no packet data is received for 15 minutes. And the controller (PC) has to re-connect to control the monitor again, after 15 minutes or more.

#### 3.3 Communication timing

The controller should wait for a packet interval before next command is sent. The packet interval needs to be longer than  $600\,\mathrm{msec}$  for the LCD monitor.


### 4. Communication Format

Header	Message	Check Code	Delimiter
--------	---------	------------	-----------


The command packet consists of four parts, Header, Message, Check code and Delimiter.

Recommended sequence of a typical procedure to control a monitor is as follows, [A controller and a monitor, two-way communication composition figure]

■ For the general command (see the part "6.3. Operation Code (OP code) Table")

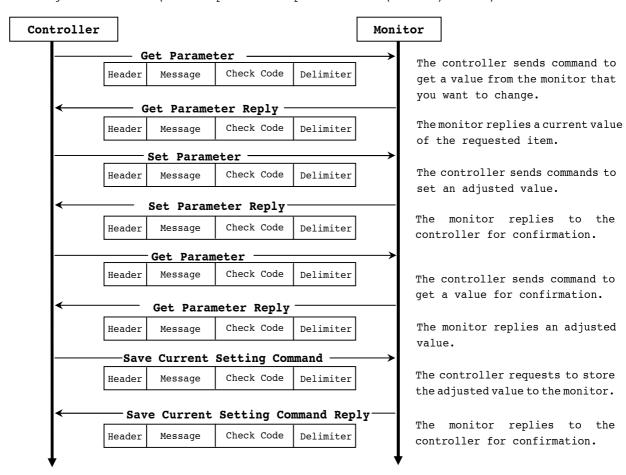

■ For the special command (see the part 7 to 14. and 5.5.2)

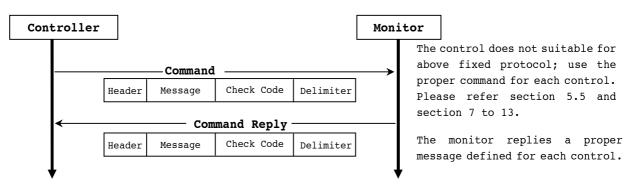

### 4.1 Header block format (fixed length)

Header	Message	Check code	Delimiter

SOH	Reserved	Destination	Source	Message Type	Message Length
1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>	4 <sup>th</sup>	5 <sup>th</sup>	6 <sup>th</sup> -7 <sup>th</sup>

1<sup>st</sup>byte) SOH: Start of Header ASCII SOH (01h)

 $2^{nd}$ byte) Reserved: Reserved for future extensions.

On this monitor, it must be ASCII '0'(30h).

3<sup>rd</sup>byte) Destination: Destination equipment ID. (Receiver)

Specify a commands receiver's address.

The controller sets the "MONITOR  $\ensuremath{\mathsf{ID}}\xspace"$  or "GROUP  $\ensuremath{\mathsf{ID}}\xspace"$  of the monitor controlled in here.

On the reply, the monitor sets 0' (30h), always.

"MONITOR ID", "GROUP ID" to "Destination Address" conversion table is as follows,

Monitor	Destination	Monitor	Destination	Monitor	Destination	Monitor	Destination
ID	Address	ID	Address	ID	Address	ID	Address
1	41h( 'A')	26	5Ah( \Z')	51	73h	76	8Ch
2	42h( `B')	27	5Bh	52	74h	77	8Dh
3	43h( `C')	28	5Ch	53	75h	78	8Eh
4	44h( `D')	29	5Dh	54	76h	79	8Fh
5	45h( `E')	30	5Eh	55	77h	80	90h
6	46h('F')	31	5Fh	56	78h	81	91h
7	47h( `G')	32	60h	57	79h	82	92h
8	48h('H')	33	61h	58	7Ah	83	93h
9	49h('I')	34	62h	59	7Bh	84	94h
10	4Ah('J')	35	63h	60	7Ch	85	95h
11	4Bh( 'K')	36	64h	61	7Dh	86	96h
12	4Ch('L')	37	65h	62	7Eh	87	97h
13	4Dh('M')	38	66h	63	7Fh	88	98h
14	4Eh('N')	39	67h	64	80h	89	99h
15	4Fh( 'O')	40	68h	65	81h	90	9Ah
16	50h('P')	41	69h	66	82h	91	9Bh
17	51h('Q')	42	6Ah	67	83h	92	9Ch
18	52h( 'R')	43	6Bh	68	84h	93	9Dh
19	53h( `S')	44	6Ch	69	85h	94	9Eh
20	54h('T')	45	6Dh	70	86h	95	9Fh
21	55h( 'U')	46	6Eh	71	87h	96	A0h
22	56h( 'V')	47	6Fh	72	88h	97	A1h
23	57h('W')	48	70h	73	89h	98	A2h
24	58h( 'X')	49	71h	74	8Ah	99	A3h
25	59h( `Y')	50	72h	75	8Bh	100	A4h
ALL	2Ah( \*′)	•					

Group	Destination	Group	Destination	Group	Destination	Group	Destination
ID	Address	ID	Address	ID	Address	ID	Address
A	31h('1')	D	34h('4')	G	37h('7')	J	3Ah(':')
В	32h('2')	E	35h('5')	H	38h('8')		
С	33h('3')	F	36h('6')	I	39h('9')		

Ex.) If you want to control a monitor that has the "ID No." as '1', specify a destination address

```
'A'(41h). If you want to control all of the monitors which are connected by a daisy chain, specify
a destination address '*'(2Ah).
4<sup>th</sup>byte) Source: Source equipment ID. (Sender)
   Specify a sender address.
   The controller must be '0' (30h).
   On the reply, the monitor sets the own MONITOR ID in here.
5<sup>th</sup>byte) Message Type: (Case sensitive.)
   Refer to section 4.2 "Message block format" for more details.
        ASCII 'A' (41h): Command.
        ASCII 'B' (42h): Command reply.
        ASCII 'C' (43h): Get current parameter from a monitor.
        ASCII 'D' (44h): "Get parameter" reply.
        ASCII 'E' (45h): Set parameter.
        ASCII 'F' (46h): "Set parameter" reply.
6^{th} -7<sup>th</sup> bytes) Message Length:
   Specify the length of the message (that follows the header) from STX to ETX.
   This length includes STX and ETX.
   The byte data must be encoded to ASCII characters.
   Ex.) The byte data 3Ah must be encoded to ASCII characters '3' and 'A' (33h and 41h).
        The byte data 0Bh must be encoded to ASCII characters '0' and 'B' (30h and 42h).
```

#### 4.2 Message block format

Header Message Check code Delimiter

"Message block format" is allied to the "Message Type" in the "Header".

Refer to the section 6 "Message format" for more detail.

#### 1) Get current parameter

The controller sends this message when you want to get the status of the monitor.

For the status that you want to get, specify the "OP code page" and "OP code", refer to "Appendix A. Operation code table".

"Message format" of the "Get current parameter" is as follows,

СШV	OP cod	de page	OP co	OP code				
SIX	Hi	Lo	Hi	Lo	EIA			

Refer to section 5.1 "Get current parameter from a monitor." for more details.

### 2) Get Parameter reply

The monitor will reply with the status of the requested item specified by the controller in the "Get parameter message".

"Message format" of the "Get parameter reply" is as follows,

STX	Re	sult		code age	OP c	ode	Туре	!	М	lax	va	lue	Curre	nt '	Val	ue	ETX
	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	MSB			LSB	MSB			LSB	

Refer to section 5.2 "Get parameter reply" for more details.

#### 3) Set parameter

The controller sends this message to change a setting of the monitor.

Message format of the "Set parameter" is as follows,

STX		code age	OP c	ode	Set V	alu	е		ETX
	Hi	Lo	Hi	Lo	MSB			LSB	

Refer to section 5.3 "Set parameter" for more details.

#### 4) Set Parameter reply

The monitor replies with this message for a confirmation of the "Set parameter message".

Message format of the "Set parameter reply" is as follows,

STX	Res	sult		code age	OP	code	Т	pe	М	ax v	val	ue	Requ	ıeste Va	d set lue	ting	ETX
	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	MSB			LSB	MSB			LSB	

Refer to section 5.4 "Set parameter reply" for more details.

### 5) Command

"Command message" format depends on each command.

Usually, this "command message" is used for some non-slider controls and some special operations, such as "Save current settings", "Get timing report", "power control", "Schedule", etc. Refer to

section 5.5 "Commands message" for more details.

### 6) Command reply

The monitor replies to a query from the controller.


"Command reply message" format depends on each command.

Refer to section 5.5 "Commands message" for more details.

### 4.3 Check code

Header Message	Check code	Delimiter
----------------	------------	-----------

Check code is the Block Check Code (BCC) between the Header and the End of Message except SOH.

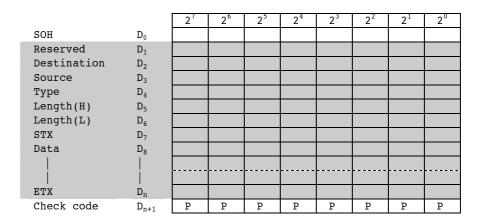

 $D_{n+1}$  =  $D_1$  XOR  $D_2$  XOR  $D_3$  XOR ,,,  $D_n$ 

XOR: Exclusive OR

Following is an example of a Check code (BCC) calculation.

= 77h

	Header									Message								
SOH	Reserved	Destination Address	Source Address	Message type	Message len	gth	STX OP c			OP code		e Set Value				ETX	code (BCC)	Delimiter
01	30	41	30	45	30	41	02	30	30	31	30	30	30	36	34	03	77	0 D
$D_0$	$D_1$	$D_2$	$D_3$	$D_4$	$D_5$	D <sub>6</sub>	D <sub>7</sub>	D <sub>8</sub>	D <sub>9</sub>	D <sub>10</sub>	D <sub>11</sub>	D <sub>12</sub>	D <sub>13</sub>	D <sub>14</sub>	D <sub>15</sub>	D <sub>16</sub>	D <sub>17</sub>	D <sub>18</sub>

Check code (BCC)  $D_{17} = D_1 \text{ xor } D_2 \text{ xor } D_3 \text{ xor ... xor } D_{14} \text{ xor } D_{15} \text{ xor } D_{16}$  = 30h xor 41h xor 30h xor 45h xor 30h xor 41h xor 02h xor 30h xor 30h xor 31h xor 30h xor 30h xor 30h xor 36h xor 34h xor 03h

### 4.4 Delimiter

Header Message Check code Delimiter

Packet delimiter code; ASCII CR(0Dh).

### 5. Message type

### 5.1 Get current Parameter from a monitor.

США	OP co	de page	OP co	EπV	
SIX	Hi	Lo	Hi	Lo	FIX
1 <sup>st</sup>	2 <sup>no</sup>	-3 <sup>rd</sup>	4	<sup>th</sup> -5 <sup>th</sup>	6 <sup>th</sup>

Send this message when you want to get the status of a monitor.

For the status that you want to get, specify the "OP code page" the "OP code", refer to "Appendix A. Operation code table".

```
1<sup>st</sup>byte) STX: Start of Message
   ASCII STX (02h)
2<sup>nd</sup>-3<sup>rd</sup>bytes) OP code page: Operation code page.
   Specify the "OP code page" for the control which you want to get the status.
   Refer to "Appendix A Operation code table" for each item.
   OP code page data must be encoded to ASCII characters.
   Ex.) The byte data 02h must be encoded to ASCII characters '0' and '2' (30h and 32h).
    OP code page 02h -> OP code page (Hi) = ASCII '0' (30h)
                          OP code page (Lo) = ASCII '2' (32h)
   Refer to Operation code table. (Appendix A)
4^{th}-5^{th}bytes) OP code: Operation code
   Refer to "Appendix A Operation code table" for each item.
   OP code data must be encoded to ASCII characters.
   Ex.) The byte data 3Ah must be encoded to ASCII characters '3' and 'A' (33h and 41h).
                          OP code (Hi) = ASCII '3' (33h)
   OP code 3Ah ->
                          OP code (Lo) = ASCII 'A' (41h)
   Refer to Operation code table.
6<sup>th</sup>byte) ETX: End of Message
   ASCII ETX (03h)
```

### 5.2 "Get parameter" reply

ÇͲV	Resu	ılt	OP co	de page	OP (	code	Ту	Type		Max value Current Value			Current Value		ETX		
STX	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	MSB			LSB	MSB			LSB	EIV
1 <sup>st</sup>	2 <sup>nd</sup> -3	3 <sup>rd</sup>	4 <sup>tl</sup>	<sup>h</sup> -5 <sup>th</sup>	6 <sup>th</sup>	-7 <sup>th</sup>	8 <sup>th</sup>	-9 <sup>th</sup>	1	0 <sup>th</sup>	-13	th		14 <sup>t</sup>	h -17	th	18 <sup>th</sup>

```
The monitor replies with a current value and the status of the requested item (operation code).
 1<sup>st</sup>byte) STX: Start of Message
    ASCII STX (02h)
 2<sup>nd</sup>-3<sup>rd</sup>bytes) Result code.
    These bytes indicate a result of the requested commands as follows,
         00h: No Error.
         \verb"olh: Unsupported" operation" with this monitor" or unsupported operation under current condition.
    This result code from the monitor is encoded to ASCII characters.
    Ex.) The byte data 01h is encoded to ASCII character '0' and '1' (30h and 31h).
 4^{th}-5^{th}bytes) OP code page: Operation code page.
    These bytes indicate a replying item's OP code page.
    This returned value from the monitor is encoded to ASCII characters.
    Ex.) The byte data 02h is encoded to ASCII character '0' and '2' (30h and 32h).
    Refer to the operation code table.
 6^{\text{th}} -7 th bytes) OP code: Operation code
    These bytes indicate a replying item's OP code.
    This returned value from the monitor is encoded to ASCII characters.
    Refer to the operation code table.
    Ex.) The byte data 1Ah is encoded to ASCII character '1' and 'A' (31h and 41h).
 8^{\rm th} -9 ^{\rm th} bytes) Type: Operation type code
         00h: Set parameter
         01h: Momentary
         Like the Auto Setup function which automatically changes the parameter.
    This returned value from the monitor is encoded to ASCII characters.
    Ex.) The byte data 01h is encoded to ASCII character '0' and '1' (30h and 31h).
 10<sup>th</sup>-13<sup>th</sup>bytes) Max. value: Maximum value which monitor can accept. (16bits)
    This returned value from the monitor is encoded to ASCII characters.
    Ex.) '0','1','2' and '3' means 0123h (291)
 14<sup>th</sup> -17<sup>th</sup>bytes) Current Value: (16bits)
    This returned value from the monitor is encoded to ASCII characters.
    Ex.) '0','1','2' and '3' means 0123h (291)
 18<sup>th</sup>byte) ETX: End of Message
    ASCII ETX (03h)
```

### 5.3 Set parameter

STX	OP code	e page	OP	code	Se	Set Value			
DIA	Hi	Lo	Hi	Lo	MSB		LSB	LIX	
1 <sup>st</sup>	2 <sup>nd</sup> -	3 <sup>rd</sup>	4 <sup>th</sup>	-5 <sup>th</sup>		6 <sup>th</sup> -9	th	10 <sup>th</sup>	

Send this message to change monitor's adjustment and so on.

The controller requests a monitor to change value.

1<sup>st</sup>byte) STX: Start of Message

ASCII STX (02h)

 $2^{nd}$ - $3^{rd}$ bytes) OP code page: Operation code page

This OP code page data must be encoded to ASCII characters.

Ex.) The byte data 02h must be encoded to ASCII '0' and '2' (30h and 32h).

Refer to the Operation code table.

 $4^{th}-5^{th}$ bytes) OP code: Operation code

This OP code data must be encoded to ASCII characters.

Refer to the Operation code table.

 $6^{th}-9^{th}$ bytes) Set value:(16bit)

This data must be encoded to ASCII characters.

Ex.) 
$$0123h \rightarrow 1^{st}(MSB) = ASCII '0' (30h)$$

$$2^{nd}$$
 = ASCII '1' (31h)

$$3^{rd} = ASCII '2' (32h)$$

$$4^{th}(LSB) = ASCII '3' (33h)$$

10<sup>th</sup>byte) ETX: End of Message

ASCII ETX (03h)

### 5.4 "Set parameter" reply

ASCII ETX (03h)

STX	Res	sult	OP C	ode page	OP	code	Т	Type Max value		Max value		Reque	Requested setting Value					
	Hi	Lo	Hi	Lo	Hi	Lo	Hi	Lo	MSB		LSB	MSB		LSB				
1 <sup>st</sup>	2 <sup>nd</sup>	-3 <sup>rd</sup>	4	th-5 <sup>th</sup>	6 <sup>th</sup>	-7 <sup>th</sup>	8 <sup>th</sup> -9 <sup>th</sup>		8 <sup>th</sup> -9 <sup>th</sup>		h-9 <sup>th</sup> 10 <sup>th</sup> -13 <sup>th</sup>		8 <sup>th</sup> -9 <sup>th</sup> 10 <sup>th</sup> -13 <sup>th</sup>		14 <sup>th</sup> -17 <sup>th</sup>		14 <sup>th</sup> -17 <sup>th</sup>	


```
The Monitor echoes back the parameter and status of the requested operation code.
1<sup>st</sup>byte) STX: Start of Message
   ASCII STX (02h)
2<sup>nd</sup>-3<sup>rd</sup>bytes) Result code
    ASCII '0''0' (30h, 30h): No Error.
   ASCII '0''1' (30h, 31h): Unsupported operation with this monitor or unsupported operation under
    current condition.
4^{\rm th}-5^{\rm th}bytes) OP code page: Echoes back the Operation code page for confirmation.
   Reply data from the monitor is encoded to ASCII characters.
                                     OP code page = ASCII '0' and '2' (30h and 32h)
   Ex.) OP code page 02h ->
   Refer to Operation code table.
6^{th}-7^{th}bytes) OP code: Echoes back the Operation code for confirmation.
   Reply data from the monitor is encoded to ASCII characters.
   Ex.) OP code 1Ah -> OP code (Hi) = ASCII '1' (31h)
                           OP code (Lo) = ASCII 'A' (41h)
   Refer to Operation code table
8^{\text{th}}-9^{\text{th}}bytes) Type: Operation type code
   ASCII '0''0' (30h, 30h): Set parameter
   ASCII '0''1' (30h, 31h): Momentary
   Like Auto Setup function, that automatically changes the parameter.
10^{\rm th}\text{--}13^{\rm th}bytes) Max. value: Maximum value that monitor can accept. (16bits)
   Reply data from the monitor is encoded to ASCII characters.
   Ex.) '0''1''2''3' means 0123h (291)
14^{\rm th} -17 th bytes) Requested setting Value: Echoes back the parameter for confirmation. (16bits)
   Reply data from the monitor is encoded to ASCII characters.
   Ex.) '0''1''2''3' means 0123h (291)
18^{\rm th}byte) ETX: End of Message
```

#### 5.5 Commands

"Command message format" depends on each command. Some commands are shown with usage. Refer to section 7 to 13.

### 5.5.1 Save Current Settings.

The controller requests for the monitor to store the adjusted value.



- > Send "OC"(30h, 43h) as Save current settings command.
- Complete "Save Current setting" command packet as follows;

ASCII: 01h-30h-41h-30h-41h-30h-34h-02h-30h-43h-03h-CHK-0Dh

The monitor replies the packet for confirmation as follows;

### 5.5.2 Get Timing Report and Timing reply.

The controller requests the monitor to report the displayed image timing.

cmv	Command	d code	EπV
SIA	'0'	'7'	LIA

- Send "07"(30h, 37h) as Get Timing Report command.
- Complete "Get Timing Report" command packet as follows;

ASCII: 01h-30h-41h-30h-41h-30h-34h-02h-30h-37h-03h-CHK-0Dh

The monitor replies status as the following format;

ĺ	СШЛ	Com	mand	1	SS		H F	req.			V F	req.		ΕΨV
	DIA	'4'	'E'	Hi	Lo	MSB			LSB	MSB			LSB	EIX

SS: Timing status byte

Bit 7 = 1: Sync Frequency is out of range.

Bit 6 = 1: Unstable count

Bit 5-2 Reserved (Don't care)

Bit 1 1:Positive Horizontal sync polarity.

0:Negative Horizontal sync polarity.

Bit 0 1:Positive Vertical sync polarity.

0:Negative Vertical sync polarity.

- H Freq: Horizontal Frequency in unit 0.01kHz
- V Freq: Vertical Frequency in unit 0.01Hz

Ex.) When H Freq is '1''2''A''9' (31h, 32h, 41h, 39h), it means 47.77kHz.

### 5.5.3 NULL Message

cmv	Command	d code	EmV
DIV	'B'	'E'	EIV

The NULL message returned from the monitor is used in the following cases;

- > To tell the controller that the monitor does not have any answer to give to the host (not ready or not expected)
- Following operations need a certain time for to execute, so the monitor will return this message when another message is received during execution.
  - $\diamond$  Power ON, Power OFF, Auto Setup, Input, PIP Input, Auto Setup and Factory reset.
- Complete "NULL Message" command packet as follows;

 $\tt 01h-30h-30h-41h-42h-30h-34h-02h-42h-45h-03h-CHK-0Dh$ 

SOH-'0'-'0'-'A'-'B'-'0'-'4'-STX-'B'-'E'-ETX-CHK- CR

### IV. Control Commands

### 6. Typical procedure example

The following is a sample of procedures to control the monitor, these are examples of "Get parameter",

"Set parameter" and "Save current settings".

### 6.1. How to change the "Backlight" setting.

 ${\tt Step 1. The controller \ requests \ the \ Monitor \ to \ reply \ with \ the \ current \ brightness \ setting \ and \ capability}$ 

to support this operation. (Get parameter)

Header	Message	Check code	Delimiter	
SOH-'0'-Monitor ID-'0'-'C'-'0'-'6'	STX-'0'-'0'-'1'-'0'-ETX	BCC	CR	

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID from which you want to get a value.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'C' (43h): Message type is "Get parameter command".
  '0'-'6' (30h, 36h): Message length is 6 bytes.
Message
  STX (02h): Start of Message
  '0'-'0' (30h, 30h): Operation code page number is 0.
  '1'-'0' (31h, 30h): Operation code is 10h (in the OP code page 0).
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Step 2. The monitor replies with current Backlight setting and capability to support this operation.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'D'-'1'-'2'	STX-'0'-'0'-'0'-'1'-'0'-'0'-'0'	BCC	CR
	-'0'-'0'-'6'-'4'-'0'-'0'-'3'-'2'-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
               Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'D' (44h): Message Type is "Get parameter reply".
  '1'-'2' (31h, 32h): Message length is 18 bytes.
Message
  STX (02h): Start of Message
  '0'-'0' (30h, 30h): Result code. No error.
  '0'-'0' (30h, 30h): Operation code page number is 0.
  '1'-'0' (31h, 30h): Operation code is 10h (in the page 0).
  ^{\text{'0'-'0'}} (30h, 30h): This operation is "Set parameter" type.
  '0'-'0'-'6'-'4' (30h, 30h, 36h, 34h): Backlight max value is 100(0064h).
'0'-'0'-'3'-'2' (30h, 30h, 33h, 32h): Current Backlight setting is 50(0032h).
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
```

Step 3. The controller request the monitor to change the Backlight setting

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'E'-'0'-'A'	STX-'0'-'0'-'1'-'0'-'0'-'0'-'5'-'0'-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to change a setting.
              Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  \ensuremath{^{'}\text{E'}} (45h): Message Type is "Set parameter command".
  '0'-'A' (30h, 41h): Message length is 10 bytes.
Message
 STX (02h): Start of Message
  '0'-'0' (30h, 30h): Operation code page number is 0.
  '1'-'0' (31h, 30h): Operation code is 10h (in the page 0).
  '0'-'0'-'5'-'0' (30h, 30h, 35h, 30h): Set Backlight setting 80(0050h).
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Step 4. The monitor replies with a message for confirmation.

Header	Message	Check code	Delimiter
SOH-'0'-'0'- Monitor ID -'F'-'1'-'2'	STX-'0'-'0'-'0'-'1'-'0'-'0'-'0'	BCC	CR
	-'0'-'6'-'4'-'0'-'0'-'5'-'0'-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'F' (46h): Message Type is "Set parameter reply".
  '1'-'2' (31h, 32h): Message length is 18 bytes.
 STX (02h): Start of Message
  '0'-'0' (30h, 30h): Result code. No error.
  '0'-'0' (30h, 30h): Operation code page number is 0.
  '1'-'0' (31h, 30h): Operation code is 10h (in the page 0).
  '0'-'0' (30h, 30h): This operation is "Set parameter" type.
  '0'-'0'-'6'-'4' (30h, 30h, 36h, 34h): Backlight max value is 100(0064h).
  '0'-'0'-'5'-'0' (30h, 30h, 35h, 30h): Received a Backlight setting was 80(0050h) .
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
 CR (0Dh): End of packet
     Repeat Step 1 and Step 2, if you need to check the Backlight setting. (Recommended)
Step 5. Request the monitor to store the Backlight setting. (Save Current Settings Command)
```

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'4'	STX-'0-'C'-ETX	BCC	CR

#### Header

SOH (01h): Start Of Header
'0' (30h): Reserved
Monitor ID: Specify the Monitor ID which you want to store the setting.
Ex.) If Monitor ID is '1', specify 'A'.
'0' (30h): Message sender is the controller.
'A' (41h): Message type is "Command".
'0'-'4' (30h, 34h): Message length is 4 bytes.

#### Message

STX (02h): Start of Message '0'-'C' (30h, 43h): Command code is 0Ch as "Save current settings". ETX (03h): End of Message

#### Check code

BCC: Block Check Code

Refer to the section 4.5 "Check code" for a BCC calculation.

#### Delimiter

CR (0Dh): End of packet

#### 6.2. How to read the measurement value of the built-in temperature sensors.

MultiSync P402 /P462 /P552 /P702 /V422 /V462 /V551 /V651 /V322 /V652 /V552 /X461S /X551S /X401S

/X463UN /X551UN /V463 /V423 have three built-in temperature sensors.

The controller can monitor inside temperatures by using those sensors with external control.

The following shows the procedure for reading the temperatures from the sensors.

Step 1. Select a temperature sensor which you want to read.

Header	Message	Check code	Delimiter	
SOH-'0'-MonitorID-'0'-'E'-'0'-'A'	STX-'0'-'2'-'7'-'8'-'0'-'0'-'0'-'1'-ETX	BCC	CR	

```
Header
 SOH (01h): Start of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID which you want to get a value.
            Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'E' (45h): Message Type is "Set parameter command".
  '0'-'A' (30h, 41h): Message length is 10 bytes.
Message
  STX (02h): Start of Message
  '0'-'2' (30h, 32h): Operation code page number is 2.
  '7'-'8' (37h, 38h): Operation code is 78h (on page 2).
  '0'-'0'-'1' (30h, 30h, 30h, 31h): Select the temperature sensor #1 (01h).
           00h: No meaning
           01h: Sensor #1
          02h: Sensor #2
          03h: Sensor #3
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Step 2. The monitor replies for confirmation.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'F'-'1'-'2'	STX-'0'-'0'-'0'-'2'-'7'-'8'-'0'-'0'-'0'-'0' -'0'-'3'-'0'-'0'-'1'-ETX	BCC	CR

```
Header

SOH (01h): Start of Header

'0' (30h): Reserved

'0' (30h): Message receiver is the controller.

Monitor ID: Indicates a replying Monitor ID.

Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.

'F' (46h): Message Type is "Set parameter reply".

'1'-'2' (31h, 32h): Message length is 18 bytes.

Message

STX (02h): Start of Message

'0'-'0' (30h, 30h): Result code. No error.

'0'-'2' (30h, 32h): Operation code page number is 2.

'7'-'8' (37h, 38h): Operation code is 78h (in the page 2).
```

```
'0'-'0' (30h, 30h): This operation is "Set parameter" type.
'0'-'0'-'0'-'3' (30h, 30h, 30h, 33h): Number of temperature sensors are 3 (0003h).
'0'-'0'-'0'-'1' (30h, 30h, 30h, 31h): temperature sensor is #1.
ETX (03h): End of Message

Check code
BCC: Block Check Code
Refer to the section 4.5 "Check code" for a BCC calculation.

Delimiter
CR (0Dh): End of packet
```

Step 3. The controller requests the monitor to send the temperature from the selected sensor.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'C'-'0'-'6'	STX-'0'-'2'-'7'-'9'-ETX	BCC	CR

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID which you want to get a value.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'C' (43h): Message Type is "Get parameter".
  '0'-'6' (30h, 36h): Message length is 6 bytes.
Message
 STX (02h): Start of Message
  '0'-'2' (30h, 32h): Operation code page number is 2.
  '7'-'9' (37h, 39h): Operation code is 79h (in the page 2).
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Step 4. The monitor replies a temperature of selected sensor.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'D'-'1'-'2'	STX-'0'-'0'-'2'-'7'-'9'-'0'-'0'	BCC	CR
	-'F'-'F'-'F'-'F'-'0'-'0'-'3'-'2'-ETX		

```
Header

SOH (01h): Start of Header

'0' (30h): Reserved

'0' (30h): Message receiver is the controller.

Monitor ID: Indicate a replying Monitor ID.

Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.

'D' (44h): Message Type is "Get parameter reply".

'1'-'2' (31h, 32h): Message length is 18 bytes.

Message

STX (02h): Start of Message

'0'-'0' (30h, 30h): Result code. No error.

'0'-'2' (30h, 32h): Operation code page number is 2.

'7'-'9' (37h, 39h): Operation code is 79h (in the page 2).

'0'-'0' (30h, 30h): This operation is "Set parameter" type.

'F'-'F'-'F'-'F' (46h, 46h, 46h, 46h): Maximum value.

'0'-'0'-'3'-'2' (30h, 30h, 33h, 32h): The temperature is 25 degrees Celsius.
```

Readout value is 2's complement.

Temperature[Celsius]	Readout value				
Temperacure [cersius]	Binary	Hexadecimal			
+125.0	0000 0000 1111 1010	00FAh			
+ 25.0	0000 0000 0011 0010	0032h			
+ 0.5	0000 0000 0000 0001	0001h			
0	0000 0000 0000 0000	0000h			
- 0.5	1111 1111 1111 1111	FFFFh			
- 25.0	1111 1111 1100 1110	FFCEh			
- 55.0	1111 1111 1001 0010	FF92h			

ETX (03h): End of Message

Check code

BCC: Block Check Code

Refer to the section 4.5 "Check code" for a BCC calculation.

Delimiter

CR (0Dh): End of packet

# 6.3. Operation Code (OP code) Table

	T+om		OD	OD anda	Domomotom	Domonles
	Item		OP cod	OP code	Parameter	Remarks
			e			
			pag			
			е			
	Backlight		00h	10h	0: dark	
					100/641) 1 1 1 1	
	Contrast		00h	12h	100(64h): bright 0: low	
	Contrast		0011	1211	0: 10w 	
					100(64h): high	
	Sharpness		00h	8Ch	0: dull	
			0.01	0.01	24(18h): sharp	
	Brightnes	S	00h	92h	0: dark	
					   100(64h): bright	
	Hue		00h	90h	0: purplish	
					100(64h): greenish	
	Color		02h	1Fh	0: pale	
					100/645) - 4	
	Color Tem	noraturo	00h	54h	100(64h): deep 0:2600K	100K/step
	COIOI Tem	peracure	0011	3411	0.2000K	100K/Scep
					74(4Ah):10000K	
	Color con	trol	00h	Red: 9Bh	0:	
				Yellow:		
				9Ch	100(64h):(center)	
				Green: 9Dh	 200(C8h):	
				Cyan:	200(C811):	
5-3				9Eh		
PICTURE				Blue:		
CI				9Fh		
PI				Magenta:		
			0.21-	A0h 68h	Garrier -	
	Gamma Cor	rection	02h	081	Gamma Table Selection	
					1: Native Gamma	
					4: Gamma=2.2	
					8: Gamma=2.4	
					7: S Gamma	
					5: DICOM SIM.	
	Marri -	Adam+	0.01-	ODb	6: Programmable	
	Movie Settings	Adaptive Contrast	02h	8Dh	0: None 1: Off	
	Sectings	Concrust			2: Low	
					3: Middle	
					4: High	
		Noise	02h	26h	0: Off	Page02-20 also
		Reduction			[ ]	works as same.
		mologine	02h	23h	5: High	
		Telecine	UZN	2311	1: Off 2: Auto	
	Picture m	Picture mode		1Ah	1: sRGB	sRGB:
			02h		3: Hi-Bright	PC mode only
					4: Standard	Cinema:
					5: Cinema	A/V mode only
					6: ISF-Day	
					7: ISF-Night	ISF-Day:
					11(0Bh): Ambient-1 12(0Ch): Ambient-2	ISF-Night: Each needs an
					12(von). Ambienc-2	adjustment by ISF.
	l		1			aajabemene by ibr.

	T+om		OP	OP code	Darameter	Remarks
	Item		cod	OP Code	Parameter	Kelliat KS
			e			
			pag			
-	3 -1 1 - 1	1 - 11 -	е			
	Ambient	Ambient	10h	33h	0: dark	
		Brightness				
		Low			100(64h): bright	
		Ambient	10h	34h	0: dark	
		Brightness				
		High			100(64h): bright	
		Get Current	02h	B4h	0:	Read only
		Illuminanc				
		е			Max.	
		Bright	02h	B5h	0:	Read only
		Sensor Read				
					255(FFh)	
	Menu tree		02h	CBh	0: None	Momentary
	(Picture)				2: Reset	
					Picture category	
	Auto Setu	р	00h	1Eh	1: Execute	Momentary
	Auto Adju	st			N/A	_
	H Positio		00h	20h	0: Left side	Depends on a display
						timing
					Max.: Right side	
	V Positio	n	00h	30h	0: Bottom side	Depends on a display
						timing
					Max.: Top side	
E-1	Clock		00h	0Eh	0:	
US.	020011		0011	·		
ADJUST					Max.:	
A	Phase		00h	3Eh	0:	
	Thabe		0011	3111		
					Max.:	
	H Resolut	ion	02h	50h	0: Low	
	n kesolut	.1011	0211	2011		
					May . High	
	V Resolut	ion	02h	51h	Max.: High 0: Low	
	v kesolut	.1011	0211	2111	O: TOM	
					Mary a High	
1					Max.: High	1

	Item		OP	OP code	Parameter	Remarks
	100111		cod	or code	Turumeter	Remains
			е			
			pag			
			е			
	Input Resolution		02h	DAh	Input Resolution select	
					0:no mean	
					1:Item 1(always Auto)	
					2:Item 2	
					3:Item 3	
					4:Item 4	
					5:Item 5	
					Over5:Ignore	
					Ex)	
					Item 1= AUTO	
					Item 2= /	
					1024x768 /	
					1400x1050 /	
					800x600 / 1280x960	
					Item 3=/	
					1280x768 /	
					1680x1050 /	
					1024x576 /	
					1600x900 / Item 4= /	
					1360x768 /	
					/	
					/	
					-,	
					Item 5= /	
					1366x768	
					/	
1					1	
	Aspect		02h	70h	0: No operate	Wide:
	Aspect		02h	70h	0: No operate 1: Normal	Dynamic
	Aspect		02h	70h	0: No operate 1: Normal 2: Full	
	Aspect		02h	70h	0: No operate 1: Normal 2: Full 3: Wide	Dynamic
	Aspect		02h	70h	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom	Dynamic
	Aspect		02h	70h	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved)	Dynamic
	Aspect		02h	70h	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic	Dynamic
	Aspect	Zoom	02h	70h	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot)	Dynamic
		Zoom			0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic	Dynamic
	Zoom	Zoom			0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100%	Dynamic
	Zoom	Zoom			0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100%	Dynamic
	Zoom	Zoom			0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%	Dynamic
	Zoom		02h	6Fh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300%	Dynamic
	Zoom	Zoom	02h	6Fh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100%	Dynamic
	Zoom	Zoom	02h	6Fh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100%	Dynamic
	Zoom	Zoom H-Expansion	02h	6Fh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%	Dynamic
	Zoom	Zoom H-Expansion	02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300%	Dynamic
	Zoom	Zoom H-Expansion	02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100%	Dynamic
	Zoom	Zoom H-Expansion	02h 02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%   201:300%	Dynamic
	Zoom	Zoom H-Expansion  Zoom V-Expansion	02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%	Dynamic
	Zoom	Zoom H-Expansion Zoom V-Expansion	02h 02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 0: Left side	Dynamic
	Zoom	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position	02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 0: Left side   Max.: Right side	Dynamic
	Zoom	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position	02h 02h	6Fh 6Ch	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 0: Left side	Dynamic
	Zoom	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position	02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%   Max: Right side 0: Down side	Dynamic
	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot)  1:100% 2:101%   201:300%  1:100% 2:101%   201:300%  1:100% 0: Left side   Max.: Right side  0: Down side   Max.: Up side	Dynamic A/V mode only
	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%   Max.: Right side 0: Down side   Max.: Up side 0: None	Dynamic
	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot)  1:100% 2:101%   201:300%  1:100% 2:101%   201:300%  1:100% 0: Left side   Max.: Right side  0: Down side   Max.: Up side  0: None 3: Reset	Dynamic A/V mode only
01	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h 02h 02h	6Fh 6Ch CDh CBh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%   Max.: Right side 0: Down side   Max.: Up side 0: None 3: Reset Adjust category	Dynamic A/V mode only  Momentary
OIGN	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h 02h	6Fh 6Ch CCh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot)  1:100% 2:101%   201:300%  1:100% 2:101%   201:300%  1:100% 0: Left side   Max.: Right side  0: Down side   Max.: Up side  0: None 3: Reset	Dynamic A/V mode only
AUDIO	Zoom Control	Zoom H-Expansion  Zoom V-Expansion  Zoom H-Position  Zoom V-Position	02h 02h 02h 02h 02h	6Fh 6Ch CDh CBh	0: No operate 1: Normal 2: Full 3: Wide 4: Zoom 5: (reserved) 6: Dynamic 7: Off (dot by dot) 1:100% 2:101%   201:300% 1:100% 2:101%   201:300% 1:100% 2:101%   Max.: Right side 0: Down side   Max.: Up side 0: None 3: Reset Adjust category	Dynamic A/V mode only  Momentary

		1		T = -	T = 1
	Item	OP	OP code	Parameter	Remarks
		cod e			
		pag			
		e			
	Balance	00h	93h	0: Left	Not available on
					X463UN,X551UN
				30:(Center)	
	Treble	00h	8Fh	60: Right O: Min.	Not available on
	Tiebie	0011	0111	O: MIN.	X463UN, X551UN
				6:(Center)	A4030N/A3310N
				12: Max.	
	Bass	00h	91h	0: Min.	Not available on
					X463UN, X551UN
				6:(Center)	
				12: Max.	
	PIP Audio	10h	80h	0: No operate	
				1: Main	
				2: Sub	
	Line out	10h	81h	0: No operate	
				1: Fixed	
				2: Variable	
	SURROUND	02h	34h	1: Off	Not available on
				2: Low (or On) 3: High (or On)	X463UN, X551UN
	Audio Input	02h	2Eh	1: Audio 1(PC)	
	nadio inpac	0211	2211	2: Audio 2	
				3: Audio 3	
				4: HDMI	
				6: TV/Option	
		001	an!	7: Display Port	
	Menu tree reset (Audio)	02h	CBh	0: None 4: Reset	Momentary
	(Addio)			Audio category	
	Off Timer	02h	2Bh	0: Off	1 hour/step
	011 1101	0211	22	1: 1 hour	1 11041, 2005
				24: 24 hours	
	Enable Schedule	02h	E5h	0: No Mean	
띰				1: No.1 Enable	
DOI				7: No.7 Enable	
SCHDULE	Disable Schedule	02h	E6h	0: No Mean	
01	Dibable beneaute	0211	2011	1: No.1 Disable	
				7: No.7 Disable	
	Menu tree reset	02h	CBh	0: None	Momentary
	(Schedule)			5: Reset	
	Keep PIP Mode	10h	82h	Schedule category 0: No operate	
	weeh tit mode	1011	0211	1: Off	
				2: On	
	PIP Mode	02h	72h	1: Off	
				2: PIP	
				3: POP	
ο.				4: Still	
PIP				5: Side by side (aspect)	
				(aspect) 6: Side by side	
				(Full)	
				7: (reserved)	
				8: (reserved)	
	PIP Size	02h	71h	1: Small	
				2: Middle	
Ĭ .				3: Large	

PIP N Position		Item		OP	OP code	Parameter	Remarks
Pag							
PIF B Position							
FIP V Position		PIP H Position		02h	74h	0: left	
FIP V Position						100(64h): right	
Aspect		PIP V Posi	ition	02h	75h		
Aspect							
1: Normal   2: Full   3: Wide   4: (reserved)   5: (reserved)   5: (reserved)   5: (reserved)   5: (reserved)   5: (reserved)   5: (reserved)   7: Normal   2: Horizontal   3: Vertical   7: Normal   7: Normal		Aspect		10h	83h		
Six wide		поресс		1011	0011	1: Normal	
Sic   Sic							
Text							
Ticker						5: (reserved)	
Position   10h   09h   0: Top/Left   100: Bottom/Right			Mode	10h	08h		
Position   10h   09h   0: Top/Left   100: Bottom/Right		Ticker					
						3: Vertical	
Size			Position	10h	09h	0: Top/Left	
Size						100: Bottom/Right	
			Size	10h	0Ah	0-1: Do not set.	
Blend   10h   0Bh     1: 10%     10: 100%     10: 100%						2: Narrow(2/24)	
Blend   10h   0Bh     1: 10%     10: 100%     10: 100%						8: Wide(8/24)	
Detect			Blend	10h	0Bh	1: 10%	
Detect						10. 100%	
1: Auto   2: Off			Detect	10h	0Ch		
Pade In						1: Auto	
1: On			Endo In	10h	ODh		
PIP Input(Sub input)			rade in	1011	UDII		
1: VGA						II.	
		PIP Input	(Sub input)	02h	73h		
A							
S: Video1							
G: Video2   7: S-Video   12(0Ch): DVD/HD1   13(0Dh): Option   14(0Eh): DVD/HD2   15(0Fh): Display   Port   17(11h): HDMI							
12(0Ch): DVD/HD1   13(0Dh): Option   14(0Eh): DVD/HD2   15(0Fh): Display   Port   17(11h): HDMI							manuar.
13(0Dh): Option   14(0Eh): DVD/HD2   15(0Fh): Display   Port   17(11h): HDMI							
14(0Eh): DVD/HD2   15(0Fh): Display   Port   17(11h): HDMI							
Menu tree reset							
17(11h): HDMI   Menu tree reset (PIP)   Category   Momentary   Momentary   Category						15(0Fh): Display	
Menu tree reset (PIP)							
Category   Category		Menu tree	reset	02h	CBh		Momentary
Language		(PIP)					
2: German 3: French 4: Spanish 5: Japanese 6: Italian 7: Swedish 9: Russian 14(0Eh): Chinese  Menu Display Time  00h FCh 0-1: Do not set. 2: 10s 3: 15s		Language		00h	68h		OSD Language
## Spanish   5: Japanese   6: Italian   7: Swedish   9: Russian   14(0Eh): Chinese		Language		0011	0011	2: German	Job Language
5: Japanese   6: Italian   7: Swedish   9: Russian   14(0Eh): Chinese							
6: Italian 7: Swedish 9: Russian 14(0Eh): Chinese  Menu Display Time  00h FCh 0-1: Do not set. 2: 10s 3: 15s							
14(0Eh): Chinese						6: Italian	
14(0Eh): Chinese	OSC						
Menu Display Time 00h FCh 0-1: Do not set. 5sec/step 2: 10s 3: 15s							
3: 15s		Menu Displ	lay Time	00h	FCh		5sec/step
48: 240s						3: 15s	
						48: 240s	

	T+c		O.D.	OD ~~-1-	Darameter	Doma visa
	Item		OP cod	OP code	Parameter	Remarks
			е			
			pag			
	OSD	Н	e 02h	38h	0: Left	
	Position	Position	0211	5011		
					MAX.: Right	
		V Position	02h	39h	0: Down	
		robicion			MAX.: Up	
	Informatio	n OSD	02h	3Dh	0:Disable information OSD	
					3-10: OSD timer [seconds]	
	OSD Transp	arency	02h	B8h	0: None	
	-	-			1: Off(Opaque)	
					2: On(Translucent)	
	OSD Rotati	on	02h	41h	3: (reserved) 0: Normal	
	ODD ROCACI	Oli	0211	4111	1: Rotated	
	Closed Cap	tion	10h	84h	0. No operato	
	crosed cap	CTOII	1011	0411	0: No operate 1: Off	
					2: CC1	
					3: CC2	
					4: CC3 5: CC4	
					6: TT1	
					7: TT2	
					8: TT3 9: TT4	
					J. 114	
	Menu tree	reset	02h	CBh	0: None	Momentary
	(OSD)				7: Reset OSD category	
					ODD category	
	Monitor ID		02h	3Eh	1-100:ID	
	Group ID		10h	7Fh	0: No assignment 1: Group A	Bit0:Group A Bit1:Group B
					2: Group B	Bit2:Group C
					3: Group AB	Bit3:Group D
					4: Group C	Bit4:Group E
					5: Group AC	Bit5:Group F Bit6:Group G
					1023:Group ABCDEFGHIJ	Bit7:Group H
						Bit8:Group I
	IP Control		024	2 E.P	1. Normal	Bit9:Group J
	IR Control		02h	3Fh	1: Normal 2: Primary	
LAY					3: Secondary	
DISPLAY	m' 7		201	D0'	4: Lock (Off)	77
	Tile Matrix	H monitor	02h	D0h		Number of H-division
MULTI	HUCLIA				10	OI II-UIVIBIUII
MU		V monitor	02h	D1h	1	Number
					10	of V-division
		Position	02h	D2h	1: Upper left	
		Tile comp	02h	D5h	MAX.: Lower right 1: Disable (Off)	
			0211		2: Enable (On)	
		Mode	02h	D3h	1: Disable (Off)	
					and display frame 2: Enable (On)	
					3: Disable (Off)	
					and erase frame	
					(Set only)	

	T.		1 '			1 5
	Item		OP cod e pag e	OP code	Parameter	Remarks
	Tile Matrix Mem		10h	4Ah	0: None 1: Common(default) 2: Each Input	
	Power On	Delay	02h	D8h	0: Off (0sec)     50:50sec	
	Power Ind	icator	02h	BEh	0: None 1: On 2: Off	
	External control	Control	10h	3Eh	0: No mean 1: RS-232C 2: LAN	
		ID=All Reply	10h	85h	0: No operate 1: On 2: Off	
	Setting c	ору			N/A	
	Menu tree (Multi Di		02h	CBh	0: None 8: Reset Multi Display category	Momentary
	Power Save		00h	E1h	0: Off 1: On	
	Video Power Save		02h	D6h	0: No mean 1: Off 2: On	
	Fan Control		02h	7Dh	0: None 1: Auto(No offset) 2: Forced ON 3: Auto(offset -2) 4: Auto(offset -4) 5: Auto(offset -6) 6: Auto(offset -8) 7: Auto(offset -10)	Offset affects to a selected sensor.
OTECTION	Fan Speed		10h	3Fh	0: None 1: High 2: Low	
PR	Screen Saver	Gamma	02h	DBh	1: normal 2:screen saving gamma	
DISPLAY		Brightness	02h	DCh	1:normal 2:decrease brightness	
IQ		Motion	02h	DDh	0: 0s(Off)     90: 900s	10s/step
	Side Border Color		02h	DFh	0: Black   100: White	
	Auto Brightness		02h	2Dh	0: Off 1: On	
	Alert Mail		10h	8Bh	0: No mean 1: Off 2: On	
	Menu tree reset (Display Protection)		02h	CBh	0: None 9: Reset Display Protection category	Momentary
Advanced Option	Input Det	ect	02h	40h	0: First detect 1: Last detect 2: None 3: VIDEO detect 4: Custom detect	

T+ om		OD	OP code	Parameter	Remarks
Item		OP cod	OP Code	Parameter	Remarks
		e			
		pag			
		e			
Custom	Priority1	10h	2Eh	0: No mean	
Detect				1: VGA	
				2: RGB/HV	
	Priority2	10h	2Fh	3: DVI	
				4: HDMI (Set only)	
	Priority3	10h	30h	5: Video1	
	PITOTICYS	1011	3011	6: Video2	
				7: S-Video 12(0Ch): DVD/HD1	
	Priority4	10h	31h	13(0Dh): Option	
				14(0Eh): DVD/HD2	
				15(0Fh): Display	
	Priority5	10h	32h	Port	
				17(11h): HDMI	
Input cha	inge	10h	86h	0: No operate	
_	-			1: Normal	
				2: Quick	
Terminal	DVI Mode	02h	CFh	1: DVI-PC	
Setting				2: DVI-HD	
_	BNC Mode	10h	7Eh	0: No operate	Not available on
				1: RGB	except
				2: Component	X461S/X401S/X551S/
				3: Video	V322/V463/V423.
				4: SCART	
				5: S-Video(※)	<pre>%Only V652/V552</pre>
	D-sub Mode	10h	8Eh	0: No operate	Only
				1: RGB	X461S/X401S/X551S/
				2: Component	V322/V463/V423
				3: Video	
				4: SCART 5: S-Video	
	UDMI Cianal	10h	40h	0: None	
	HDMI Signal	10 n	40n	1: Expand	
				2: Raw	
Deinterla	100	02h	25h	1: Off(INTERLACE)	
Defineria	.00	0211	2 311	2: Enable	
				(IP ON/PROGRESSIVE)	
Color Sys	stem	02h	21h	1: NTSC	
			<del>-</del>	2: PAL	
				3: SECAM	
				4: Auto	
				5: 4.43NTSC	
				6: PAL-60	
Over Scan	1	02h	E3h	1: Off	
				2: On	
Option Se	tting Audio	10h	B0h	0: No operate	
=	=			1: analog	
				2: digital	
Motion		10h	87h	0: No operate	Not available on
Comp	ensation(120H			1: On	V322/X401S/V652/V5
z)				2: Off	52/V463/V423.
TOUCH PAN	IEL			N/A	
Menu tree	e reset	02h	CBh	0: None	Momentary
(Advanced				10: Reset Advanced option	
•	- ,			category	
Menu tree	reset	02h	CBh	0: None	Momentary
(Factory	reset)			1: Factory Reset	

	Item	OP	OP code	Parameter	Remarks
	1 0011	cod	01 0040	Tarameter	Nomal No
		е			
		pag			
	Tnnut	e 00h	60h	0: No mean	
	Input	0011	6011	1: VGA	
				2: RGB/HV	
				3: DVI	
				4: HDMI (Set only)	
				5: Video1	
				6: Video2	
				7: S-Video	
				12(0Ch): DVD/HD1 13(0Dh): Option	
				14(0Eh): DVD/HD2	
				15(0Fh): Display	
				Port	
				17(11h): HDMI	
	Audio Input	02h	2Eh	1: Audio 1(PC)	
				2: Audio 2	
				3: Audio 3 4: HDMI	
				6: TV/Option	
				7: Display Port	
	Volume UP/Down	00h	62h	0: whisper	
				100: loud	
	Mute	00h	8Dh	0: UNMUTE(Set only)	
				1: MUTE	
	SCREEN MUTE	10h	B6h	2: UNMUTE 0: None	
	SCREEN MUIE	1011	БОП	1: SCREEN MUTE ON	
				2: SCREEN MUTE OFF	
	MTS	02h	2Ch	0: None	This operation
				1: Main	requires supported
				2: Sub	option TV tuner.
		0.01	0.41	3: Main + Sub	_
	Sound	02h	34h	1: Off	Same as `SURROUND'
				2: Low (or On) 3: High (or On)	SURROUND
	Picture Mode	02h	1Ah	1: sRGB	sRGB:
				3: Hi-Bright	PC mode only
				4: Standard	Cinema:
				5: Cinema	A/V mode only
				6: ISF-Day	TGT D
				7: ISF-Night 11(0Bh): Ambient-1	ISF-Day: ISF-Night:
				11(0Bh): Amblent-1 12(0Ch): Ambient-2	Each needs an
					adjustment by ISF.
	Aspect	02h	70h	0: No operate	Wide:
	_			1: Normal	A/V mode only
				2: Full	
				3: Wide	
				4: Zoom 5: (reserved)	
				6: Dynamic	
				7: Off (dot by dot)	
	PIP ON/OFF	02h	72h	1: Off	
	Still ON/OFF			2: PIP	
				3: POP	
				4: Still	
				5:Side by side	
				(aspect) 6: Side by side	
				6: Side by side (Full)	
$\Box$		1		(+ 4++)	

	Item	OP	OP code	Parameter	Remarks
		cod			
		е			
		pag			
		е			
	PIP Input	02h	73h	0: No mean	This operation has
				1: VGA 2: RGB/HV	limitation of selection. Please
				2: RGB/HV 3: DVI	refer to the monitor
				4: HDMI (Set only)	instruction
				5: Video1	manual.
				6: Video2	
				7: S-Video	
				12(0Ch): DVD/HD1	
				13(0Dh): Option	
				14(0Eh): DVD/HD2	
				15(0Fh): Display Port	
				17(11h): HDMI	
•	Still Capture	02h	76h	0: Off	Momentary
	Delli Supeule	0211	, 511	1: Capture	Homeneal j
	Signal Information	02h	EAh	0: No Action	
	-			1: Off	
				(No indication)	
				2: On	
		_		(Indication)	
	Auto Setup	00h	1Eh	1: Execute	Momentary
	TV-Channel UP/DOWN	00h	8Bh	0: No Action	This operation
				1: Up 2: Down	requires supported option TV tuner.
συ	Select Temperature	02h	78h	1: Sensor #1	operon iv cuner.
ur.	sensor	0211	7011	2: Sensor #2	
so				3: Sensor #3	
Temperature sensor	Readout a temperature	02h	79h	Returned value is 2's	Read only
me or	_			complement.	_
Г				Refer to section 6.2	
	Readout carbon	10h	10h	0:	Read only
	footprint				
Carbon footprint	(g) Readout carbon	10h	11h	999:	D11
	footprint carbon	1011	lin		Read only
	(kg)			65535:	
Ť	Readout carbon Usage	10h	26h	0:	Read only
noc	(a)				<u> </u>
ark				999:	
ũ	Readout carbon Usage	10h	27h	0:	Read only
	(kg)				
				65535 <b>:</b>	

### 7. Power control procedure

#### 7.1 Power status read

1) The controller requests the monitor to reply a current power status.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'6'	STX-'0'-'1'-'D'-'6'-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID from which you want to get status.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message Type is "Command".
  '0'-'6' (30h, 36h): Message length is 6 bytes.
Message
 STX (02h): Start of Message
  '0'-'1'-'D'-'6': Get power status command.
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor returns with the current power status.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'2'	STX-'0'-'2'-'0'-'0'-'D'-'6'-'0'-'0'-'0'	BCC	CR
	-'0'-'0'-'4'-'0'-'0'-'1'-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message Type is "Command reply".
  '1'-'2' (31h, 32h): Message length is 18 bytes.
Message
  STX(02h):Start of Message
  '0'-'2' (30h, 32h): Reserved data
  '0'-'0' (30h, 30h): Result code
                  00: No Error.
                  01: Unsupported.
  'D'-'6'(44h, 36h): Display power mode code
  '0'-'0' (30h, 30h): Parameter type code is "Set parameter".
  '0'-'0'-'4' (30h, 30h, 34h): Power mode is 4 types.
  '0'-'0'-'1' (30h, 30h, 31h): Current power mode
                                 <Status>
                                  0001: ON
                                  0002: Stand-by (power save)
                                  0003: Suspend (power save)
                                  0004: OFF (same as IR power off)
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
```

CR	(ODh):	End c	of packet			

#### 7.2 Power control

1) The controller requests the monitor to control monitor power.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'C'	STX-'C'-'2'-'0'-'3'-'D'-'6'-	BCC	CR
	'0'-'0'-'1'-ETX		

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID which you want to change a setting.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'C (30h, 43h): Message length is 12 bytes.
Message
 STX (02h): Start of Message
  'C'-'2'-'0'-'3'-'D'-'6' (43h, 32h, 30h, 33h, 44h, 36h): power control command
  '0'-'0'-'1' (30h, 30h, 30h, 31h): Power mode
                                  0001: ON
                                  0002, 0003: Do not set.
                                  0004: OFF (same as the power off by IR)
 ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Header	Message	Check ode	Delimiter
SOH-'0'-'0'-Monitor	STX-'0'-'0'-'C'-'2'-'0'-'3'-'D'-'6'-	BCC	CR
ID-'B'-'0'-'E'	'0'-'0'-'1'-ETX		

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
              Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  'N'-'N': Message length
              Note.) The maximum data length that can be written to the monitor at a time is 32bytes.
             Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (32h and 30h).
Message
  STX (02h): Start of Message
  '0'-'0' (30h, 30h): Result code. No error.
  'C'-'2','0'-'3'-'D'-'6' (43h, 32h, 30h, 33h, 44h, 36h): power control reply command
              The monitor replies same as power control command to the controller.
  '0'-'0'-'1' (30h, 30h, 31h): Power mode
                                  0001: ON
                                  0002, 0003: Do not set.
                                  0004: OFF (same as the power off by IR)
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
```

Delimiter				
CR (0Dh):	End of	packet		

## 8. Asset Data read and write

MultiSync P402 /P462 /P552 /P702 /V422 /V462 /V551 /V651 /V322 /V652 /V552 /X461S /X551S /X401S /X463UN /X551UN /V463 /V423 have the area for to store user's asset data of up to 64bytes.

## 8.1 Asset Data Read Request and reply

This command is used in order to read Asset Data.

1) The controller requests the monitor to reply with Asset data.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'A'	STX-'C'-'0'-'B'-'0'-'0'-'2'-'0'-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID from which you want to get data.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'A' (30h, 41h): Message length is 10 bytes.
Message
  STX (02h): Start of Message
  'C'-'0'-'0'-'B' (43h, 30h, 30h, 42h): Asset read request command.
  '0'-'0' (30h, 30h): Offset data from top of the Asset data.
   At first set 00h: Read data from the top of Asset data area.
  '2'-'0' (32h, 30h): Read out data length is 32bytes.
   Secondly set 20h: Read data from the 32bytes offset point in the Asset data area.
                      Maximum readout length is 32bytes at a time.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies Asset data to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-N-N	STX-'C'-'1'-'0'-'B'-	BCC	CR
	Data(0)-Data(1)Data(N)-ETX		

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply"
  N-N: Message length
             Ex.) The byte data 20h is encoded to ASCII characters '2' and '0' (32h and 30h).
              Note.) This length includes STX and ETX.
Message
 STX (02h): Start of Message
  'C'-'1'-'0'-'B' (43h, 31h, 30h, 42h): Asset read reply command
 Data(0) - Data(N): Retuned Asset data
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
```

Delimiter CR (0Dh): End of packet	
ck (ODII). Elid OI packet	

### 8.2 Asset Data write

This command is used in order to write Asset Data.

1) The controller requests the monitor to write Asset data.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-N-N	STX-'C'-'0'-'0'-'E'-'0'-'0'-	BCC	CR
	Data(0)-Data(1)Data(N)-ETX		

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID in which you want to write data.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  N-N: Message length
              Note.) The maximum data length that can be written to the monitor at a time is 32bytes.
              Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (32h and 30h).
Message
 STX (02h): Start of Message
  'C'-'0'-'0'-'E' (43h, 30h, 30h, 45h): Asset Data writes command
  '0'-'0'(30h, 30h): Offset address from top of Asset data.
     00h : Write data from top of the Asset data area.
  Data(0) -- Data(N): Asset data. The data must be ASCII characters strings.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-MonitorID-'B'-N-N	STX-'0'-'0'-'C'-'0'-'0'-'E'-'0'-'0'-	BCC	CR
	Data(0)-Data(1)Data(N)-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  N-N: Message length
              Note.) The maximum data length that can be written to the monitor at a time is 32bytes.
              Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (34h and 30h).
Message
 STX (02h): Start of Message
  '0'-'0': Result code. No error.
  'C'-'0'-'E' (43h, 30h, 30h, 45h): Asset Data write command
  '0'-'0'(30h, 30h): Offset address from top of Asset data.
     00h : Write data into from top of the Asset data area.
 Data(0) -- Data(N): Asset data. The data must be ASCII characters strings.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
```

CR	(ODh):	End c	of packet			

# 9. Date & Time read and write

### 9.1 Date & Time Read

This command is used in order to read the setting of Date & Time.

1) The controller requests the monitor to reply with the Date & Time.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor	STX-'C'-'2'-'1'-'1'-ETX	BCC	CR
ID-'0'-'A'-'0'-'6'			

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to get status.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'6'(30h, 36h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'1' (43h, 32h, 31h, 31h): Date & time read request command.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies Date & Time to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'4'	STX-'C'-'3'-'1'-'1'-YY-MM-DD-WW-HH-MN	BCC	CR
	-DS-ETX		

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller
  Monitor ID: Indicate a replying Monitor ID
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply"
  '1'-'4'(31h, 34h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'1' (43h, 33h, 31h, 31h): Date & Time read reply command
  'YY'-'MM'-'DD'-'WW'-'HH'-'MN'-'DS': Date & Time data
        YY: Year (offset 2000)
           '0'-'0'(30h, 30h): 2000
           6'-3'(36h, 33h): 2099 (99 = 63h)
       MM: Month
            '0'-'1'(30h, 31h): January
            '0'-'C'(30h, 43h): December
       DD: Day
             '0'-'1'(30h, 31h): 1
             '1'-'E'(31h, 45h): 30(=1Eh)
             '1'-'F'(31h, 46h): 31(=1Fh)
```

```
WW: weekdays
               '0'-'0'(30h, 30h): Sunday
'0'-'1'(30h, 31h): Monday
               '0'-'2'(30h, 32h): Tuesday
               '0'-'3'(30h, 33h): Wednesday
'0'-'4'(30h, 34h): Thursday
'0'-'5'(30h, 35h): Friday
               '0'-'6'(30h, 36h): Saturday
         HH: Hours
                '0'-'0'(30h, 30h): 0
                '1'-'7'(31h, 37h): 23 (=17h)
         MN: Minutes
               '0'-'0'(30h, 30h): 0
               '3'-'B' (33h, 42h): 59 (=3Bh)
         DS: Daylight saving (Summer time)
               '0'-'0'(30h, 30h): NO
'0'-'1'(30h, 31h): YES
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
        Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

### 9.2 Date & Time Write

This command is used in order to write the setting of the Date & Time.

1) The controller requests the monitor to write Date & Time.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'1'-'2'	STX-'C'-'2'-'1'-'2'-YY-MM-DD-WW-HH-MN	BCC	CR
	-DS-ETX		

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID of which you want to change the setting.
              Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '1'-'2'(31h, 32h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'2' (43h, 32h, 31h, 32h): Date & Time write command
  'YY'-'MM'-'DD'-'WW'-'HH'-'MN'-'DS': Date & Time data
       YY: Year (offset 2000)
           '0'-'0'(30h, 30h): 2000
           '6'-'3'(36h, 33h): 2099 (99 = 63h)
        MM: Month
            '0'-'1'(30h, 31h): January
             '0'-'C'(30h, 43h): December
        DD: Day
             '0'-'1'(30h, 31h): 1
             '1'-'E'(31h, 45h): 30(=1Eh)
             '1'-'F'(31h, 46h): 31(=1Fh)
        WW: weekdays
            '0'-'0'(30h, 30h): Sunday
             '0'-'1'(30h, 31h): Monday
'0'-'2'(30h, 32h): Tuesday
             '0'-'3'(30h, 33h): Wednesday
             '0'-'4'(30h, 34h): Thursday
             '0'-'5'(30h, 35h): Friday
             '0'-'6'(30h, 36h): Saturday
        HH: Hours
             '0'-'0'(30h, 30h): 0
             '1'-'7'(31h, 37h): 23 (=17h)
        MN: Minutes
             '0'-'0'(30h, 30h): 0
            '3'-'B' (33h, 42h): 59 (=3Bh)
        DS: Daylight saving (Summer time)
             '0'-'0'(30h, 30h): NO
             '0'-'1'(30h, 31h): YES
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'6'	STX-'C'-'3'-'1'-'2'-ST-YY-MM-DD-WW-HH-MN	BCC	CR
	-DS-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
              Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '1'-'6'(31h, 36h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'2' (43h, 33h, 31h, 32h): Date & Time write reply command
  ST: Date & Time Status command
        '0'-'0'(30h, 30h): No error
        '0'-'1'(30h, 31h): Error
  'YY'-'MM'-'DD'-'WW'-'HH'-'MN'-'DS': Date & Time data
        YY: Year (offset 2000)
            '0'-'0'(30h, 30h): 2000
            '6'-'3'(36h, 33h): 2099 (99 = 63h)
        MM: Month
            '0'-'1'(30h, 31h): January
             '0'-'C'(30h, 43h): December
        DD: Day
             '0'-'1'(30h, 31h): 1
             '1'-'E'(31h, 45h): 30(=1Eh)
             '1'-'F'(31h, 46h): 31(=1Fh)
        WW: weekdays
             '0'-'0'(30h, 30h): Sunday
             '0'-'1'(30h, 31h): Monday
             '0'-'2'(30h, 32h): Tuesday
             '0'-'3'(30h, 33h): Wednesday
'0'-'4'(30h, 34h): Thursday
'0'-'5'(30h, 35h): Friday
             '0'-'6'(30h, 36h): Saturday
        HH: Hours
             '0'-'0'(30h, 30h): 0
             '1'-'7'(31h, 37h): 23 (=17h)
        MN: Minutes
             '0'-'0'(30h, 30h): 0
             '3'-'B' (33h, 42h): 59 (=3Bh)
        DS: Daylight saving (Summer time)
             '0'-'0'(30h, 30h): NO
             '0'-'1'(30h, 31h): YES
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
```

Delimiter		
CR (0Dh): End of packet		

## 10. Schedule read and write

## 10.1 Schedule Read

This command is used in order to read the setting of the Schedule.

1) The controller requests the monitor to read Schedule.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'8'	STX-'C'-'2'-'2'-'1'-PG-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to get status.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'8'(30h, 38h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1' (43h, 32h, 32h, 31h): Schedule read request command.
  PG: Program No.
           The data must be ASCII characters strings.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies Schedule to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'2'-'6'	STX-'C'-'3'-'2'-'1'-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-P MODE-		
	EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7-ETX		ļ

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  ^{\circ}0^{\circ} (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
              Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '2'-'6'(32h, 36h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'2'-'1' (43h, 33h, 32h, 31h): Schedule read reply command
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL-P MODE-
  EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7: Schedule data
        PG: Program No.
             '0'-'0'(30h, 30h): Program No.1
             '0'-'6'(30h, 36h): Program No.7
        ON_HOUR: Turn on time (hour)
             '0'-'0'(30h, 30h): 00
             '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
```

```
'3'-'B'(33h, 42h): 59
    '3'-'C'(33h, 43h): On timer isn't set.
OFF_HOUR: Turn off time (hour)
    '0'-'0'(30h, 30h): 00
    '1'-'7'(31h, 37h): 23 (=17h)
    '1'-'8'(31h, 38h): Off timer isn't set.
OFF MIN: Turn off time (minute)
    '0'-'0'(30h, 30h): 0
    '3'-'B'(33h, 42h): 59 (=3Bh)
    '3'-'C'(33h, 43h): Off timer isn't set.
INPUT: Timer input
    '0'-'0'(30h,30h): No mean (works on last memory)
    '0'-'1'(30h,31h): VGA
    '0'-'2'(30h,32h): RGB/HV
    '0'-'3'(30h,33h): DVI
    '0'-'5'(30h,35h): Video1
    '0'-'6'(30h,36h): Video2
    '0'-'7'(30h,37h): S-Video
    '0'-'A'(30h,41h): TV
    '0'-'C'(30h,43h): DVD/HD1
    '0'-'D'(30h,44h): Option
    '0'-'E'(30h,45h): DVD/HD2
    '0'-'F'(30h,46h): Display Port
    '1'-'1'(31h,31h): HDMI
WD: Week setting
    bit 0: Monday
    bit 1: Tuesday
    bit 2: Wednesday
    bit 3: Thursday
    bit 4: Friday
    bit 5: Saturday
    bit 6: Sunday
    EX.
    '0'-'1'(30h, 31h): Monday
    '0'-'4'(30h, 34h): Wednesday
    '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
    '7'-'F'(37h, 46h): Monday to Sunday
FL: Option
    bit 0: 0:once 1:Everyday
    bit 1: 0:once 1:Every week
    bit 2: 0:Disable 1:Enable
    '0'-'1'(30h, 31h): Disable, Everyday
    '0'-'4'(30h, 34h): Enable, once
P MODE: Picture mode
    '0'-'0'(30h,30h): No mean (works on last memory)
    '0'-'1'(30h,31h): sRGB
    '0'-'3'(30h,33h): Hi-Bright
    '0'-'4'(30h,34h): Standard
    '0'-'5'(30h,34h): Cinema
    '0'-'6'(30h,36h): ISF-Day
    '0'-'7'(30h,37h): ISF-Night
    '0'-'B'(30h,42h): Ambient-1
    '0'-'C'(30h,43h): Ambient-2
EXT1: Extension1
     '0'-'0'(30h,30h): (On this monitor, it is always '00')
EXT2: Extension 2
```

```
'0'-'0'(30h,30h): (On this monitor, it is always '00')
        EXT3: Extension 3
             '0'-'0'(30h,30h): (On this monitor, it is always '00')
        EXT4: Extension 4
             '0'-'0'(30h,30h): (On this monitor, it is always '00')
        EXT5: Extension 5
             \mbox{'0'-'0'}(30h,30h)\mbox{:} (On this monitor, it is always \mbox{`00'}\mbox{)}
        EXT6: Extension 6
             '0'-'0'(30h,30h): (On this monitor, it is always '00')
        EXT7: Extension 7
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
 ETX (03h): End of Message
Check code
 BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
 CR (0Dh): End of packet
```

\*\*\*Following command also can be used for to keep backward compatibility, in order to read the setting of the Schedule.

1) The controller requests the monitor to read Schedule.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'8'	STX-'C'-'2'-'1'-'3'-PG-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to get status.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'8'(30h, 38h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'3' (43h, 32h, 31h, 33h): Schedule read request command.
  PG: Program No.
       > The data must be ASCII characters strings.
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies Schedule to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'6'	STX-'C'-'3'-'1'-'3'-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-ETX		

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '1'-'6'(31h, 36h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'3' (43h, 33h, 31h, 33h): Schedule read reply command
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL: Schedule data
       PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        ON HOUR: Turn on time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON_MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59
            '3'-'C'(33h, 43h): On timer isn't set.
```

```
OFF HOUR: Turn off time (hour)
             '0'-'0'(30h, 30h): 00
              '1'-'7'(31h, 37h): 23 (=17h)
             '1'-'8'(31h, 38h): Off timer isn't set.
        OFF_MIN: Turn off time (minute)
             '0'-'0'(30h, 30h): 0
             '3'-'B'(33h, 42h): 59 (=3Bh)
             '3'-'C'(33h, 43h): Off timer isn't set.
        INPUT: Timer input
             '0'-'0'(30h, 30h): DVI
             '0'-'1'(30h, 31h): VGA
             '0'-'2'(30h, 32h): RGB/HV
'0'-'3'(30h, 33h): DVD/HD1
'0'-'4'(30h, 34h): VIDEO
             '0'-'5'(30h, 35h): S-VIDEO
             '0'-'7'(30h,30h): No mean (Works on last memory)
        WD: Week setting
             bit 0: Monday
             bit 1: Tuesday
             bit 2: Wednesday
             bit 3: Thursday
             bit 4: Friday
             bit 5: Saturday
             bit 6: Sunday
             EX.
             '0'-'1'(30h, 31h): Monday
             '0'-'4'(30h, 34h): Wednesday
             '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
             '7'-'F'(37h, 46h): Monday to Sunday
        FL: Option
             bit 0: 0:once 1:Everyday
             bit 1: 0:once 1:Every week
             bit 2: 0:Disable 1:Enable
             '0'-'1'(30h, 31h): Disable, Everyday '0'-'4'(30h, 34h): Enable, once
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

### 10.2 Schedule Write

This command is used in order to write the setting of the Schedule.

1) The controller requests the monitor to write Schedule.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'2'-'6'	STX-'C'-'2'-'2'-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-P MODE-		
	EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to change a setting.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '2'-'6'(32h, 36h): Message length.
Message
  STX (02h): Start of Message
  'C'-'2'-'2'-'2' (43h, 32h, 32h, 32h): Schedule writes command
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL-P MODE
  EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7: Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        ON_HOUR: Turn on time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59
            '3'-'C'(33h, 43h): On timer isn't set.
        OFF_HOUR: Turn off time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): Off timer isn't set.
        OFF_MIN: Turn off time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59 (=3Bh)
            '3'-'C'(33h, 43h): Off timer isn't set.
        INPUT: Timer input
            '0'-'0'(30h,30h): No mean (works on last memory)
            '0'-'1'(30h,31h): VGA
            '0'-'2'(30h,32h): RGB/HV
            '0'-'3'(30h,33h): DVI
            '0'-'4'(30h,34h): HDMI (Set only)
            '0'-'5'(30h,35h): Video1
            '0'-'6'(30h,36h): Video2
            '0'-'7'(30h,37h): S-Video
            '0'-'A'(30h,41h): TV
            '0'-'C'(30h,43h): DVD/HD1
            '0'-'D'(30h,44h): Option
            '0'-'E'(30h,45h): DVD/HD2
            '0'-'F'(30h,46h): Display Port
```

```
'1'-'1'(31h,31h): HDMI
            * Please select active input on your system (setting).
            * If you select inactive input here, the input change execution will be ignored.
       WD: Week setting
            bit 0: Monday
            bit 1: Tuesday
            bit 2: Wednesday
            bit 3: Thursday
            bit 4: Friday
            bit 5: Saturday
            bit 6: Sunday
            '0'-'1'(30h, 31h): Monday
            '0'-'4'(30h, 34h): Wednesday
            '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
            '7'-'F'(37h, 46h): Monday to Sunday
        FL: Option
            bit 0: 0:once 1:Everyday
            bit 1: 0:once 1:Every week
            bit 2: 0:Disable 1:Enable
             * When bit 0 and bit 1 are '1', it behaves as Everyday.
            '0'-'1'(30h, 31h): Disable, Everyday
            '0'-'4'(30h, 34h): Enable, once
       P MODE: Picture mode
            '0'-'0'(30h,30h): No mean (Works on last memory)
            '0'-'1'(30h,31h): sRGB
            '0'-'3'(30h,33h): Hi-Bright
            '0'-'4'(30h,34h): Standard
            '0'-'5'(30h,34h): Cinema
            '0'-'6'(30h,36h): ISF-Day
            '0'-'7'(30h,37h): ISF-Night
            '0'-'B'(30h,42h): Ambient-1
            '0'-'C'(30h,43h): Ambient-2
            * Please select active picture mode on your system (setting).
            * If you select inactive picture mode here, the input change execution will be ignored.
       EXT1: Extension1
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT2: Extension 2
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT3: Extension 3
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT4: Extension 4
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT5: Extension 5
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT6: Extension 6
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
        EXT7: Extension 7
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'2'-'8'	STX-'C'-'3'-'2'-'2'-ST-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-P MODE-		
	EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '2'-'8'(32h, 38h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'2'-'2' (43h, 33h, 32h, 32h): Schedule writes reply command
  ST: Schedule Status command
        '0'-'0'(30h, 30h): No error
        '0'-'1'(30h, 31h): Error
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL-P MODE
  EXT1-EXT2-EXT3-EXT4-EXT5-EXT6-EXT7: Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        ON HOUR: Turn on time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59
            '3'-'C'(33h, 43h): On timer isn't set.
        OFF HOUR: Turn off time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): Off timer isn't set.
        OFF_MIN: Turn off time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59 (=3Bh)
            '3'-'C'(33h, 43h): Off timer isn't set.
        INPUT: Timer input
            '0'-'0'(30h,30h): No mean (works on last memory)
            '0'-'1'(30h,31h): VGA
            '0'-'2'(30h,32h): RGB/HV
            '0'-'3'(30h,33h): DVI
            '0'-'5'(30h,35h): Video1
            '0'-'6'(30h,36h): Video2
            '0'-'7'(30h,37h): S-Video
            '0'-'A'(30h,41h): TV
            '0'-'C'(30h,43h): DVD/HD1
            '0'-'D'(30h,44h): Option
            '0'-'E'(30h,45h): DVD/HD2
            '0'-'F'(30h,46h): Display Port
            '1'-'1'(31h,31h): HDMI
```

```
bit 0: Monday
            bit 1: Tuesday
            bit 2: Wednesday
            bit 3: Thursday
            bit 4: Friday
            bit 5: Saturday
            bit 6: Sunday
            EX.
            '0'-'1'(30h, 31h): Monday
            '0'-'4'(30h, 34h): Wednesday
            '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
            '7'-'F'(37h, 46h): Monday to Sunday
        FL: Option
            bit 0: 0:once 1:Everyday
            bit 1: 0:once 1:Every week
            bit 2: 0:Disable 1:Enable
            * When bit 0 and bit 1 are '1', it behaves as Everyday.
            '0'-'1'(30h, 31h): Disable, Everyday
            '0'-'4'(30h, 34h): Enable, once
       P MODE: Picture mode
            '0'-'0'(30h,30h): No mean (works on last memory)
            '0'-'1'(30h,31h): sRGB
            '0'-'3'(30h,33h): Hi-Bright
            '0'-'4'(30h,34h): Standard
            '0'-'5'(30h,34h): Cinema
            '0'-'6'(30h,36h): ISF-Day
            '0'-'7'(30h,37h): ISF-Night
            '0'-'B'(30h,42h): Ambient-1
            '0'-'C'(30h,43h): Ambient-2
       EXT1: Extension1
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT2: Extension 2
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT3: Extension 3
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT4: Extension 4
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT5: Extension 5
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT6: Extension 6
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
       EXT7: Extension 7
            '0'-'0'(30h,30h): (On this monitor, it is always '00')
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
3) The controller requests the monitor to write Enable/Disable Schedule.
```

WD: Week setting

```
Header Message Check code Delimiter
SOH-'0'-MonitorID-'0'-'A'-'0'-'A' STX-'C'-'2'-'1'-'5'-PG-EN-ETX BCC CR
```

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to change a setting.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'A'(30h, 41h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'5' (43h, 32h, 31h, 35h): Enable/Disable Schedule writes command
  PG-EN: Enable/Disable Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        EN: Enable /Disable
            '0'-'0'(30h, 30h): Disable
            '0'-'1'(30h, 31h): Enable
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'0'-'C'	STX-'C'-'3'-'1'-'5'-ST-PG-EN-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '0'-'C' (30h, 43h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'5' (43h, 33h, 31h, 35h): Enable/Disable Schedule writes reply command
  ST: Enable/Disable Schedule Status command
        '0'-'0'(30h, 30h): No error
        '0'-'1'(30h, 31h): Error
  PG-EN: Enable/Disable Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
  EN: Enable /Disable
            '0'-'0'(30h, 30h): Disable
            '0'-'1'(30h, 31h): Enable
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
```

Delimiter CR (0Dh): End of packet	
ck (ODII). Elid OI packet	

\*\*\*Following command also can be used for to keep backward compatibility, in order to write the setting of the Schedule.

1) The controller requests the monitor to write Schedule.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'1'-'6'	STX-'C'-'2'-'1'-'4'-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to change a setting.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '1'-'6'(31h, 36h): Message length.
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'4' (43h, 32h, 31h, 34h): Schedule writes command
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL: Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        ON HOUR: Turn on time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59
            '3'-'C'(33h, 43h): On timer isn't set.
        OFF HOUR: Turn off time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): Off timer isn't set.
        OFF_MIN: Turn off time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59 (=3Bh)
            '3'-'C'(33h, 43h): Off timer isn't set.
        INPUT: Timer input
            '0'-'0'(30h, 30h): DVI
            '0'-'1'(30h, 31h): VGA
            '0'-'2'(30h, 32h): RGB/HV
            '0'-'3'(30h, 33h): DVD/HD1
            '0'-'4'(30h, 34h): VIDEO
            '0'-'5'(30h, 35h): S-VIDEO
            '0'-'7'(30h, 37h): (Works on last memory)
            * Please select active input on your system (setting).
            * If you select inactive input here, the input change execution will be ignored.
        WD: Week setting
            bit 0: Monday
            bit 1: Tuesday
            bit 2: Wednesday
```

```
bit 3: Thursday
            bit 4: Friday
            bit 5: Saturday
            bit 6: Sunday
            EX.
            '0'-'1'(30h, 31h): Monday
            '0'-'4'(30h, 34h): Wednesday
            '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
            '7'-'F'(37h, 46h): Monday to Sunday
        FL: Option
            bit 0: 0:once 1:Everyday
            bit 1: 0:once 1:Every week
            bit 2: 0:Disable 1:Enable
             * When bit 0 and bit 1 are '1', it behaves as Everyday.
            EX.
            '0'-'1'(30h, 31h): Disable, Everyday
            '0'-'4'(30h, 34h): Enable, once
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'8'	STX-'C'-'3'-'1'-'4'-ST-PG-ON HOUR-ON MIN-	BCC	CR
	OFF HOUR-OFF MIN-INPUT-WD-FL-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '1'-'8'(31h, 38h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'4' (43h, 33h, 31h, 34h): Schedule writes reply command
  ST: Schedule Status command
        '0'-'0'(30h, 30h): No error
        '0'-'1'(30h, 31h): Error
  PG-ON HOURS-ON MIN-OFF HOURS-OFF MIN-INPUT-WD-FL: Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
        ON_HOUR: Turn on time (hour)
            '0'-'0'(30h, 30h): 00
            '1'-'7'(31h, 37h): 23 (=17h)
            '1'-'8'(31h, 38h): ON timer isn't set.
        ON MIN: Turn on time (minute)
            '0'-'0'(30h, 30h): 0
            '3'-'B'(33h, 42h): 59
            '3'-'C'(33h, 43h): On timer isn't set.
        OFF_HOUR: Turn off time (hour)
```

```
'0'-'0'(30h, 30h): 00
             '1'-'7'(31h, 37h): 23 (=17h)
             '1'-'8'(31h, 38h): Off timer isn't set.
        OFF MIN: Turn off time (minute)
             '0'-'0'(30h, 30h): 0
             '3'-'B'(33h, 42h): 59 (=3Bh)
             '3'-'C'(33h, 43h): Off timer isn't set.
        INPUT: Timer input
             '0'-'0'(30h, 30h): DVI
             '0'-'1'(30h, 31h): VGA
             '0'-'2'(30h, 32h): RGB/HV
             '0'-'3'(30h, 33h): DVD/HD1
             '0'-'4'(30h, 34h): VIDEO
'0'-'5'(30h, 35h): S-VIDEO
             '0'-'7'(30h,30h): No mean (Works on last memory)
        WD: Week setting
            bit 0: Monday
            bit 1: Tuesday
            bit 2: Wednesday
            bit 3: Thursday
            bit 4: Friday
            bit 5: Saturday
            bit 6: Sunday
            '0'-'1'(30h, 31h): Monday
             '0'-'4'(30h, 34h): Wednesday
             '0'-'F'(30h, 46h): Monday, Tuesday, Wednesday and Thursday
             '7'-'F'(37h, 46h): Monday to Sunday
        FL: Option
            bit 0: 0:once 1:Everyday
            bit 1: 0:once 1:Every week
            bit 2: 0:Disable 1:Enable
             * When bit 0 and bit 1 are '1', it behaves as Everyday.
             '0'-'1'(30h, 31h): Disable, Everyday
             '0'-'4'(30h, 34h): Enable, once
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

3) The controller requests the monitor to write Enable/Disable Schedule.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'A'	STX-'C'-'2'-'1'-'5'-PG-EN-ETX	BCC	CR

```
Header

SOH (01h): Start Of Header
'0' (30h): Reserved

Monitor ID: Specify the Monitor ID of which you want to change a setting.

Ex.) If Monitor ID is '1', specify 'A'.
'0' (30h): Message sender is the controller.
'A' (41h): Message type is "Command".
'0'-'A'(30h, 41h): Message length

Message

STX (02h): Start of Message
```

```
'C'-'2'-'1'-'5' (43h, 32h, 31h, 35h): Enable/Disable Schedule writes command
PG-EN: Enable/Disable Schedule data
PG: Program No.
'0'-'0'(30h, 30h): Program No.1
'0'-'6'(30h, 36h): Program No.7

EN: Enable /Disable
'0'-'0'(30h, 30h): Disable
'0'-'1'(30h, 31h): Enable

ETX (03h): End of Message

Check code
BCC: Block Check Code
Refer to the section 4.5 "Check code" for a BCC calculation.

Delimiter
CR (0Dh): End of packet
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'0'-'C'	STX-'C'-'3'-'1'-'5'-ST-PG-EN-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '0'-'C' (30h, 43h): Message length
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'5' (43h, 33h, 31h, 35h): Enable/Disable Schedule writes reply command
  ST: Enable/Disable Schedule Status command
        '0'-'0'(30h, 30h): No error
        '0'-'1'(30h, 31h): Error
  PG-EN: Enable/Disable Schedule data
        PG: Program No.
            '0'-'0'(30h, 30h): Program No.1
            '0'-'6'(30h, 36h): Program No.7
  EN: Enable /Disable
            '0'-'0'(30h, 30h): Disable
            '0'-'1'(30h, 31h): Enable
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

# 11. Self diagnosis

# 11.1 Self-diagnosis status read

This command is used in order to read the Self-diagnosis status.

1) The controller requests the monitor to read Self-diagnosis status.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'4'	STX-'B'-'1'-ETX	BCC	CR

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID which you want to get status.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'4'(30h, 34h): Message length
Message
  STX (02h): Start of Message
  'B'-'1' (42h, 31h): Self-diagnosis command
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies a result of the self-diagnosis.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-N-N	STX-'A'-'1'-	BCC	CR
	ST(0)-ST(1)ST(n)-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
              Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  N-N: Message length
              Note.) The maximum data length that can be written to the monitor at a time is 32bytes.
              Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (34h and 30h).
Message
  STX (02h): Start of Message
  'A'-'1' (41h, 31h): Application Test Report reply command
  ST: Result of self-tests
        '0'-'0'(30h, 30h):00: Normal
        '7'-'0'(37h, 30h):70: Standby-power +3.3V abnormality
        '7'-'1'(37h, 31h):71: Standby-power +5V abnormality
        '7'-'2'(37h, 32h):72: Panel-power +12V abnormality
        '7'-'8'(37h, 38h):78: Inverter power/Option slot2 power +24V Abnormality
        '8'-'0'(38h, 30h):80: Cooling fan-1 abnormality
        '8'-'1'(38h, 31h):81: Cooling fan-2 abnormality
         ('8'-'2'(38h, 32h):82: Cooling fan-3 abnormality)
        '9'-'0'(39h, 30h):90: Inverter abnormality
        '9'-'1'(39h, 31h):91: LED Backlight abnormality
        'A'-'0'(41h, 30h):A0: Temperature abnormality - shutdown 'A'-'1'(41h, 31h):A1: Temperature abnormality - half brightness
        'A'-'2'(41h, 32h):A2: SENSOR reached at the temperature that the user had specified.
        'B'-'0'(42h, 30h):B0: No signal
        'C'-'0'(43h, 30h):C0: Option board abnormality
```

ETX (03h): End of Message

Check code

BCC: Block Check Code

Refer to the section 4.5 "Check code" for a BCC calculation.

Delimiter

CR (0Dh): End of packet

## 12. Serial No. & Model Name Read

### 12.1 Serial No. Read

This command is used in order to read a serial number.

1) The controller requests the monitor to read a serial number.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'6'	STX-'C'-'2'-'1'-'6'-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID which you want to get serial number.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'6'(30h, 36h): Message length
Message
  STX (02h): Start of Message
    'C'-'2'-'1'-'6' (43h, 32h, 31h, 36h): Serial No. command
ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

2) The monitor replies the serial No. data to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-N-N	STX-'C'-'3'-'1'-'6'-	BCC	CR
	Data(0)-Data(1)Data(n)-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
'B' (42h): Message type is "Command reply".
N-N: Message length
             Note.) The maximum data length that can be returned from the monitor at a time is
                     32bytes.
              Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (32h and 30h).
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'6' (41h, 33h, 31h, 36h): Serial No. reply command
  Data(0)-Data(1)----Data(n):Serial Number
          These data are encoded to ASCII characters strings.
ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

### 12.2 Model Name Read

This command is used in order to read the Model Name.

1) The controller requests the monitor to read Model Name.

```
Header Message Check code Delimiter
SOH-'0'-MonitorID-'0'-'A'-'0'-'6' STX-'C'-'2'-'1'-'7'-ETX BCC CR
```

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID which you want to get Model Name.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'6'(30h, 36h): Message length
Message
  STX (02h): Start of Message
    'C'-'2'-'1'-'7' (43h, 32h, 31h, 37h): Model Name command
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
 CR (0Dh): End of packet
```

2) The monitor replies the model name data to the controller.

Header Message		Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-N-N	STX-'C'-'3'-'1'-'7'-Data(0) -Data(1)	BCC	CR
	-Data(n)-ETX		

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
             Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  N-N: Message length
             Note.) The maximum data length that can be returned from the monitor at a time is
              Ex.) The byte data 20h is encoded as ASCII characters '2' and '0' (32h and 30h).
Message
  STX (02h): Start of Message
  'C'-'3'-'1'-'7' (43h, 33h, 31h, 37h): Model Name reply Command
  Data(0) -Data(1)----Data(n):Model name
          These data are encoded to ASCII characters strings.
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

# 13. Security Lock

## 13.1 Security Lock Control

This command sets the condition of security lock function to "LOCK" or "UNLOCK".

If security pass codes 1st to 4th are matched with monitor resisted pass codes, then this command is executed, and reply no error status and a new condition.

If codes aren't matched with them then setting isn't changed, and reply error status and a current condition.

If the monitor receives this command while waiting for Pass codes inputs, then it only checks Pass cords (and releases image muting if Pass codes are OK) and doesn't apply "EN" parameter.

1) The controller requests the monitor to set the condition of security lock.

, 1	1		
Header	Message	Check	Delimiter
		code	
SOH-'0'-MonitorID-'0'-'A'-'1'-'0'	STX-'C'-'2'-'1'-'D'-EN-P1-P2-P3-P4-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID of which you want to change a setting.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '1'-'0'(31h, 30h): Message length
Message
  STX (02h): Start of Message
  'C'-'2'-'1'-'D' (43h, 32h, 31h, 44h): Security Lock Control command
  EN-P1-P2-P3-P4: Lock condition control data
        EN: Enable /Disable
            '0'-'0'(30h, 30h): Disable
            '0'-'1'(30h, 31h): Enable
        P1: Security Pass code 1st
            '0'-'0'(30h, 30h): "0"
            '0'-'9'(30h, 39h): "9"
        P2: Security Pass code 2nd
            '0'-'0'(30h, 30h): "0"
            '0'-'9'(30h, 39h): "9"
        P3: Security Pass code 3rd
            '0'-'0'(30h, 30h): "0"
            '0'-'9'(30h, 39h): "9"
        P4: Security Pass code 4th
            '0'-'0'(30h, 30h): "0"
            '0'-'9'(30h, 39h): "9"
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
2) The monitor replies the result to the controller.
```

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'0'-'A'	STX-'C'-'3'-'1'-'D'-ST-EN-ETX	BCC	CR

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
'0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
              Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '0'-'A'(30h, 41h): Message length
Message
 STX (02h): Start of Message 'C'-'3'-'1'-'D' (43h, 33h, 31h, 44h): Security Lock Control reply command
  ST-EN: Lock condition result data
        ST: Status
             '0'-'0'(30h, 30h): No error
             '0'-'1'(30h, 31h): Error
        EN: Enable /Disable (Current condition)
             '0'-'0'(30h, 30h): Disable
             '0'-'1'(30h, 31h): Enable
  ETX (03h): End of Message
Check code
 BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
  CR (0Dh): End of packet
```

## 14. Direct TV Chanel Read & Write

When DTV unit (Option unit) is installed, channel setting 8 is read and write directly.

### 14.1 Direct TV Chanel Read & Reply

1) The controller requests the monitor to read channel information.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'0'-'6'	STX-'C'-'2'-'2'-'C'-ETX	BCC	CR

```
Header
  SOH (01h): Start Of Header
  '0' (30h): Reserved
  Monitor ID: Specify the Monitor ID which you want to get Model Name.
             Ex.) If Monitor ID is '1', specify 'A'.
  '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '0'-'6'(30h, 36h): Message length
Message
  STX (02h): Start of Message
    'C'-'2'-'2'-'C' (43h, 32h, 32h, 43h): Direct TV Channel Read command
  ETX (03h): End of Message
Check code
  BCC: Block Check Code
       Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
CR (0Dh): End of packet
```

2) The monitor replies the result to the controller.

ĺ	Header	Message	Check code	Delimiter
ſ	SOH-'0'-'0'-Monitor ID-'B'-'1'-'2'	STX-'C'-'3'-'2'-'C'-MajorCH-MinorCH-ETX	BCC	CR

```
Header
  SOH (01h): Start of Header
  '0' (30h): Reserved
  '0' (30h): Message receiver is the controller.
  Monitor ID: Indicate a replying Monitor ID.
            Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '1'-'2'(31h, 32h): Message length = 18bytes
Message
  STX (02h): Start of Message
  'C'-'3'-'2'-'C' (43h, 33h, 32h, 43h): Direct TV Channel read reply command
  MajorCH: Major Channel (00000000h - FFFFFFFFh),
           MinorCH: Minor Channel (0000h - FFFFh),
           "0"-"0"-"0"-"0" \sim "F"-"F"-"F"-"F"
 ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
 CR (0Dh): End of packet
```

## 14.2 Direct TV Chanel Write & Reply

1) The controller requests the monitor to write channel information.

Header	Message	Check code	Delimiter
SOH-'0'-Monitor ID-'0'-'A'-'1'-'2'	STX-'C'-'2'-'2'-'D'-MajorCH-MinorCH-ETX	BCC	CR

```
Header
 SOH (01h): Start Of Header
  '0' (30h): Reserved
 Monitor ID: Specify the Monitor ID which you want to get Model Name.
            Ex.) If Monitor ID is '1', specify 'A'.
 '0' (30h): Message sender is the controller.
  'A' (41h): Message type is "Command".
  '1'-'2'(31h, 32h): Message length = 18bytes
Message
 STX (02h): Start of Message
    'C'-'2'-'2'-'D' (43h, 32h, 32h, 44h): Direct TV Channel write command
 MajorCH: Major Channel (00000000h - FFFFFFFFh),
           MinorCH: Minor Channel (0000h - FFFFh),
           '0'-'0'-'0'-'0' \sim 'F'-'F'-'F'
 ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
CR (0Dh): End of packet
```

2) The monitor replies the result to the controller.

Header	Message	Check code	Delimiter
SOH-'0'-'0'-Monitor ID-'B'-'1'-'2'	STX-'C'-'3'-'2'-'D'-MajorCH-MinorCH-ETX	BCC	CR

```
Header
 SOH (01h): Start of Header
 '0' (30h): Reserved
 '0' (30h): Message receiver is the controller.
 Monitor ID: Indicate a replying Monitor ID.
            Ex.) When this byte is set to 'A', the replying Monitor ID is '1'.
  'B' (42h): Message type is "Command reply".
  '1'-'2'(31h, 32h): Message length = 18bytes
Message
 STX (02h): Start of Message
 'C'-'3'-'2'-'D' (43h, 33h, 32h, 43h): Direct TV Channel write reply command
 MajorCH: Major Channel (00000000h - FFFFFFFFh),
           MinorCH: Minor Channel (0000h - FFFFh),
           '0'-'0'-'0'-'0' \sim 'F'-'F'-'F'
 ETX (03h): End of Message
Check code
 BCC: Block Check Code
      Refer to the section 4.5 "Check code" for a BCC calculation.
Delimiter
 CR (0Dh): End of packet
```

All	data	are	subject	to	change	without	notice.		
								(December. 25, 2012)	

This document provides the technical information for users. NEC Display Solutions, Ltd. reserves the right to change or modify the information contained herein without notice. NEC Display Solutions, Ltd. makes no warranty for the use of its products and bears no responsibility for any errors or omissions which

Copyright 2004-2012 NEC Display Solutions, Ltd. All Right Reserved

may appear in this document.