

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Henrique


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-28033000-SE

Link kbps
256k/128k

Plataforma
VSAT

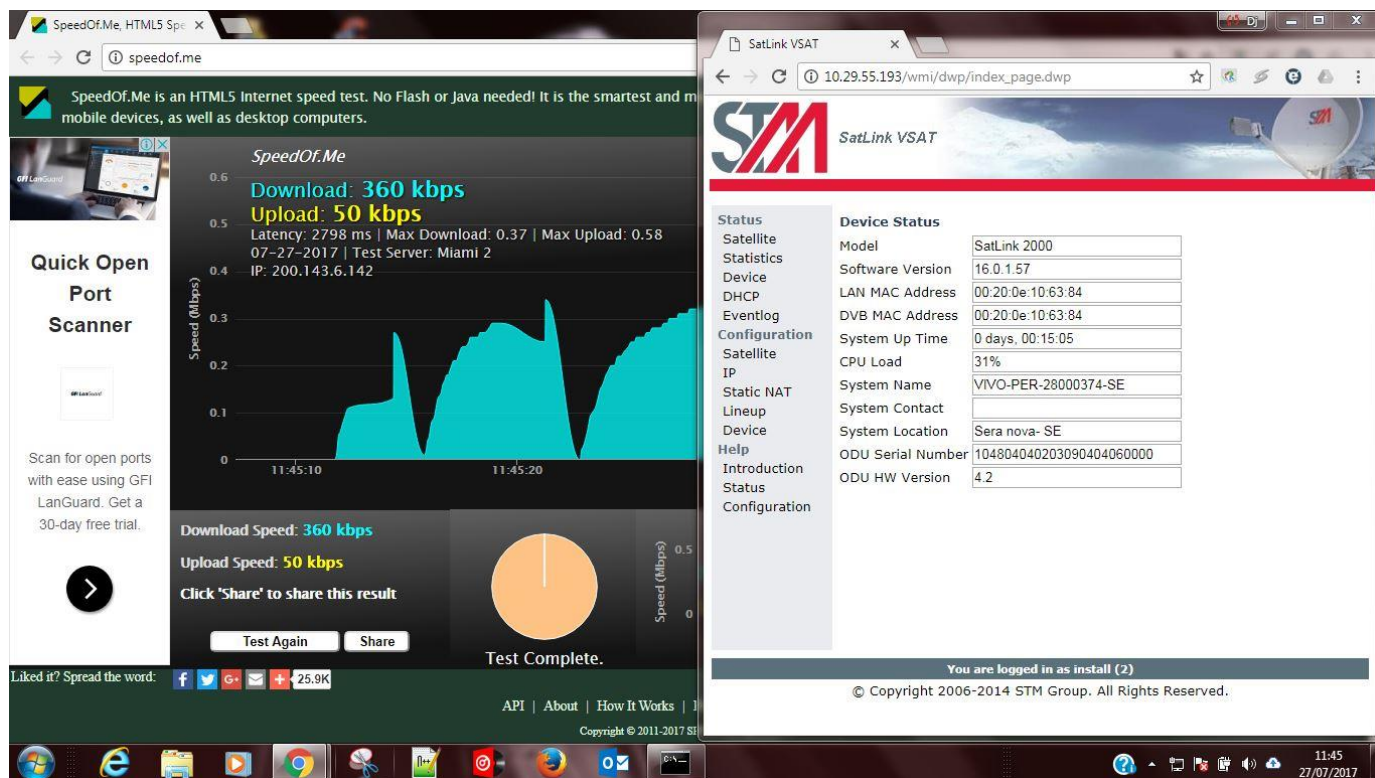

SatLink 2000
- Main board ID 120026, Revision R6.2
- SW ID 120208, Revision 16.0.1 Build 57
#

Satellite <DUB> TX Configuration

Auto start : Enabled
IDU Output Power : -20 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status

State : On <DUB-RCS2>
IDU Output Power : -18.4 dBm
ODU Output Power : 32.6 dBm
EIRP : 45.9 dBW
Es/No : 13.0 dB
Header Compression : Disabled
Timing correction : -52 us <250829 us>
Frequency correction: -90 Hz
#

Satellite <DUB> RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
		Enable						
* 0	0	25.333333	12.050000	DUB-S2	102	0	0.0 E	
		Yes						
1	1	30.000000	12.050000	DUB-S2	102	0	0.0 E	
		Yes						

Satellite <DUB> Receiver Status

Rx State : On
DUB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049942 GHz
Symbol Rate : 25.333159 Mbps
S2 ModCod
- receiving : 20 16APSK-4/5
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 13.7 dB

```
C:\Windows\system32\CMD.exe

Resposta de 8.8.8.8: bytes=32 tempo=1122ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=707ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1141ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=685ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1137ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1795ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=703ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=766ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1529ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1137ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=711ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1882ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2061ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=614ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2002ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=833ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1597ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2476ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2427ms TTL=44
Esgotado o tempo limite do pedido.
Resposta de 8.8.8.8: bytes=32 tempo=662ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=784ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2448ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=803ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2218ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1757ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2166ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2154ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=667ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1107ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=709ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1520ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=2148ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 49, Recebidos = 47, Perdidos = 2 (4% de
perda)
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 614ms, Máximo = 2801ms, Média = 1388ms
Control-C
C
C:\Users\DjTornados>arp -a

Interface: 10.29.55.194 --- 0xb
Endereço IP      Endereço físico      Tipo
10.29.55.193      00-20-0e-10-63-84    dinâmico
10.29.55.199      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
224.0.1.60        01-00-5e-00-01-3c    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\DjTornados>
```

SatLink VSAT

10.29.55.193/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

Device

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:63:84

00:20:0e:10:63:84

0 days, 00:15:05

31%

VIVO-PER-28000374-SE

Sera nova- SE

104804040203090404060000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.