


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-23125489-MG256/128VSAT

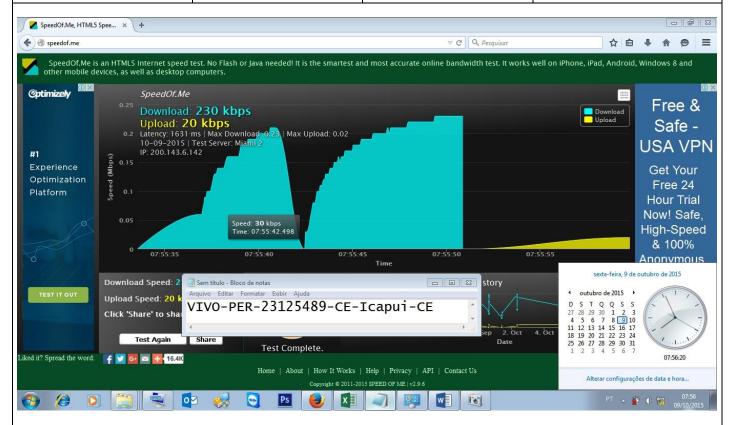

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable

* 0 0 9.320000 12.055825 DVB-S2 4 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency: 12.055604 GHz Symbol Rate: 9.319991 Msps

S2 ModCod

- receiving : 14 8PSK-3/4 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25
SNR : 14.6 dB
Input Power : -25 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -15 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 33.9 dBm

EIRP : 47.2 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -21.7 dBm
ODU Output Power : 33.9 dBm

EIRP : 47.2 dBW Eb/No : 14.0 dB

Header Compression: Disabled Timing correction: -64 us (261430 us)

Frequency correction: -360 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=1780 ms 64 bytes from 8.8.8.8: time=580 ms 64 bytes from 8.8.8.8: time=540 ms 64 bytes from 8.8.8.8: time=570 ms 64 bytes from 8.8.8.8: time=890 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 540/870/1780 ms