


## TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-31082465-MG256k/128kVSAT

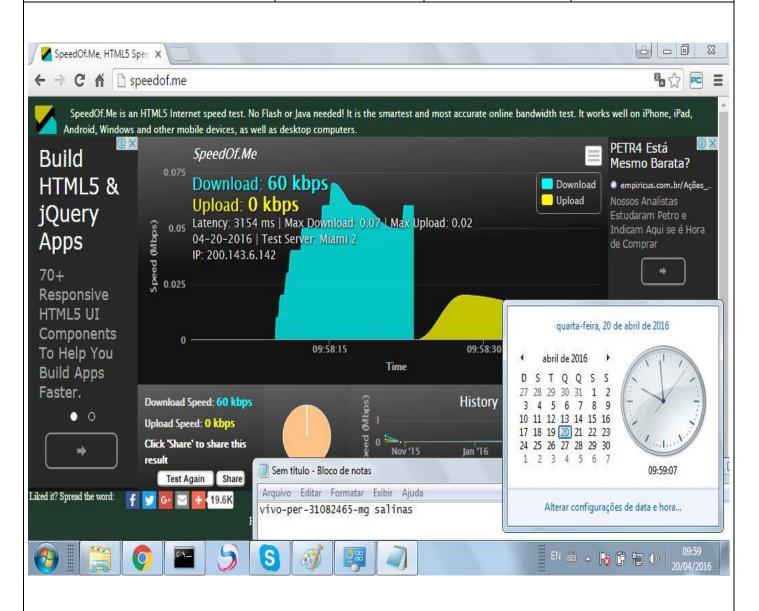

# dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 33.7 dBm

EIRP : 47.0 dBW

Default CW Frequency: 14.125750 GHz

ATM mode : VC-Mux Header Compression : None

```
Satellite (DVB) Transmitter Status
_____
                  : On (DVB-RCS)
State
IDU Output Power : -20.1 dBm
ODU Output Power : 33.5 dBm
                   : 46.8 dBW
EIRP
                   : 14.0 dB
Es/No
Header Compression : Disabled
Timing correction : -290 us (261484 us)
Frequency correction: 20 Hz
# dvb rx show
Satellite (DVB) RX Configuration
_____
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName
                                                                             Name
Enable
         9.320000 12.055825 DVB-S2 102 0 0.0 E
* 0 0
Yes
Satellite (DVB) Receiver Status
Rx State
            : On
: Forward link up
DVB State
Network
                  : 1326, GlobalIP@Telstar-14R
Frequency : 12.055816 GHz
Symbol Rate : 9.319872 Msps
S2 ModCod
   - receiving : 16 8PSK-8/9
    - current max : 20 16APSK-4/5
Pilot
            : On
Frame length : Short DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off
                 : 0.20
SNR
                  : 14.2 dB
Input Power : -29 dBm
IP DVB 10.53.0.83/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=800 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=690 ms
64 bytes from 8.8.8.8: time=740 ms
64 bytes from 8.8.8.8: time=710 ms
--- ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 690/720/800 ms
```