

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26071509-PE

Link kbps
256K/128K

Plataforma
VSAT

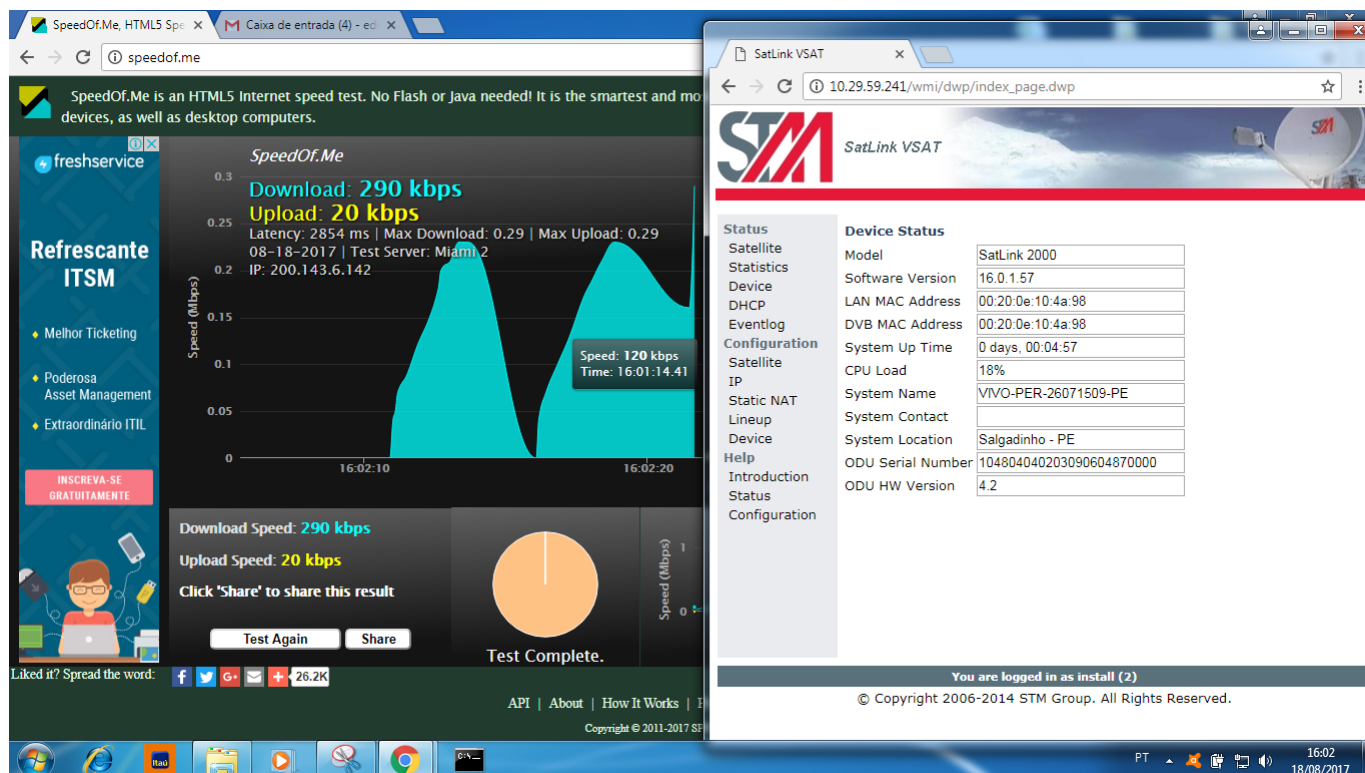

```
# dvb tx show
```

Satellite (DVB) TX Configuration

```
-----
Auto start           : Enabled
IDU Output Power     : -20 dBm
IDU Max Output Power : 0.0 dBm
ODU Output Power     : 33.0 dBm
EIRP                 : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode             : VC-Mux
Header Compression   : None
```

Satellite (DVB) Transmitter Status

```
-----
State                : On (DVB-RCS2)
IDU Output Power     : -16.6 dBm
ODU Output Power     : 32.8 dBm
EIRP                 : 45.8 dBW
Es/No                : 11.0 dB
```

Header Compression : Disabled
Timing correction : -74 us (251196 us)
Frequency correction: 0 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx	Pri	SymbRate[Mbps]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName
Name		Enable						
* 0	0	25.333333	12.050000	DVB-S2	102	0	0.0 E	
Yes								
7	7	30.000000	12.050000	DVB-S2	102	0	0.0 E	
Yes								

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049618 GHz
Symbol Rate : 25.333011 Msps
S2 ModCod
- receiving : 12 8PSK-3/5
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.3 dB
Input Power : -17 dBm

SatLink VSAT

10.29.59.241/wmi/dwp/index_page.dwp

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:4a:98

00:20:0e:10:4a:98

0 days, 00:02:22

28%

VIVO-PER-26071509-PE

Salgadinho - PE

104804040203090604870000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

CMD - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=699ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=772ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=878ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=573ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=649ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1071ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=748ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=794ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=573ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=652ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=728ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1174ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=724ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=721ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=867ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=585ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1028ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=721ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=682ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1950ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=720ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=721ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=593ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=686ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=752ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=822ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=887ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=607ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=781ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=777ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=863ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=561ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=631ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=709ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=704ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=862ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=954ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=660ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=749ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=685ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=884ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=600ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=682ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=762ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=893ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=553ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 49, Recebidos = 0 (0% de perda).
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 553ms, Máximo = 2462ms, Média = 814ms
Control-C
^C
C:\Windows\System32>

15:33

18/08/2017