


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Bruno Carvalho de Sá Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-26039958-PE256/128VSAT

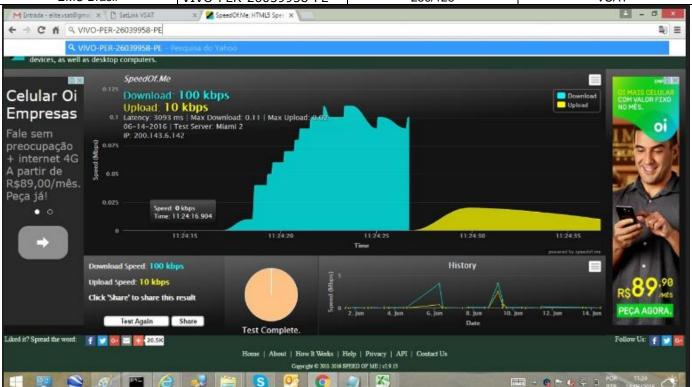

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -20 dBm

IDU Max Output Power: 0.0 dBm

Default CW Frequency: 14.125850 GHz

ATM mode : VC-Mux

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS)
IDU Output Power : -19.8 dBm
Es/No : 13.0 dB
Header Compression : Disabled

Timing correction : -236 us (261137 us)

Frequency correction: 80 Hz

dvb rx show Satellite (DVB) RX Configuration ______ Auto start Auto start . Enable:
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute : Enabled Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name Enable 9.320000 12.055825 DVB-S2 102 0 0.0 E * 0 0 Yes Satellite (DVB) Receiver Status _____ : On
: Forward link up
: 1326, GlobalIP@Telstar-14R
: 12.055946 GHz
: 9.320181 Msps Rx State DVB State Network Frequency Symbol Rate S2 ModCod - receiving : 15 8PSK-5/6 - current max : 16 8PSK-8/9 : On Pilot Frame length : Short DVB S2 Mode : ACM : ACM DVB S2 Mode DVB S2 Stream type : MPEG-TS Roll off : 0.20 SNR : 14.1 dB Input Power : -37 dBm IP DVB 172.18.131.21 /32 # ping 8.8.8.8 64 bytes from 8.8.8.8: time=620 ms 64 bytes from 8.8.8.8: time=720 ms 64 bytes from 8.8.8.8: time=700 ms 64 bytes from 8.8.8.8: time=720 ms 64 bytes from 8.8.8.8: time=850 ms --- ping statistics ---5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 620/760/850 ms

