

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31211036-MG

Link kbps
256K/128K

Plataforma
VSAT

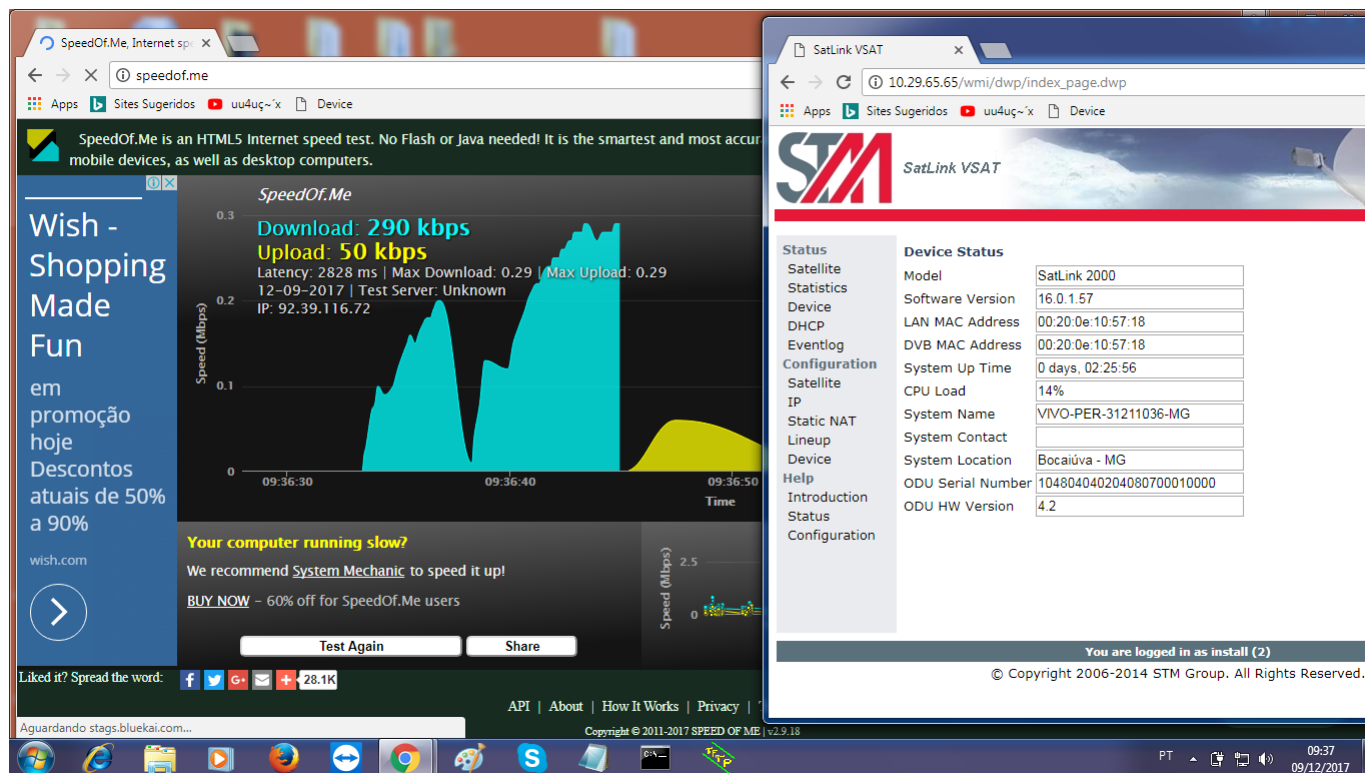

SatLink VSAT

10.29.65.65/wmi/dwp/index_page.dwp

Apps Sites Sugeridos uu4u~x Device

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:57:18

00:20:0e:10:57:18

0 days, 00:02:20

11%

VIVO-PER-31211036-MG

Bocaiuva - MG

104804040204080700010000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Administrador: Prompt de Comando

Auto start : Enabled

IDU Output Power : -28 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : max

EIRP : max

Default CW Frequency: 0.000000 GHz

ATM mode : UC-Mux

Header Compression : None

Satellite <DVB> Transmitter Status

State : On <DVB-RCS2>

IDU Output Power : -17.2 dBm

ODU Output Power : 33.4 dBm

EIRP : 46.7 dBW

Es/No : 13.5 dB

Header Compression : Disabled

Timing correction : 5 us <250013 us>

Frequency correction: -110 Hz

Satellite <DVB> RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SynbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName

Name

* 0 0 25.333333 Enable 12.050000 DVB-S2 102 0 0.0 E

1 1 30.000000 Yes 12.050000 DVB-S2 4 0 0.0 E

Satellite <DVB> Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, 114R Beam

Frequency : 12.049759 GHz

Symbol Rate : 25.332708 Msps

S2 ModCod

- receiving : 12 8PSK-3/5

- current max : 18 16APSK-2/3

Pilot : On

Frame length : Short

DVB S2 Mode : ACM

DVB S2 Stream type : MPEG-TS

Roll off : 0.20

SNR : 11.6 dB

Input Power : -28 dBm

#

Conexão ao host perdida.

C:\Users\Nsus>

SatLink VSAT

10.29.65.65/wmi/dwp/index_page.dwp

Apps Sites Sugeridos uu4u~x Device

STM

SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact

System Location

ODU Serial Number

ODU HW Version

SatLink 2000

16.0.1.57

00:20:0e:10:57:18

00:20:0e:10:57:18

0 days, 02:25:56

14%

VIVO-PER-31211036-MG

Bocaiuva - MG

104804040204080700010000

4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Administrador: Prompt de Comando

Microsoft Windows [versão 6.1.7601]

Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Nsus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:

Resposta de 8.8.8.8: bytes=32 tempo=823ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=891ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=972ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1072ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1045ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1086ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1091ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1056ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1104ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1084ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1065ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1443ms TTL=49

Estatísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 15, Recebidos = 15, Perdidos = 0 (0% de perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 823ms, Máximo = 1443ms, Média = 1063ms

Control-C

^C

C:\Users\Nsus>arp -a

Interface: 10.29.65.66 --- 0xc

Endereço IP Endereço físico Tipo

10.29.65.65 00-20-0e-10-57-18 dinâmico

10.29.65.71 ff-ff-ff-ff-ff-ff estático

224.0.0.22 01-00-5e-00-00-16 estático

224.0.0.252 01-00-5e-00-00-fc estático

239.255.255.250 01-00-5e-7f-ff-fa estático

255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\Nsus>31211036_