


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogério Momi Frias Cliente: VIVO

> **Empresa VSAT-ID** Link kbps **Plataforma** VIVO-PER-31156981-MG 256/128 **VSAT**

EMC Brasil

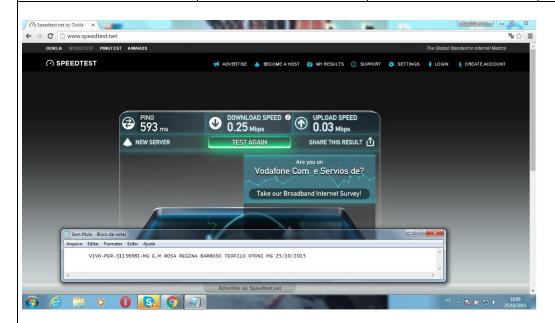

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable * 0 0 9.320000 12.055825 DVB-S2 4

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up
Network : 1326, GlobalIP@Telstar-14R
Frequency : 12.055710 GHz
Symbol Rate : 9.319885 Msps

S2 ModCod

- receiving : 1 QPSK-1/4 - current max : 23 16APSK-9/10

Pilot : On Frame length : Short DVB S2 Mode : ACM : 0.25 Roll off : 14.9 dB SNR Input Power : -21 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -30 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.7 dBm

EIRP : 48.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression: None

Satellite (DVB) Transmitter Status

State : On (TDMA) IDU Output Power : -19.5 dBm ODU Output Power : 34.4 dBm

: 47.7 dBW EIRP Eb/No : 16.5 dB

Header Compression: Disabled Timing correction : -282 us (262016 us)

Frequency correction: -150 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=850 ms 64 bytes from 8.8.8.8: time=610 ms 64 bytes from 8.8.8.8: time=520 ms 64 bytes from 8.8.8.8: time=610 ms 64 bytes from 8.8.8.8: time=630 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 520/640/850 ms