


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha Cliente: VIVO

> **Empresa** VSAT-ID Link kbps Plataforma **EMC** Brasil 256k/128k **VSAT** VIVO-PER-22025022-PI

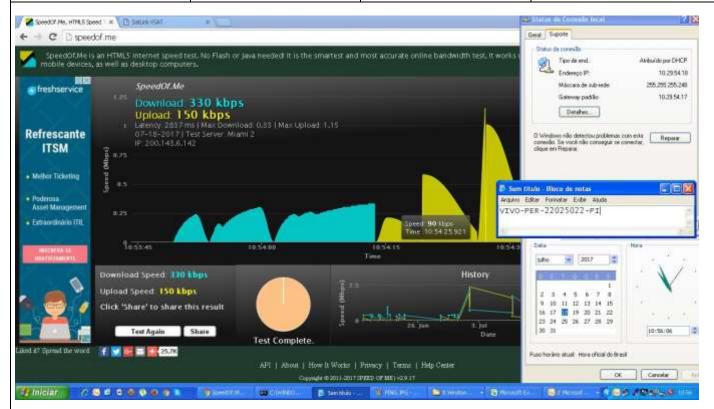

dvb tx show

Satellite (DVB) TX Configuration

______ Auto start

Auto start : Enabled IDU Output Power : -20 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : max EIRP : max

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

: On (DVB-RCS2)

IDU Output Power : -10.1 dBm
ODU Output Power : 32.8 dBm
EIRP : 46.1 dBW : 9.5 dB Es/No Header Compression : Disabled

Timing correction : -66 us (248537 us)

Frequency correction: 40 Hz

dvb rx show

Satellite (DVB) RX Configuration Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name

Enable

25.333333 12.050000 DVB-S2 102 0 0.0 E * 0 0

Yes

1 1 15.000000 12.059000 DVB-S2 4 0 0.0 E

Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049915 GHz
Symbol Rate : 25.333097 Msps
S2 ModCod

S2 ModCod

- receiving : 15 8PSK-5/6 - current max : 22 16APSK-8/9

Pilot : On Frame length : Short DVB S2 Mode : ACM DVB S2 Stream type : MPEG-TS Roll off : 0.20 SNR : 15.0 dB Input Power : -27 dBm

