

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31077623-MG

Link kbps
256k/128k

Plataforma
VSAT

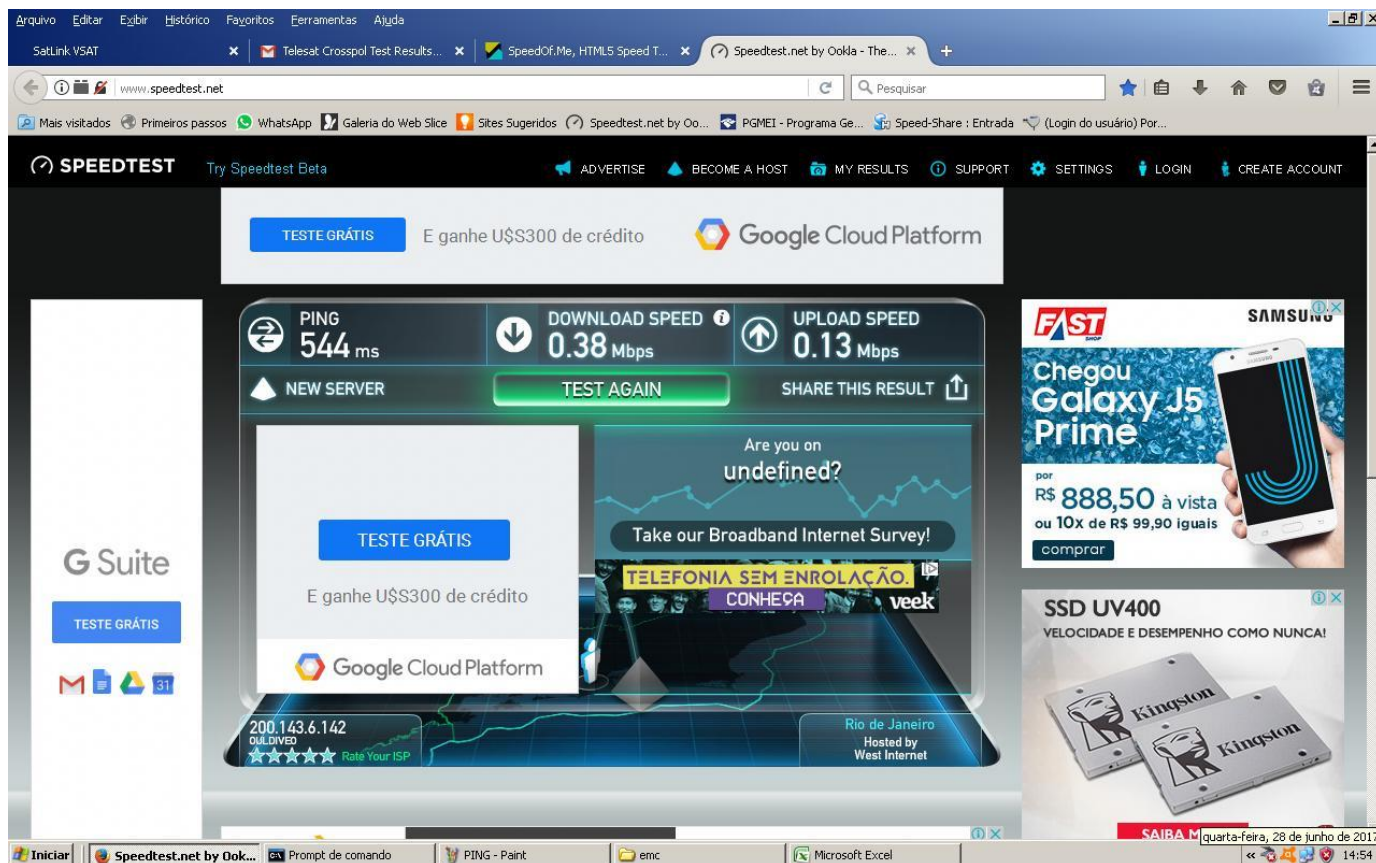

The screenshot shows a web browser window with the Speedtest.net website. The main content area displays test results: PING 544 ms, DOWNLOAD SPEED 0.38 Mbps, and UPLOAD SPEED 0.13 Mbps. There are buttons for 'NEW SERVER', 'TEST AGAIN', and 'SHARE THIS RESULT'. A large advertisement for Google Cloud Platform is visible, featuring a 'TESTE GRÁTIS' button and the text 'E ganhe U\$S300 de crédito'. To the right, there are two smaller advertisements: one for Samsung Galaxy J5 Prime and another for Kingston SSD UV400. The browser's address bar shows 'www.speedtest.net'. The taskbar at the bottom includes icons for 'Iniciar', 'Speedtest.net by Ookla...', 'Prompt de comando', 'PING - Paint', 'emc', and 'Microsoft Excel'. The system clock in the bottom right corner indicates 'quarta-feira, 28 de junho de 2017' and '14:54'.

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT x Telesat Crosspol Test Results x Speedtest.net by Ookla - The... x +

10.29.48.97/vmi/dwp/index_page.dwp 90% Pesquisar

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:58:bb
DVB MAC Address	00:20:0e:10:58:bb
System Up Time	0 days, 01:04:16
CPU Load	31%
System Name	VIVO-PER-31077623-MG
System Contact	
System Location	Matipo - MG
ODU Serial Number	10480404020309060593C
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

quarta-feira, 28 de junho de 2017 14:59

Inicio SatLink VSAT - Mozilla Fir... Telnet 10.29.48.97 TESTE - Paint emc Microsoft Excel

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT x Telesat Crosspol Test Results x SpeedOf.Me, HTML5 Speed T... x Speedtest.net by Ookla - The... x +

10.29.48.97/vmi/dwp/index_page.dwp 90% Pesquisar

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:58:bb
DVB MAC Address	00:20:0e:10:58:bb
System Up Time	0 days, 00:57:13
CPU Load	26%
System Name	VIVO-PER-31077623-MG
System Contact	
System Location	Matipo - MG
ODU Serial Number	10480404020309060593C
ODU HW Version	4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

quarta-feira, 28 de junho de 2017 14:52

Inicio SatLink VSAT - Mozilla Fir... Prompt de comando tcx - Paint emc Microsoft Excel

```
Header Compression : None

Satellite <DUB> Transmitter Status

State : On <DUB-RCS2>
IDU Output Power : -17.1 dBm
ODU Output Power : 32.4 dBm
ETRP : 45.2 dBm
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -47 us <255777 us>
Frequency correction: 50 Hz
#

Satellite <DUB> RX Configuration

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 15.000000 12.059000 DUB-S2 102 0 0.0 E
1 1 9.320000 Yes 12.055025 DUB-S2 4 0 0.0 E

Satellite <DUB> Receiver Status

Rx State : On
DUB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.058973 GHz
Symbol Rate : 15.000123 Msps
S2 ModCod
- receiving : 7 QPSK-3/4
- current max : 21 16APSK-5/6
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 12.8 dB
Input Power : -29 dBm
#
```

```
Resposta de 8.8.8.8: bytes=32 tempo=743ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1168ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=973ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1147ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1801ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1284ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1793ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1445ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=703ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=579ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=752ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=716ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=802ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=750ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=698ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=794ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1103ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=956ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=667ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=625ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=591ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=774ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=629ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=700ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=778ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=631ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=593ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=790ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1073ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1070ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=594ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=664ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1648ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1046ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=625ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1002ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=1146ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 106, Recebidos = 106, Perdidos = 0 <0% de perda>.
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 560ms, Máximo = 2126ms, Média = 982ms
Control-C
C:\Documents and Settings\Administrador>
```