



TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC
Brasil

VSAT-ID
VIVO-PER-23013249-CE

Link kbps
1024k/256k

Plataforma VSAT

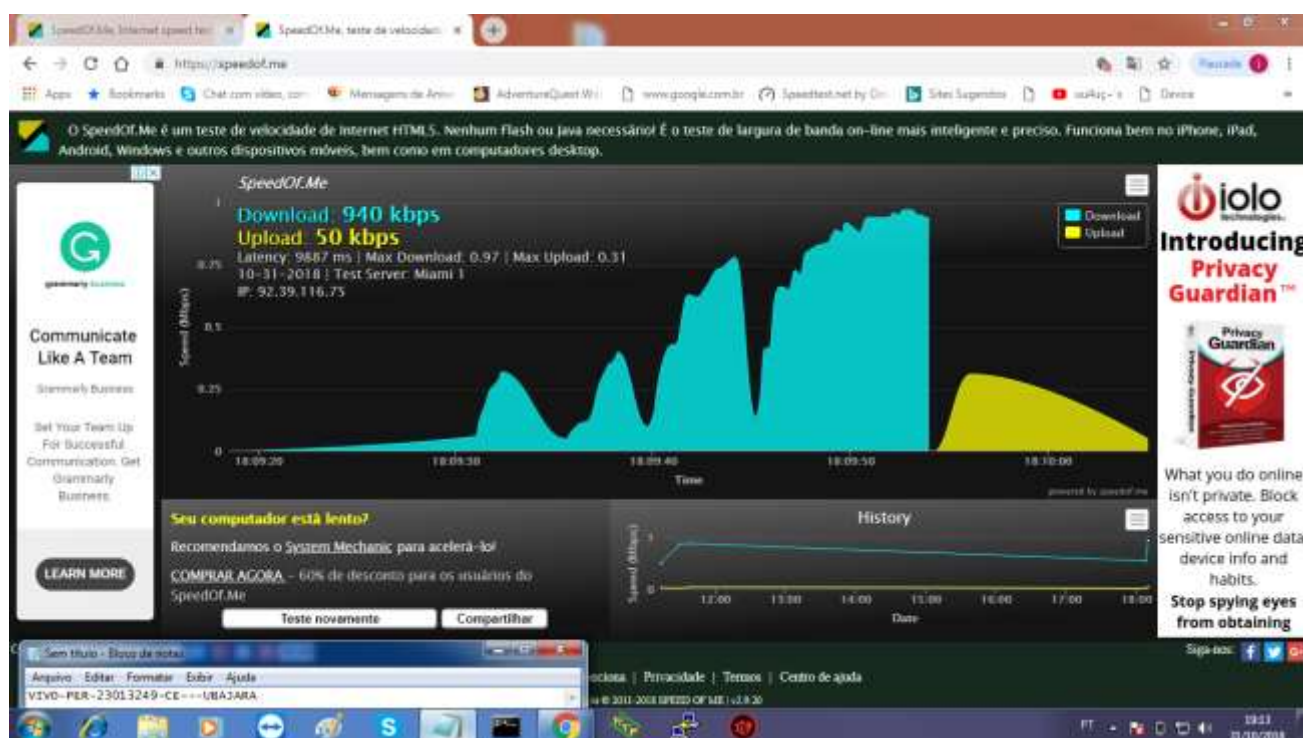

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:
Resposta de 8.8.8.8: bytes=32 tempo=1007ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1078ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=1443ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=712ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=671ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=868ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=590ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=660ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=746ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=823ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=539ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=601ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=696ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=776ms TTL=118

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 14, Recebidos = 14, Perdidos = 0 (0% de
    perda),
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 539ms, Máximo = 1443ms, Média = 800ms
Control-C
^C
C:\Users\Asus>arp -a

Interface: 10.29.75.242 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.75.241      00-20-0e-10-89-83    dinâmico
10.29.75.247      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23013249-CE_
```

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>tracert 8.8.8.8

Rastreando a rota para google-public-dns-a.google.com [8.8.8.8]
com no máximo 30 saltos:

 1  <1 ms    <1 ms    1 ms    10.29.75.241
 2  *        *        *        Esgotado o tempo limite do pedido.
 3  2382 ms  1794 ms  2349 ms  172.30.3.102
 4  700 ms   1155 ms  2421 ms  92.39.116.18
 5  1168 ms  1412 ms  2245 ms  static-1.112.39.92.in-addr.arpa [92.39.112.1]
 6  1024 ms  1071 ms  1699 ms  s200-189-162-154.ipb.diveo.net.br [200.189.162.1
54]
 7  1341 ms  1864 ms  815 ms  200-147-28-129.static.uol.com.br [200.147.28.129
]
 8  1067 ms  2108 ms  1204 ms  as15169.saopaulo.sp.ix.br [187.16.216.55]
 9  1974 ms  1141 ms  970 ms  108.170.245.161
10  1555 ms  *        1381 ms  108.170.232.43
11  *        *        *        Esgotado o tempo limite do pedido.
12  *        *        *        Esgotado o tempo limite do pedido.
13  *        *        *        Esgotado o tempo limite do pedido.
14  *        ^C

C:\Users\Asus>arp -a

Interface: 10.29.75.242 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.75.241      00-20-0e-10-89-83    dinâmico
10.29.75.247      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIU0-PER-23013249-CE_
```

Telnet 10.29.75.241

Satellite <DDB> TX Configuration

Auto start : Enabled
DDB status : Disabled
DDB Output Power : -20 dBm
DDB Max Output Power : 0.0 dBm
Default ON Frequency : 0.000000 GHz
DDB mode : VC_Max
Header Compression : None

Satellite <DDB> Transmitter Status

State : On <DDB-RC32>
DDB Output Power : -19.9 dBm
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -47 us (247960 us)
Frequency correction: 900 Hz

Satellite <DDB> RX Configuration

Auto start : Enabled
Max Signalling MDCOD : 23 (160PSK-9/18)
Max Traffic MDCOD : 26 (128PSK-9/18)
RS watchdog : 15 minute

Idx	Pr	SymbRate(Mbps)	Freq(GHz)	Mode	Papd	SatId	Poz	SatName
* 0	0	30.000000	11.592000	DVB-S2 182		0	0.0 E	

Satellite <DDB> Receiver Status

Rx State : On
DDB State : Forward link up
Network : 1336, T14R 30mm
Frequency : 11.592000 GHz
Symbol Rate : 30.000150 Mbps
S2 ModCod :
- receiving : 7 QPSK-2/4
- current max : 22 16APSK-d/4
Pilot : On
Frame length : Short
DVB S2 Mode : ACN
DVB S2 Stream type : MPEG-ES
Roll off : 0.20
SNR : 16.4 dB
Input Power : -24 dBm

SatLink VSA7

Não seguro | 10.29.75.241/semi/dep/index... | Fazer login

SatLink

Status

- Satellite
- Statistics
- Device
- DHCP
- Eventlog
- Configuration
- Satellite
- IP
- Static NAT
- Lineup
- Device
- Tools
- Help
- Introduction
- Status
- Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
Device	
LAN MAC Address	00 20 0e 10 89 83
DHCP	
DVB MAC Address	50 20 0e 10 89 83
System Up Time	0 days, 00:40:09
CPU Load	28%
System Name	VIVO-PER-23013249-CE
System Contact	
System Location	UBIRAJARA-CE

You are logged in as **initial (2)** on **VIVO-PER-23013249-CE**

© Copyright 2006-2016 NDS-Globus Technologies AG. All Rights Reserved.

19:28 01/10/2016