	# TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

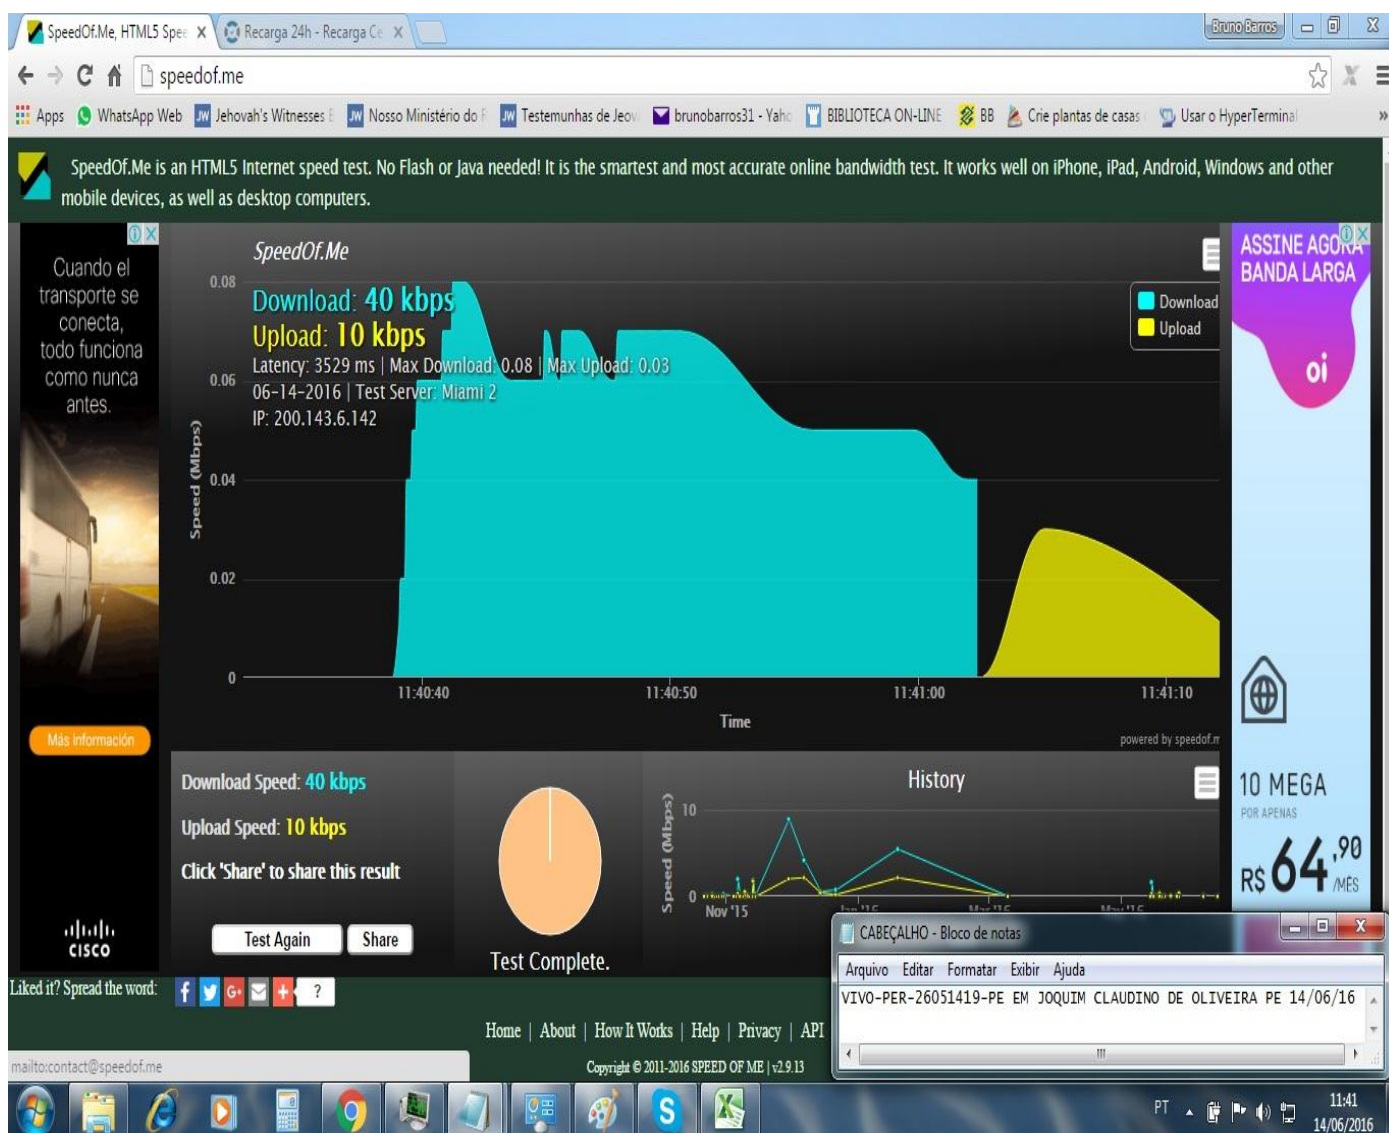| **NOC/Operador:** Allan Santos	**Cliente: VIVO**

Empresa	**VSAT-ID**	**Link kbps**	**Plataforma**
EMC Brasil	VIVO-PER-26051419-PE	256k/128k	VSAT


```
# dvb tx show

Satellite (DVB) TX Configuration
--------------------------------
Auto start          : Enabled
IDU Output Power    : -22 dBm
IDU Max Output Power: 0.0 dBm
Default CW Frequency: 14.125750 GHz
ATM mode            : VC-Mux
Header Compression  :  None


Satellite (DVB) Transmitter Status
```

```
--------------------------------
State               : On  (DVB-RCS)
IDU Output Power    : -21.8 dBm
Es/No               : 13.5 dB
Header Compression  : Disabled
Timing correction   : -240 us (262335 us)
Frequency correction: 110 Hz
#
# dvb rx show


Satellite (DVB) RX Configuration
--------------------------------
Auto start          : Enabled
Max Traffic MODCOD   : 23   16APSK-9/10
RX watchdog          : 15 minute

Idx  Pri  SymbRate[Msps] Freq[GHz] Mode   PopId   SatId  Pos   SatName          Name
Enable
* 0  0      9.320000      12.055825 DVB-S2 102         0   0.0 E
Yes


Satellite (DVB) Receiver Status
--------------------------------
Rx State            : On
DVB State           : Forward link up
Network             : 1326,  GlobalIP@Telstar-14R
Frequency           : 12.055855 GHz
Symbol Rate         : 9.319963 Msps
S2 ModCod
      - receiving   : 14   8PSK-3/4
      - current max : 16   8PSK-8/9
Pilot               : On
Frame length        : Short
DVB S2 Mode         : ACM
DVB S2 Stream type  : MPEG-TS
Roll off            : 0.20
SNR                 : 14.8 dB
Input Power         : -34 dBm
#



IP DVB 172.18.131.16/32



Ping desde o MGMT- Server ao IP de trafego e para o DVB.



Ping desde dentro da VSAT 8.8.8.8



# ping 8.8.8.8
64 bytes from 8.8.8.8: time=680 ms
64 bytes from 8.8.8.8: time=770 ms
64 bytes from 8.8.8.8: time=650 ms
64 bytes from 8.8.8.8: time=720 ms
64 bytes from 8.8.8.8: time=700 ms

---  ping statistics ---
5 packets transmitted, 5 received,  0.00 percent packet loss
rtt min/avg/max = 650/700/770 ms
#
```