



Spring 2026 CE433 Course Project: An Pulse Sensor ASIC Design

The goal of this projet is to design a pulse sensor ASIC that includes an off-chip amplifier/filter circuit, an on-chip ADC, Picoblaze CPU, and a SPI modul communicates with an OLED display module (Pmod OLED: 128 x 32 Pixel Monochromatic OLED Display).

The product diagram can be found below.

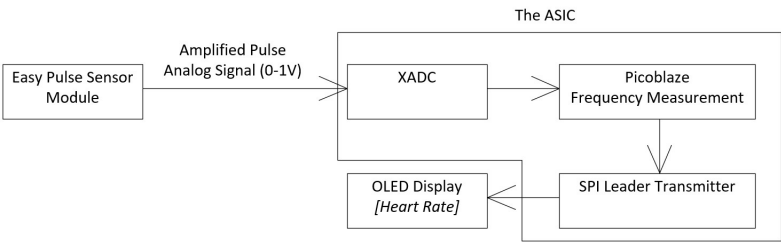

The Pmod OLED schematic can be found below.

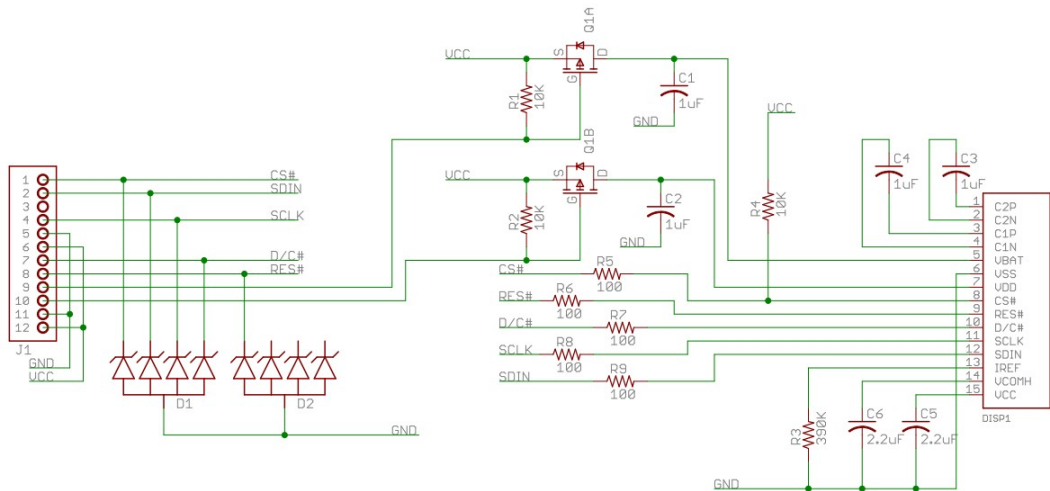

The pinout table can be found below. The CS, MOSI, and SCK pins are standard SPI pins. The fourth pin is D/C which is for Data/Command Control.


Pinout Description Table

Header J1					
Pin	Signal	Description	Pin	Signal	Description
1	CS	Chip Select	7	D/C	Data/Command Control
2	MOSI	Master-Out-Slave-In	8	RES	Power Reset
3	NC	Not Connected	9	VBATC	Vbat Battery Voltage Control
4	SCK	Serial Clock	10	VDDC	Vdd Logic Voltage Control
5	GND	Power Supply Ground	11	GND	Power Supply Ground
6	VCC	Power Supply (3.3V)	12	VCC	Power Supply (3.3V)


The D/C pin determines if the bytes are for the display or for the commands. The [SSD1306 datasheet](#) shows the details. From the datasheet, Section 8.1.3 MCU Serial Interface (4-wire SPI) describes how to use the fourth pin D/C. SDIN is shifted into an 8-bit shift register on every rising edge of SCLK in the order of D7, D6, ... D0. D/C# is sampled on every eighth clock and the do shift register is written to the Graphic Display Data RAM (GDDRAM) or command register in the same clock.

Table 8-4 : Control pins of 4-wire Serial interface

Function	E(RD#)	R/W#(WR#)	CS#	D/C#	D0
<u>Write command</u>	Tie LOW	Tie LOW	L	<u>L</u>	↑
<u>Write data</u>	Tie LOW	Tie LOW	L	<u>H</u>	↑

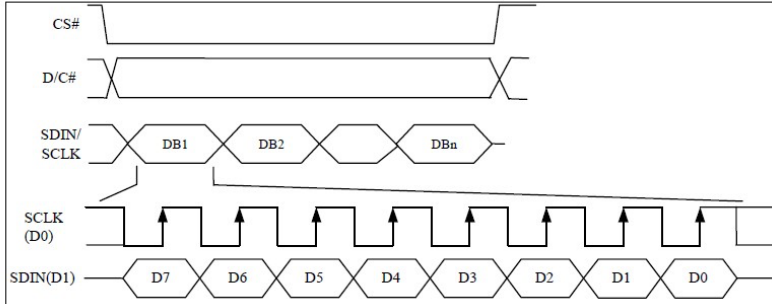Figure 8-5 : Write procedure in 4-wire Serial interface mode

However, for the Section 8.1.4 MCU Serial Interface (3-wire SPI), it requires the D/C command to be sent along with data as D8. This requires a different driver in hardware and software to handle this bit.

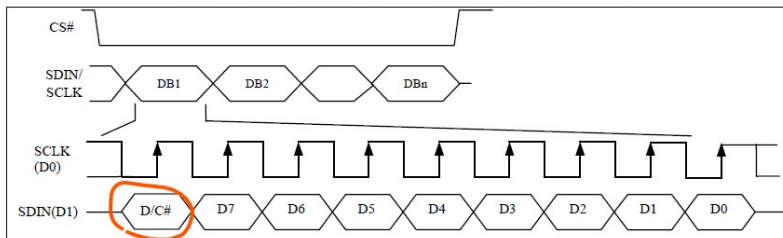Figure 8-6 : Write procedure in 3-wire Serial interface mode

The Pmod OLED example page provided an [example package](#) for the Nexys 3 board. We are using the Basys 3 board so some pins, connections, and the code need changes to be compatible with the board.

Open the top file of the design, the port declaration tells that DC is a fourth pin so it must use the 4-wire SPI timing diagram.

```


////////////////////////////////////
module PmodOLEDctrl(
    CLK,
    RST,
    CS,
    SDIN,
    SCLK,
    DC,
    RES,
    VBAT,
    VDD
);

// ===== Port
//
Declarations
// =====
input CLK;
input RST;
output CS;
output SDIN;
output SCLK;
output DC;
output RES;
output VBAT;
output VDD;

```

Bring the Picoblaze core to this design and write an assembly code to measure the digitized DO from the pulse sensor and count an average heart rate on the OLED display module.

The pins of the PmodOLED is mapped to the JB pins as follows:

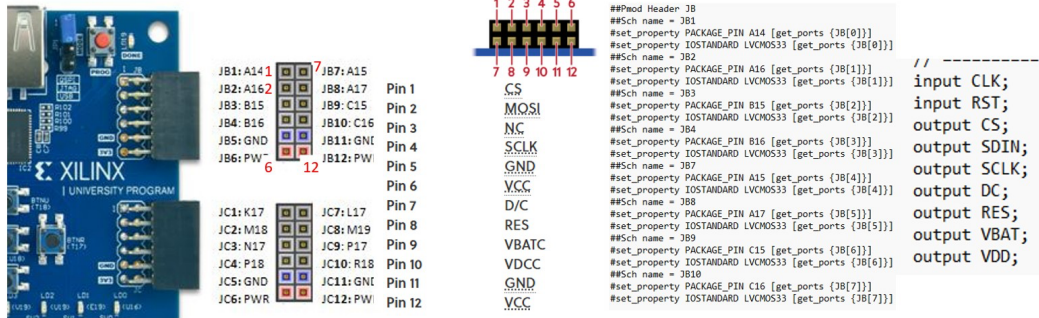


```

5
6 # Clock signal
7 set_property PACKAGE_PIN W5 [get_ports {CLK}]
8 set_property IOSTANDARD LVCMOS33 [get_ports {CLK}]
9 create_clock -period 10.000 -name sys_clk_pin -waveform {0.000 5.000} -add [get_ports {CLK}]
10
11 ## Switches
12 set_property PACKAGE_PIN V17 [get_ports {RST}]
13 set_property IOSTANDARD LVCMOS33 [get_ports {RST}]
14 set_property PACKAGE_PIN V16 [get_ports {sw[1]}]
15 set_property IOSTANDARD LVCMOS33 [get_ports {sw[1]}]
16 set_property PACKAGE_PIN W16 [get_ports {sw[2]}]
17 set_property IOSTANDARD LVCMOS33 [get_ports {sw[2]}]
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77

```

The following content in OledEX.v must be replaced by the initial begin/end block listed below since the format is not supported by Vivado.

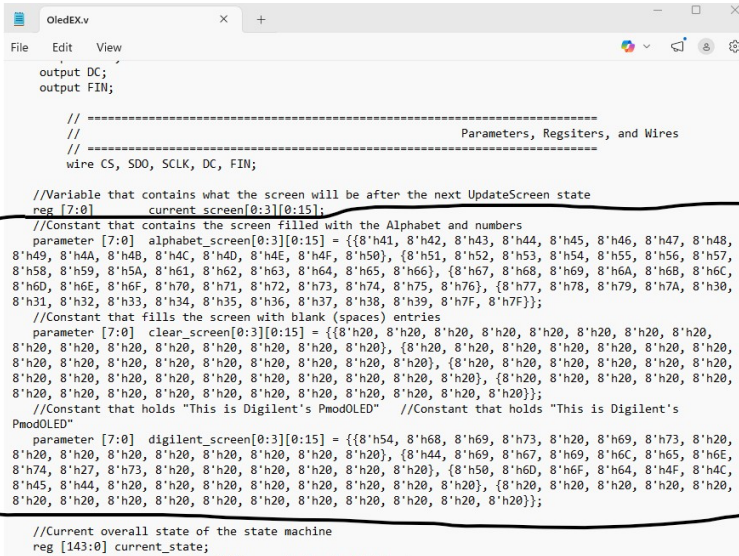

```

OledEX.v
File Edit View
output DC;
output FIN;

// =====
//                                     Parameters, Regsisters, and Wires
// =====
wire CS, SDO, SCLK, DC, FIN;

//Variable that contains what the screen will be after the next UpdateScreen state
reg [7:0] current_screen[0:3][0:15];

//Constant that contains the screen filled with the Alphabet and numbers
parameter [7:0] alphabet_screen[0:3][0:15] = {{8'h41, 8'h42, 8'h43, 8'h44, 8'h45, 8'h46, 8'h47, 8'h48,
8'h49, 8'h4A, 8'h4B, 8'h4C, 8'h4D, 8'h4E, 8'h4F, 8'h50}, {8'h51, 8'h52, 8'h53, 8'h54, 8'h55, 8'h56, 8'h57,
8'h58, 8'h59, 8'h5A, 8'h5B, 8'h5C, 8'h5D, 8'h5E, 8'h5F, 8'h60}, {8'h61, 8'h62, 8'h63, 8'h64, 8'h65, 8'h66, 8'h67,
8'h68, 8'h69, 8'h6A, 8'h6B, 8'h6C, 8'h6D, 8'h6E, 8'h6F, 8'h70, 8'h71, 8'h72, 8'h73, 8'h74, 8'h75, 8'h76}, {8'h77, 8'h78, 8'h79, 8'h7A, 8'h7B,
8'h7C, 8'h7D, 8'h7E, 8'h7F, 8'h80, 8'h81, 8'h82, 8'h83, 8'h84, 8'h85, 8'h86, 8'h87, 8'h88, 8'h89, 8'h8A, 8'h8B, 8'h8C, 8'h8D, 8'h8E, 8'h8F, 8'h90, 8'h91, 8'h92, 8'h93, 8'h94, 8'h95, 8'h96, 8'h97, 8'h98, 8'h99, 8'h9A, 8'h9B, 8'h9C, 8'h9D, 8'h9E, 8'h9F, 8'hA0, 8'hA1, 8'hA2, 8'hA3, 8'hA4, 8'hA5, 8'hA6, 8'hA7, 8'hA8, 8'hA9, 8'hAA, 8'hAB, 8'hAC, 8'hAD, 8'hAE, 8'hAF, 8'hB0, 8'hB1, 8'hB2, 8'hB3, 8'hB4, 8'hB5, 8'hB6, 8'hB7, 8'hB8, 8'hB9, 8'hBA, 8'hBB, 8'hBC, 8'hBD, 8'hBE, 8'hBF, 8'hC0, 8'hC1, 8'hC2, 8'hC3, 8'hC4, 8'hC5, 8'hC6, 8'hC7, 8'hC8, 8'hC9, 8'hCA, 8'hCB, 8'hCC, 8'hCD, 8'hCE, 8'hCF, 8'hD0, 8'hD1, 8'hD2, 8'hD3, 8'hD4, 8'hD5, 8'hD6, 8'hD7, 8'hD8, 8'hD9, 8'hDA, 8'hDB, 8'hDC, 8'hDD, 8'hDE, 8'hDF, 8'hE0, 8'hE1, 8'hE2, 8'hE3, 8'hE4, 8'hE5, 8'hE6, 8'hE7, 8'hE8, 8'hE9, 8'hEA, 8'hEB, 8'hEC, 8'hED, 8'hEE, 8'hEF, 8'hF0, 8'hF1, 8'hF2, 8'hF3, 8'hF4, 8'hF5, 8'hF6, 8'hF7, 8'hF8, 8'hF9, 8'hFA, 8'hFB, 8'hFC, 8'hFD, 8'hFE, 8'hFF}};

//Constant that fills the screen with blank (spaces) entries
parameter [7:0] clear_screen[0:3][0:15] = {{8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20},
{8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20},
{8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20},
{8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20}};

//Constant that holds "This is Digilent's PmodOLED" //Constant that holds "This is Digilent's
PmodOLED"
parameter [7:0] diligent_screen[0:3][0:15] = {{8'h54, 8'h68, 8'h69, 8'h73, 8'h20, 8'h69, 8'h73, 8'h20,
8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20}, {8'h44, 8'h69, 8'h67, 8'h69, 8'h6C, 8'h65, 8'h6E,
8'h74, 8'h27, 8'h73, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20}, {8'h58, 8'h6D, 8'h6F, 8'h64, 8'h4F, 8'h4C,
8'h45, 8'h44, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20}, {8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20, 8'h20}};

//Current overall state of the state machine
reg [143:0] current_state;

```

initial begin

```

// ===== Alphabet Screen =====
// Row 0
alphabet_screen[0][0]=8'h41; alphabet_screen[0][1]=8'h42;
alphabet_screen[0][2]=8'h43; alphabet_screen[0][3]=8'h44;
alphabet_screen[0][4]=8'h45; alphabet_screen[0][5]=8'h46;
alphabet_screen[0][6]=8'h47; alphabet_screen[0][7]=8'h48;
alphabet_screen[0][8]=8'h49; alphabet_screen[0][9]=8'h4A;
alphabet_screen[0][10]=8'h4B; alphabet_screen[0][11]=8'h4C;
alphabet_screen[0][12]=8'h4D; alphabet_screen[0][13]=8'h4E;
alphabet_screen[0][14]=8'h4F; alphabet_screen[0][15]=8'h50;

// Row 1
alphabet_screen[1][0]=8'h51; alphabet_screen[1][1]=8'h52;
alphabet_screen[1][2]=8'h53; alphabet_screen[1][3]=8'h54;
alphabet_screen[1][4]=8'h55; alphabet_screen[1][5]=8'h56;
alphabet_screen[1][6]=8'h57; alphabet_screen[1][7]=8'h58;
alphabet_screen[1][8]=8'h59; alphabet_screen[1][9]=8'h5A;
alphabet_screen[1][10]=8'h5B; alphabet_screen[1][11]=8'h5C;
alphabet_screen[1][12]=8'h5D; alphabet_screen[1][13]=8'h5E;
alphabet_screen[1][14]=8'h5F; alphabet_screen[1][15]=8'h60;

// Row 2
alphabet_screen[2][0]=8'h61; alphabet_screen[2][1]=8'h62;
alphabet_screen[2][2]=8'h63; alphabet_screen[2][3]=8'h64;
alphabet_screen[2][4]=8'h65; alphabet_screen[2][5]=8'h66;
alphabet_screen[2][6]=8'h67; alphabet_screen[2][7]=8'h68;
alphabet_screen[2][8]=8'h69; alphabet_screen[2][9]=8'h6A;
alphabet_screen[2][10]=8'h6B; alphabet_screen[2][11]=8'h6C;
alphabet_screen[2][12]=8'h6D; alphabet_screen[2][13]=8'h6E;
alphabet_screen[2][14]=8'h6F; alphabet_screen[2][15]=8'h70;

// Row 3
alphabet_screen[3][0]=8'h71; alphabet_screen[3][1]=8'h72;
alphabet_screen[3][2]=8'h73; alphabet_screen[3][3]=8'h74;
alphabet_screen[3][4]=8'h75; alphabet_screen[3][5]=8'h76;
alphabet_screen[3][6]=8'h77; alphabet_screen[3][7]=8'h78;
alphabet_screen[3][8]=8'h79; alphabet_screen[3][9]=8'h7A;
alphabet_screen[3][10]=8'h7B; alphabet_screen[3][11]=8'h7C;
alphabet_screen[3][12]=8'h7D; alphabet_screen[3][13]=8'h7E;
alphabet_screen[3][14]=8'h7F; alphabet_screen[3][15]=8'h80;

```

```
alphabet_screen[3][14]=8'h7F; alphabet_screen[3][15]=8'h7F;
```

```
// ===== Clear Screen =====
```

```
for (r = 0; r < 4; r = r + 1)
    for (c = 0; c < 16; c = c + 1)
        clear_screen[r][c] = 8'h20;
```

```
// ===== Diligent Screen =====
```

```
// Row 0: "This is"
```

```
diligent_screen[0][0]=8'h54; diligent_screen[0][1]=8'h68;
diligent_screen[0][2]=8'h69; diligent_screen[0][3]=8'h73;
diligent_screen[0][4]=8'h20; diligent_screen[0][5]=8'h69;
diligent_screen[0][6]=8'h73; diligent_screen[0][7]=8'h20;
diligent_screen[0][8]=8'h20; diligent_screen[0][9]=8'h20;
diligent_screen[0][10]=8'h20; diligent_screen[0][11]=8'h20;
diligent_screen[0][12]=8'h20; diligent_screen[0][13]=8'h20;
diligent_screen[0][14]=8'h20; diligent_screen[0][15]=8'h20;
```

```
// Row 1: "Diligent's"
```

```
diligent_screen[1][0]=8'h44; diligent_screen[1][1]=8'h69;
diligent_screen[1][2]=8'h67; diligent_screen[1][3]=8'h69;
diligent_screen[1][4]=8'h6C; diligent_screen[1][5]=8'h65;
diligent_screen[1][6]=8'h6E; diligent_screen[1][7]=8'h74;
diligent_screen[1][8]=8'h27; diligent_screen[1][9]=8'h73;
diligent_screen[1][10]=8'h20; diligent_screen[1][11]=8'h20;
diligent_screen[1][12]=8'h20; diligent_screen[1][13]=8'h20;
diligent_screen[1][14]=8'h20; diligent_screen[1][15]=8'h20;
```

```
// Row 2: "PmodOLED"
```

```
diligent_screen[2][0]=8'h50; diligent_screen[2][1]=8'h6D;
diligent_screen[2][2]=8'h6F; diligent_screen[2][3]=8'h64;
diligent_screen[2][4]=8'h4F; diligent_screen[2][5]=8'h4C;
diligent_screen[2][6]=8'h45; diligent_screen[2][7]=8'h44;
diligent_screen[2][8]=8'h20; diligent_screen[2][9]=8'h20;
diligent_screen[2][10]=8'h20; diligent_screen[2][11]=8'h20;
diligent_screen[2][12]=8'h20; diligent_screen[2][13]=8'h20;
diligent_screen[2][14]=8'h20; diligent_screen[2][15]=8'h20;
```

```
// Row 3: blank
```

```
for (c = 0; c < 16; c = c + 1)
    diligent_screen[3][c] = 8'h20;
```

```
end
```

In addition to the modifications above, you also need to create a memory 'charLib' to store the charLib.coe data. You can tell that charLib is instantiated in the module

Block Memory Generator (8.4)

Documentation IP Location Switch to Defaults

IP Symbol Power Estimation

☒ Show disabled ports

Component Name: **charLib**

Basic Port A Options Other Options Summary

Interface Type: **Native** ☐ Generate address interface with 32 bits

Memory Type: **Single Port ROM** ☐ Common Clock

ECC Options

ECC Type: **No ECC**

☐ Error Injection Pins: **Single Bit Error Injection**

Write Enable

☐ Byte Write Enable

Byte Size (bits): **9**

Algorithm Options

Defines the algorithm used to concatenate the block RAM primitives. Refer datasheet for more information.

Algorithm: **Minimum Area**

Primitive: **8kx2**

Documentation IP Location Switch to Defaults

IP Symbol Power Estimation

☒ Show disabled ports

Component Name: **charLib**

Basic **Port A Options** Other Options Summary

Memory Size

Port A Width: **8** Range: 1 to 4608 (bits)

Port A Depth: **61440** Range: 2 to 1048576

The Width and Depth values are used for Read Operation in Port A

Operating Mode: **Write First** Enable Port Type: **Always Enabled**

Port A Optional Output Registers

☒ Primitives Output Register ☐ Core Output Register

☐ SoftECC Input Register ☐ REGCEA Pin

Port A Output Reset Options

☐ RSTA Pin (set/reset pin) Output Reset Value (Hex): **0**

☐ Reset Memory Latch Reset Priority: **CE (Latch or Register Enable)**

READ Address Change A

☐ Read Address Change A

Documentation IP Location Switch to Defaults

IP Symbol Power Estimation

☒ Show disabled ports

Component Name: **charLib**

Basic Port A Options **Other Options** Summary

Pipeline Stages within Mux: **0** Mux Size: 15x1

Memory Initialization

☒ Load Init File

Coe File: **i:/26/pmodoledctrl_verlogi/pmodoled_Source/charLib.coe**

☐ Fill Remaining Memory Locations

Remaining Memory Locations (Hex): **0**

Structural/UniSim Simulation Model Options

Defines the type of warnings and outputs are generated when a read-write or write-write collision occurs.

Collision Warnings: **All**

Behavioral Simulation Model Options

☐ Disable Collision Warnings ☐ Disable Out of Range Warnings

Here is the result of the example from Digilent.

Documentation

- EMC Disclaimer, Digilent Development and Evaluation Kits

Example Projects

Microprocessor

- Installing the Digilent Core for Arduino
- Library and MPLAB Example
- Library and MPLAB Example
- Behand Tool Anti-Creep Alert System - Community Project
- Wearable Wellness System - Community Project
- Health and Security Cloud System - Community Project
- 3D road mapping automobile - Community Project
- Using the Pmod OLED with Arduino Uno - Application note

Programmable Logic

- News 1 Verilog Example - ISE H.2**
- News 3 VHDL Example - ISE H.2
- News 4 VHDL Example - Vivado H.1
- Sounding Rocket Avionics with FPGA - Community Project
- Getting Started with Digilent Pmod IPs

Primary IC
SSD1306
Reference
Pmod OLED Reference
Manual
Manual
Schematic
Schematic

Pinout

Pin 1 CS
Pin 2 MOSI
Pin 3 NC
Pin 4 SCLK
Pin 5 GND
Pin 6 VCC
Pin 7 D/C
Pin 8 RES
Pin 9 VBAIC
Pin 10 VDDC
Pin 11 GND



Yiyan Li



Watch on

Tasks:

- Task 1: Turn the PmodOLEDCtrl.v and the submodules into a Basys3 compatible design and display any characters on the OLED to prove its functionality. Picoblaze involved, only use the code from the example and make it Basys3 compatible. (50 points)
- Task 2: Add Picoblaze to the design, probe AO, read the XADC's output and display the binary form on the on-board LEDs. (50 points)
- Task 3: Use assembly and Picoblaze for frequency measurement and display heart rate on the OLED and at the same time, display realtime waveforms on plot. (50 points)

References:

- [Pmod OLED product page](#)
- [Pmod OLED support page](#)
- [Pmod OLED examples page](#)
- [SSD1306 datasheet](#)