


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins Silva Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-25090038-PE256/128VSAT

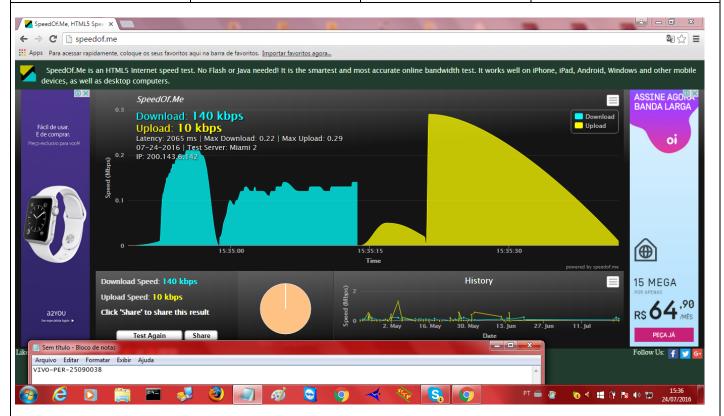

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -30 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 33.2 dBm

EIRP : 46.5 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS)
IDU Output Power : -22.4 dBm
ODU Output Power : 33.0 dBm
EIRP : 46.3 dBW
Es/No : 12.5 dB
Header Compression : Disabled

Timing correction : -162 us (262466 us)

Frequency correction: -60 Hz

dvb rx show

Satellite (DVB) RX Configuration _____

Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName Name

Enable

* 0 0 9.320000 12.055825 DVB-S2 102 0 0.0 E

Yes

Satellite (DVB) Receiver Status

Rx State : On

: Forward link up DVB State : 1326, T14R Beam Network : 12.055834 GHz : 9.319858 Msps Frequency Symbol Rate

S2 ModCod

- receiving : 14 8PSK-3/4 - current max : 16 8PSK-8/9

Pilot : On : Short Frame length DVB S2 Mode : ACM DVB S2 Stream type : MPEG-TS Roll off : 0.20 : 13.6 dB SNR : -25 dBm Input Power

