


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-23098120-CE
 256k/128k
 VSAT

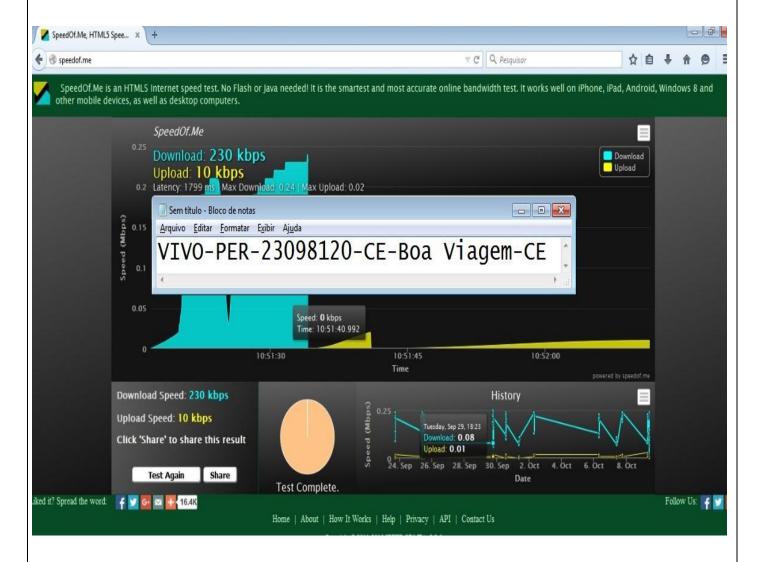

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -15 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.7 dBm EIRP : 48.0 dBW Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

```
: On (TDMA)
State
IDU Output Power : -15.2 dBm ODU Output Power : 35.0 dBm
                     : 48.3 dBW
EIRP
                      : 14.5 dB
Eb/No
Header Compression : Disabled
Timing correction : -36 us (260631 us)
Frequency correction: -410 Hz
# dvb rx show
Satellite (DVB) RX Configuration
_____
Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes
Satellite (DVB) Receiver Status
Rx State : On
DVB State : Forward link up
Network : 1326, GlobalIP(
                     : 1326, GlobalIP@Telstar-14R
Network
Frequency : 12.055813 GHz
Symbol Rate : 9.320272 Msps
S2 ModCod
   - receiving : 15 8PSK-5/6
      - current max : 23 16APSK-9/10
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off
                     : 0.25
SNR : 14.4 dB
Input Power : -26 dBm
IP DVB 10.50.0.175/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=580 ms
64 bytes from 8.8.8.8: time=600 ms
64 bytes from 8.8.8.8: time=710 ms
64 bytes from 8.8.8.8: time=650 ms
64 bytes from 8.8.8.8: time=720 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 580/650/720 ms
```