

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31204196-MG

Link kbps
256K/128K

Plataforma
VSAT

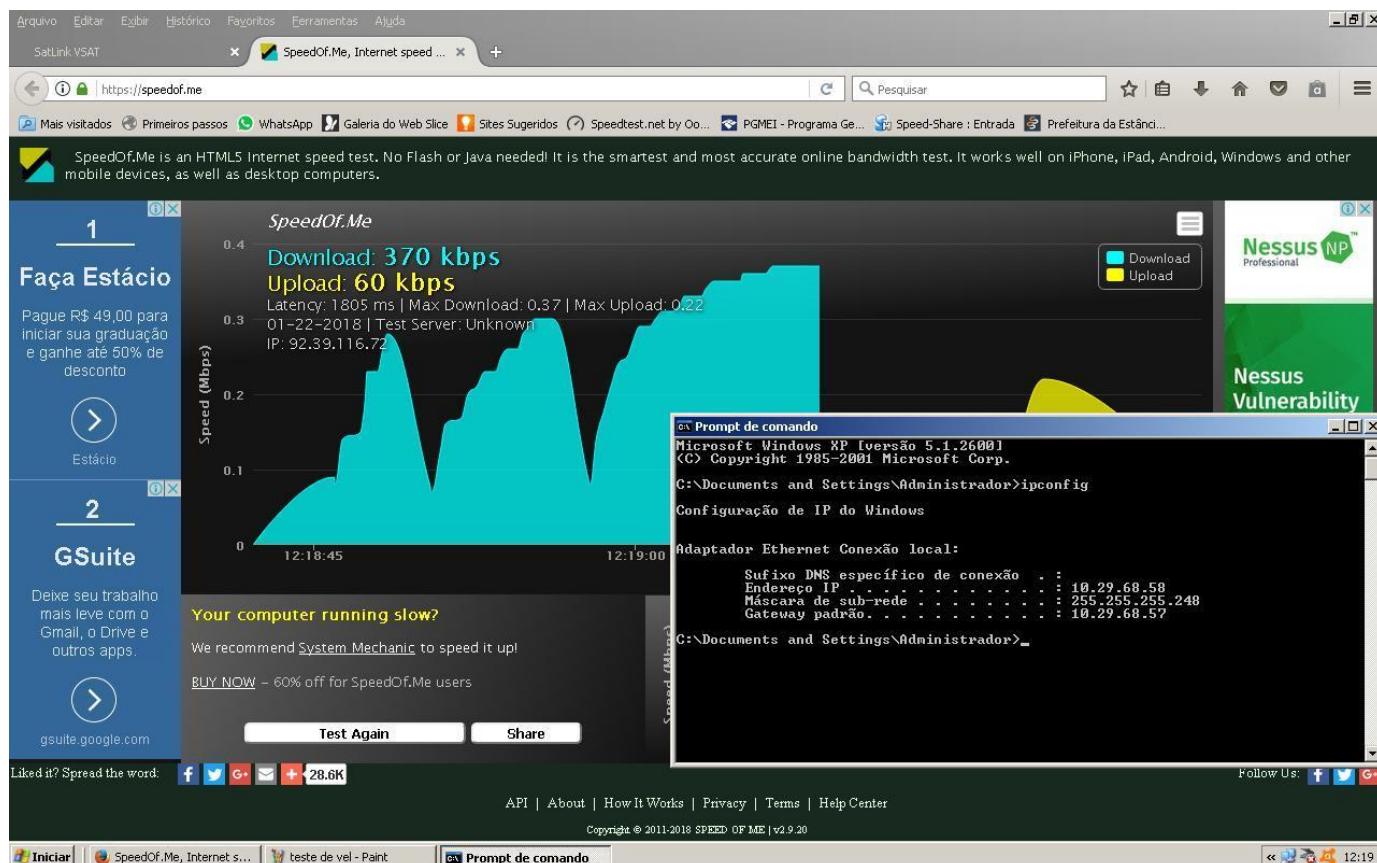

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT

10.29.68.57/vm/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

| | |
|------------------|----------------------|
| Model | SatLink 2000 |
| Software Version | 16.0.1.57 |
| LAN MAC Address | 00:20:0e:10:4c:2d |
| DVB MAC Address | 00:20:0e:10:4c:2d |
| System Up Time | 0 days, 00:07:24 |
| CPU Load | 22% |
| System Name | VIVO-FER-31204196-MG |
| System Contact | |
| System Location | Cristais - MG |

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Telnet 10.29.68.57

Header Compression : None

Satellite <DUB> Transmitter Status

State : On <DUB-RCS2>

IDU Output Power : -19.8 dBm

Es/No : 14.0 dB

Header Compression : Disabled

Timing correction : -135 us <249549 us>

Frequency correction: 30 Hz

#

Satellite <DUB> RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

| Idx | Pri | SymbRate[Mbps] | Freq[GHz] | Mode | PopId | SatId | Pos | SatName |
|-----|-----|----------------|-----------|--------|-------|-------|-----|---------|
| * 0 | 0 | 30.000000 | 12.050000 | DVB-S2 | 102 | 0 | 0.0 | E |
| 1 | 1 | 25.333333 | 12.050000 | DVB-S2 | 102 | 0 | 0.0 | E |

Satellite <DUB> Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326. 114R Beam

Frequency : 12.050000 GHz

Symbol Rate : 29.999439 Mbps

S2 ModCod

- receiving : 21 16APSK-5/6

- current max : 22 16APSK-8/9

Pilot : On

Frame length : Short

DVB S2 Mode : ACM

DVB S2 Stream type : MPEG-TS

Roll off : 0.20

SNR : 15.1 dB

Input Power : -33 dBm

#

Iniciar SatLink VSAT - Mozilla Fir... Telnet 10.29.68.57

Arquivo Editar Exibir Histórico Favoritos Ferramentas Ajuda

SatLink VSAT

10.29.68.57/vm/dwp/index_page.dwp

Mais visitados Primeiros passos WhatsApp Galeria do Web Slice Sites Sugeridos

STM SatLink VSAT

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

| | |
|------------------|----------------------|
| Model | SatLink 2000 |
| Software Version | 16.0.1.57 |
| LAN MAC Address | 00:20:0e:10:4c:2d |
| DVB MAC Address | 00:20:0e:10:4c:2d |
| System Up Time | 0 days, 00:07:24 |
| CPU Load | 22% |
| System Name | VIVO-FER-31204196-MG |
| System Contact | |
| System Location | Cristais - MG |

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved.

Prompt de comando

Resposta de 8.8.8.8: bytes=32 tempo=882ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1184ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1157ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=894ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=862ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1301ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=758ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1152ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1073ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=905ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=825ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=995ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1208ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=950ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=925ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=870ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=815ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=788ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1221ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=997ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1152ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1190ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1014ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=823ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=865ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=885ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1403ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=830ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=780ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=981ms TTL=49

Estatísticas do Ping para 8.8.8.8:

Pacotes: Enviados = 59, Recebidos = 59, Perdidos = 0 (0% de perda).

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 788ms, Máximo = 1403ms, Média = 1002ms

Control-C

^C

C:\Documents and Settings\Administrador>ipconfig

Configuração de IP do Windows

Adaptador Ethernet Conexão local:

Sufixo DNS específico de conexão : :

Endereço IP : 10.29.68.58

Máscara de sub-rede : 255.255.255.248

Gateway padrão. : 10.29.68.57

C:\Documents and Settings\Administrador>