

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Leonardo Martins


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-22062424-PI

Link kbps
256k/128k

Plataforma
VSAT

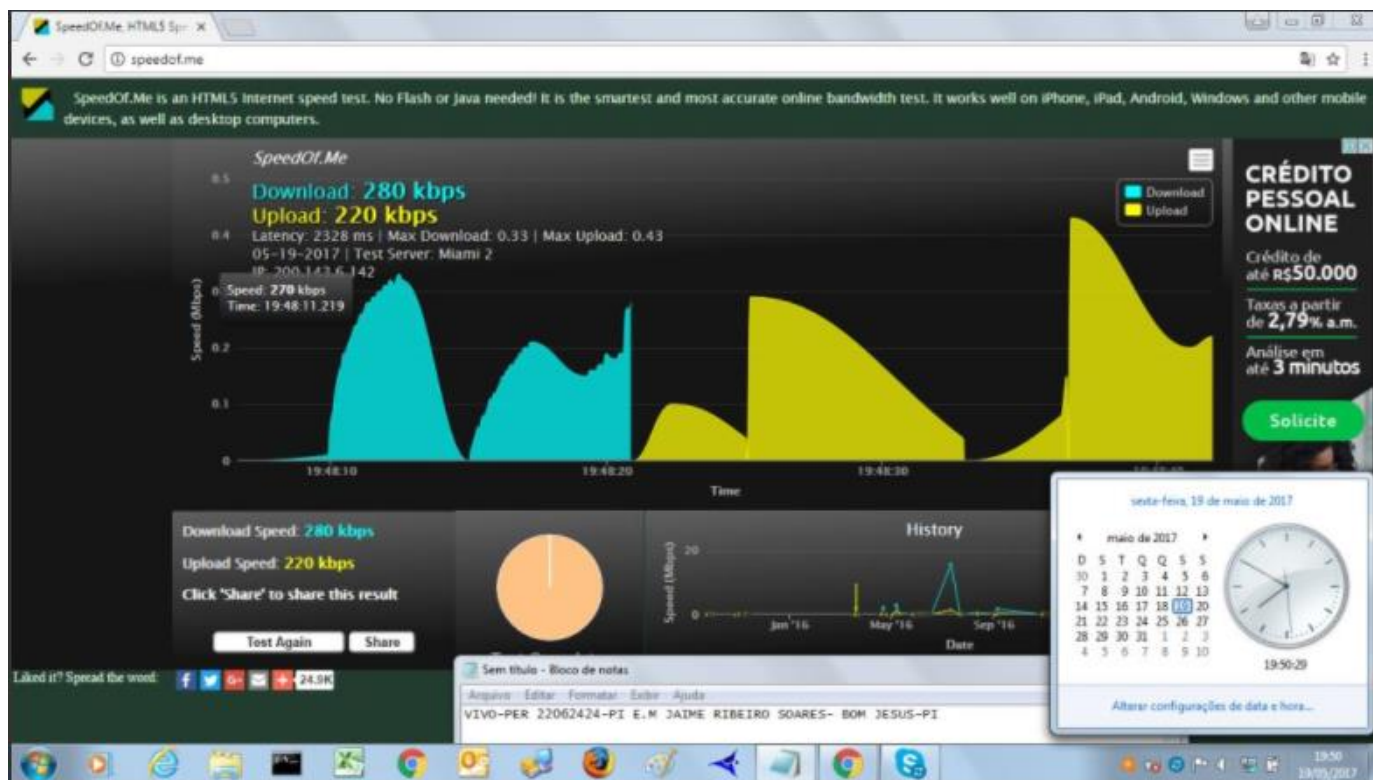

```
Telnet 10.47.8.49
Login: Password:
SatLink 2000
- Main board ID 120026, Revision B6.2
- SW ID 120200, Revision 16.0.1 Build 57
#
Satellite <DUB> TX Configuration
Auto start      : Enabled
IDU Output Power : -15 dBm
IDU Max Output Power: 0.0 dBm
Default CW Frequency: 0.000000 GHz
RTM mode       : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status
State          : On <DUB-RCS2>
IDU Output Power : -14.8 dBm
EIRP           : 13.5 dB
Header Compression : Disabled
Timing correction : -30 us <252909 us>
Frequency correction: 20 Hz
#
```

```
Telnet 192.168.0.1

SR watchdog : 15 minute

Idx Pri SynbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
= 0 0 15.000000 12.059000 DUB-S2 102 0 0.0 E

Satellite (DUB) Receiver Status

Rx State : On
DUB State : Forward link up
Network : 1326 T14R Beam
Frequency : 12.059043 GHz
Symbol Rate : 14.999944 Mbps
S2 ModCod
- receiving : 14 8PSK-3/4
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TC
Roll off : 0.20
SNR : 14.4 dB
Input Power : -35 dBm
S =
```

```
cmd - Atalho

Resposta de 8.8.8.8: bytes=32 tempo=1950ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=547ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=676ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3271ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=596ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1402ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=957ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=903ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3030ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1568ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1303ms TTL=55
Esgotado o tempo limite do pedido.
Resposta de 8.8.8.8: bytes=32 tempo=775ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=620ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=576ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=897ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3131ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=843ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1643ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=830ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3186ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1564ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1003ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=837ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=912ms TTL=55
Esgotado o tempo limite do pedido.
Resposta de 8.8.8.8: bytes=32 tempo=1400ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3226ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=734ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=2016ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1423ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=3590ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=836ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1398ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=1309ms TTL=55
Resposta de 8.8.8.8: bytes=32 tempo=842ms TTL=55

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 53, Recebidos = 50, Perdidos = 3 (5% de
    perda).
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 530ms, Máximo = 3590ms, Média = 1301ms
Control-C
^C
C:\Windows\System32>arp -a

Interface: 10.47.8.50 --- 0x13
    Endereço IP      Endereço físico      Tipo
    10.47.8.49        00-20-0e-10-0e-0d    dinâmico
    10.47.8.55        ff-ff-ff-ff-ff-ff    estático
    224.0.0.2         01-00-5e-00-00-02    estático
    224.0.0.251       01-00-5e-00-00-fb    estático
    224.0.0.252       01-00-5e-00-00-fc    estático
    219.255.255.250   01-00-5e-7f-ff-fa    estático
    255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Windows\System32>UIO-PER 22062424-PI E.M JAIME RIBEIRO COARES- DOM JESUS-PI
```