

# TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Felipe Freire


Cliente: VIVO

Empresa EMC  
Brasil

VSAT-ID  
VIVO-PER-23040424-CE

Link kbps  
1024k/256k

Plataforma VSAT

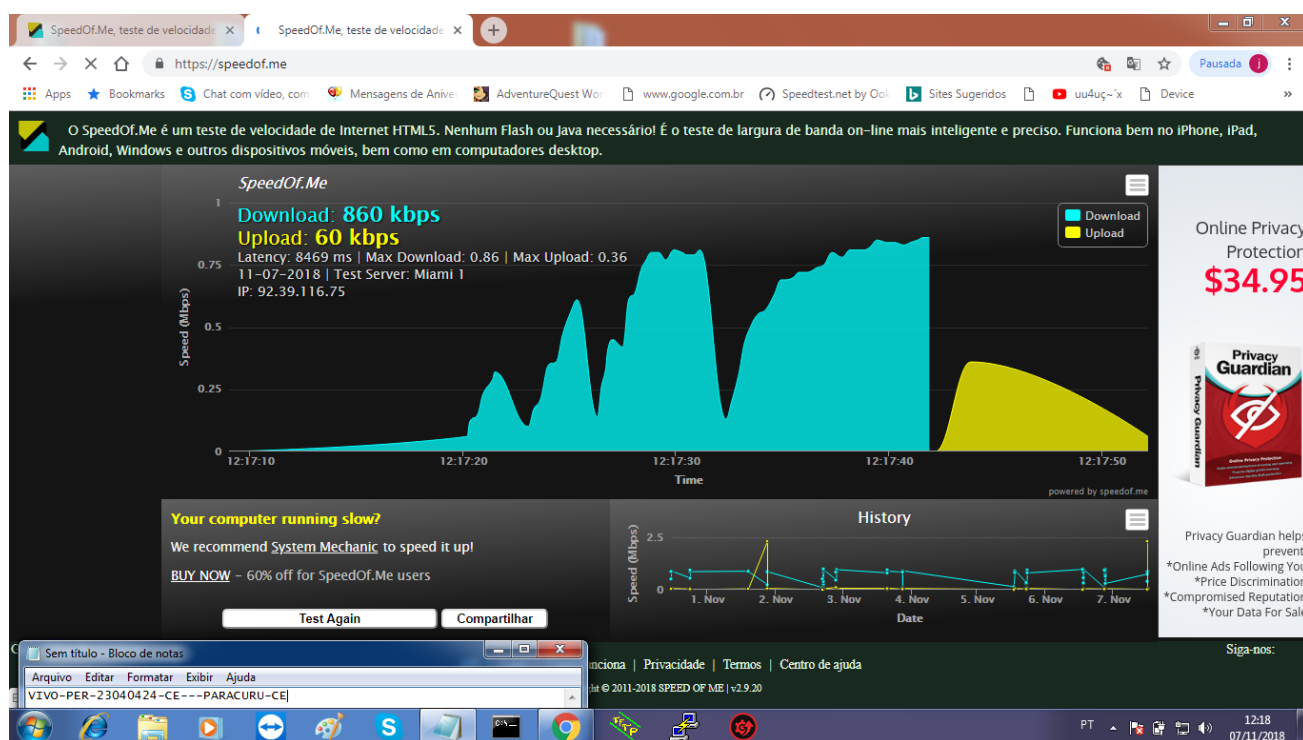

```
ca. Administrador: Prompt de Comando
Microsoft Windows [versão 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. Todos os direitos reservados.

C:\Users\Asus>ping 8.8.8.8 -t

Disparando 8.8.8.8 com 32 bytes de dados:
Resposta de 8.8.8.8: bytes=32 tempo=656ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=741ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=802ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=525ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=620ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=706ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=771ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=880ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=580ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=691ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=732ms TTL=118
Resposta de 8.8.8.8: bytes=32 tempo=829ms TTL=118

Estatísticas do Ping para 8.8.8.8:
    Pacotes: Enviados = 12, Recebidos = 12, Perdidos = 0 (0% de
    perda),
Aproximar um número redondo de vezes em milissegundos:
    Mínimo = 525ms, Máximo = 880ms, Média = 711ms
Control-C
^C
C:\Users\Asus>arp -a

Interface: 10.29.76.186 --- 0xc
Endereço IP      Endereço físico      Tipo
10.29.76.185      00-20-0e-10-88-4d    dinâmico
10.29.76.191      ff-ff-ff-ff-ff-ff    estático
224.0.0.2         01-00-5e-00-00-02    estático
224.0.0.22        01-00-5e-00-00-16    estático
224.0.0.251       01-00-5e-00-00-fb    estático
224.0.0.252       01-00-5e-00-00-fc    estático
239.255.255.250   01-00-5e-7f-ff-fa    estático
255.255.255.255   ff-ff-ff-ff-ff-ff    estático

C:\Users\Asus>UIV0-PER-23040424-CE---PARACURU-CE_
```

```
Telnet10.29.76.185
Satellite <DUB> TX Configuration
Auto start : Enabled
BUPC status : Disabled
IDU Output Power : -18 dBm
IDU Max Output Power: 0.0 dBm
Default CW Frequency: 0.000000 GHz
QIM mode : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status
State : On <DUB-RCS2>
IDU Output Power : -17.8 dBm
Es/No : 12.5 dB
Header Compression : Disabled
Timing correction : -52 us (248591 us)
Frequency correction: 010 Hz
#

Satellite <DUB> RX Configuration
Auto start : Enabled
Max Signalling MODCOD : 23 16APSK-9/10
Max Traffic MODCOD : 28 32APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Maps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 30.000000 Yes 11.592000 DUB-S2 102 0 0.0 E

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326, T14R Beam
Frequency : 11.592000 GHz
Symbol Rate : 29.999945 Maps
S2 ModCod
- receiving : 7 QPSK-3/4
- current max : 22 16APSK-8/9
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.5 dB
Input Power : -33 dBm
#
```

SatLink VSAT

Não seguro | 10.29.76.185/wmi/dwp/index\_page... Pausada

Apps Bookmarks Chat com vídeo, com Mensagens de Aniv...

SatLink

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Tools

Help

Introduction

Status

Configuration

Device Status

Model	SatLink 2000
Software Version	17.0.4.114
LAN MAC Address	00:20:0e:10:88:4d
DVB MAC Address	00:20:0e:10:88:4d
System Up Time	0 days, 00:07:47
CPU Load	29%
System Name	VIVO-PER-23040424-CE
System Contact	
System Location	CE

You are logged in as install (2) on VIVO-PER-23040424-CE

© Copyright 2006-2018 NSSGlobal Technologies AS ®. All Rights Reserved.

PT 11:53 07/11/2018

```
10.29.48.1 - PuTTY

Satellite (DVB) TX Configuration
-----
Auto start      : Enabled
IDU Output Power : -22 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.7 dBm
EIRP           : 47.0 dBW
Default CW Frequency: 0.000000 GHz
ATM mode       : VC-Mux
Header Compression : None

Satellite (DVB) Transmitter Status
-----
State          : On (DVB-RCS2)
IDU Output Power : -15.9 dBm
ODU Output Power : 33.4 dBm
EIRP           : 46.7 dBW
Es/No          : 13.0 dB
Header Compression : Disabled
Timing correction : -115 us (250088 us)
Frequency correction: 910 Hz
$
```