

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira


Cliente: Vivo

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-26165538-PE

Link kbps
256K/128K

Plataforma
VSAT

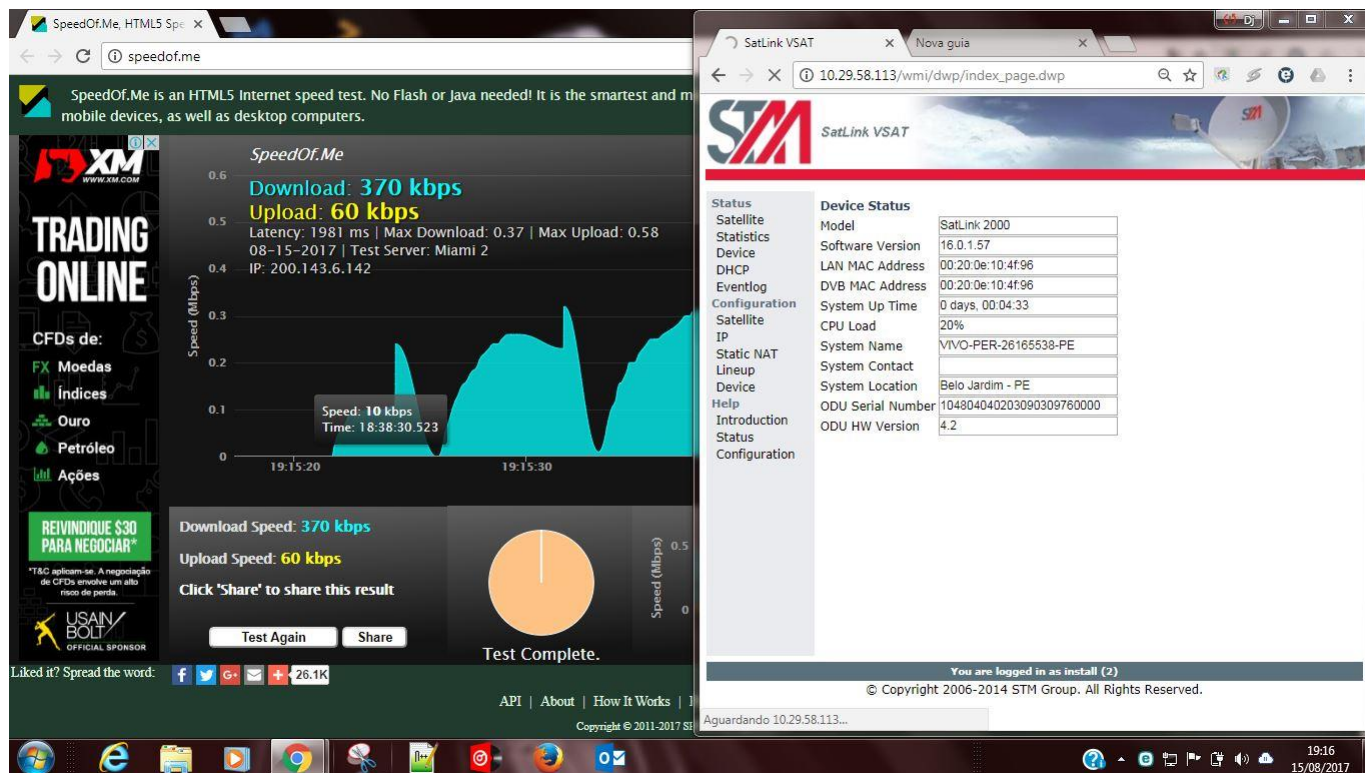

Telnet 10.29.58.113
SW ID 120208, Revision 16.0.1 Build 57

Satellite <DUB> TX Configuration
Auto start : Enabled
LDU Output Power : -20 dBm
LDU Max Output Power : 0.0 dBm
ODU Output Power : 32.7 dBm
EIRP : 46.0 dBW
Default CW Frequency : 0.000000 GHz
ATM mode : UC-Mux
Header Compression : None

Satellite <DUB> Transmitter Status
State : On <DUB-RCS2>
LDU Output Power : -13.6 dBm
ODU Output Power : 32.6 dBm
EIRP : 45.9 dBW
Es/No : 13.0 dB
Header Compression : Disabled
Timing correction : -140 us (250971 us)
Frequency correction : -140 Hz

Satellite <DUB> RX Configuration
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
~ 0 0 Enable 25.333333 12.050000 DUB-S2 102 0 0.0 E
Yes
1 1 15.000000 12.057000 DUB-S2 4 0 0.0 E
Yes

Satellite <DUB> Receiver Status
Rx State : On
DUB State : Forward link up
Network : 1326 T14R Boan
Frequency : 12.049785 GHz
Symbol Rate : 25.332886 Msps
S2 ModCod :
- receiving : 12 8PSK-3/5
- current max : 20 16APSK-4/5
Pilot : On
Frame length : Short
DUB S2 Mode : ACM
DUB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 13.7 dB
Input Power : -22 dBm
#

SatLink VSAT Nova guia
10.29.58.113/wmi/dwp/index_page.dwp
STM SatLink VSAT
Status
Satellite Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration
Device Status
Model
Software Version
LAN MAC Address
DVB MAC Address
System Up Time
CPU Load
System Name
System Contact
System Location
ODU Serial Number
ODU HW Version
SatLink 2000
16.0.1.57
00:20:0e:10:4f:96
00:20:0e:10:4f:96
0 days, 00:04:33
20%
VIVO-PER-26165538-PE
Belo Jardim - PE
104804040203090309760000
4.2
You are logged in as install (2)
© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe
Resposta de 8.8.8.8: bytes=32 tempo=579ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=638ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=698ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=791ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=878ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=915ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=564ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=702ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=725ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=775ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=837ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=859ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=576ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=845ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=746ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=795ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=600ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=648ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=606ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=645ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=656ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=728ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=821ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=831ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=867ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=589ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=710ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=753ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=738ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=865ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=584ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=602ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=664ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=749ms TTL=44
Resposta de 8.8.8.8: bytes=32 tempo=844ms TTL=44

Estatísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 60, Recebidos = 60, Perdidos = 0 (0% de perda),
Aproximar um número redondo de vezes em milissegundos:
Mínimo = 564ms, Máximo = 2274ms, Média = 760ms
Control-C
C:\Users\DjTornados>arp -a
Interface: 10.29.58.114 --- 0xb
Endereço IP Endereço físico Tipo
10.29.58.113 00-20-0e-10-4f-96 dinâmico
10.29.58.119 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.254 01-00-5e-00-00-fb estático
224.0.0.252 01-00-5e-00-00-fc estático
224.0.1.60 01-00-5e-00-01-3c estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

SatLink VSAT Nova guia
10.29.58.113/wmi/dwp/index_page.dwp
STM SatLink VSAT
Status
Satellite Statistics
Device
DHCP
Eventlog
Configuration
Satellite
IP
Static NAT
Lineup
Device
Help
Introduction
Status
Configuration
Device Status
Model
Software Version
LAN MAC Address
DVB MAC Address
System Up Time
CPU Load
System Name
System Contact
System Location
ODU Serial Number
ODU HW Version
SatLink 2000
16.0.1.57
00:20:0e:10:4f:96
00:20:0e:10:4f:96
0 days, 00:04:33
20%
VIVO-PER-26165538-PE
Belo Jardim - PE
104804040203090309760000
4.2
You are logged in as install (2)
© Copyright 2006-2014 STM Group. All Rights Reserved.