



# TERMO DE ACEITE TÉCNICO

Solicitante: VIVO

NOC/Operador: Vitor Hugo


Cliente: VIVO

Empresa EMC  
Brasil

VSAT-ID  
VIVO-PER-22004076-PI

Link kbps  
1024k/256k

Plataforma VSAT

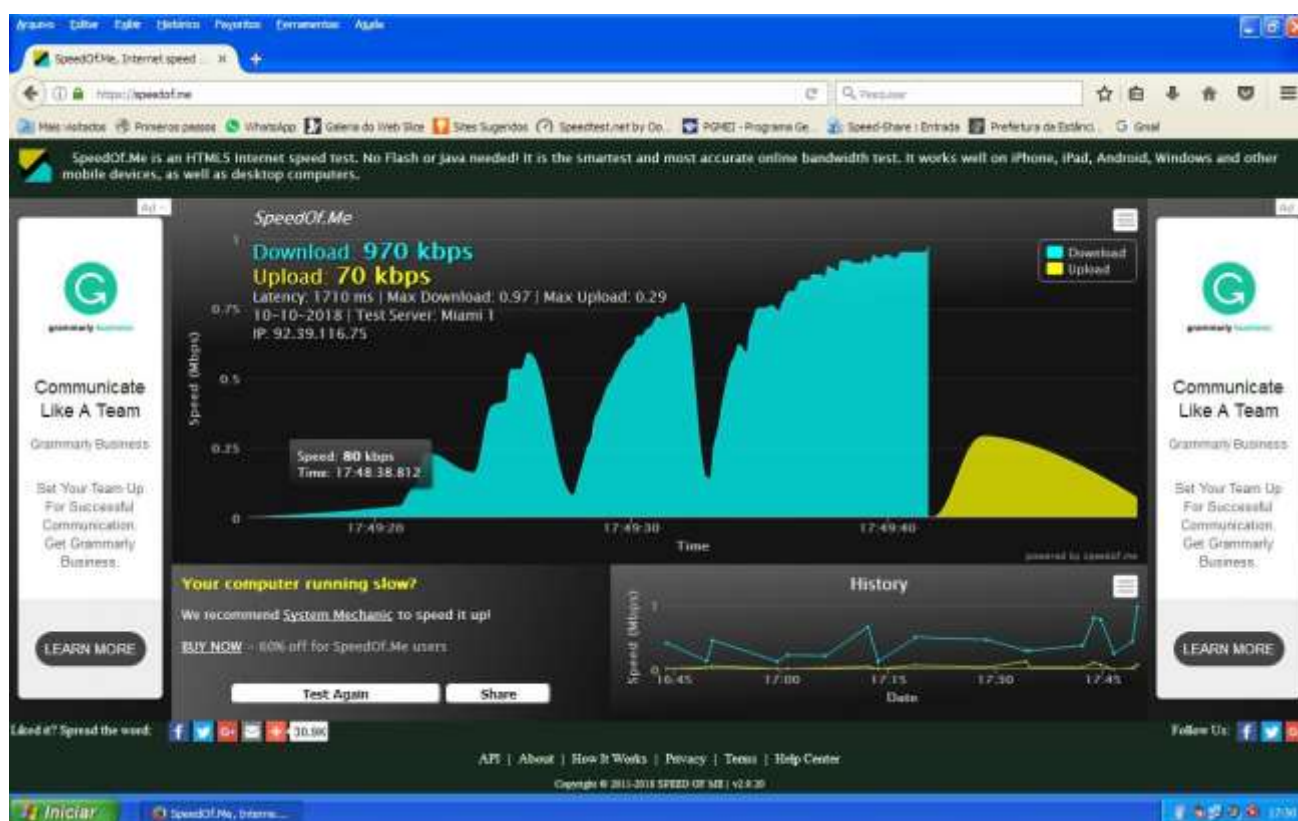



The screenshot displays the SatLink VSAT web interface. The top navigation bar includes links for Home, Login, Tools, Settings, Parameters, and About. The main content area is divided into two sections: 'Device Status' on the left and 'Satellite (DVB) TX Configuration' on the right. The 'Device Status' section shows a table with columns for Model, Software Version, LAN MAC Address, DVB MAC Address, System Up Time, CPU Load, System Name, System Contact, and System Location. The 'Satellite (DVB) TX Configuration' section shows a table with columns for Mode, Power, Frequency, and Compression. The interface is running on a VIVO-PER-22004076-PI system.

Model	Software Version	LAN MAC Address	DVB MAC Address	System Up Time	CPU Load	System Name	System Contact	System Location
SatLink 2000	17.0.4.114	00:20:0e:10:8e:b0	00:20:0e:10:8e:b0	0 days, 00:09:03	28%	VIVO-PER-22004076-PI		Esperantina - PE

Mode	Power	Frequency	Compression
Auto start	Enabled	11.592888 GHz	None
WPC status	Disabled		
DVB Output Power	-20 dBm		
IMD Max Output Power	0.8 dBm		
Default GM Frequency	0.000000 GHz		
RTN mode	PC-700		
Header Compression	None		

You are logged in as install (2) on VIVO-PER-22004076-PI

© Copyright 2006-2018 H2SO Global Technologies AG - 3