






Fruit Machine

Use fruit as computer input.



- 1) Register/login at <https://scratch.mit.edu>
- 2) Add the **Makey Makey** extension.
- 3) Plug the USB cable into your Makey.
- 4) Plug the other end of the cable into a USB socket on your computer.

*The Makey is all about making electrical **circuits**. Make a circuit from **earth**, through conductive objects, back to a Makey **input**. **Conductive** objects include wires, fruit, and your body!*

- 5) Put on the wrist strap and connect the “crocodile clip” onto **earth** at the bottom of the Makey.
- 6) Touch any of the Makey inputs. A **green light** next to the inputs will light up when you have made a **circuit**.

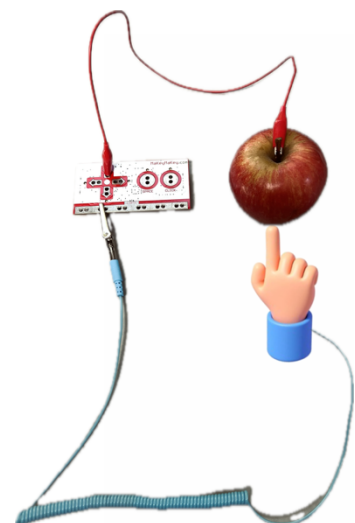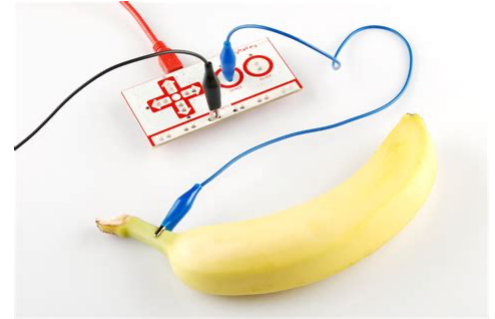

- 7) Connect a crocodile clip to a pair of holes on one of the Makey inputs.
- 8) Choose a fruit and poke a paper clip into it – this makes a better electrical connection.
- 9) Clip the other end of the “crocodile clip” cable onto the paper clip.
- 10) Choose a sprite graphic that matches your fruit.
- 11) Add code to your sprite (below) that jiggles the icon when you touch the matching fruit. Make sure you select the correct **Makey input key**.

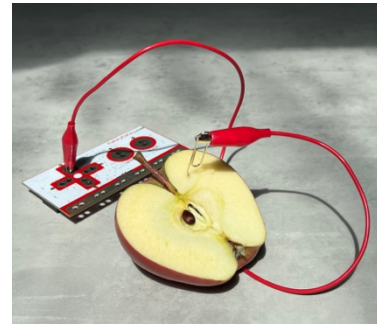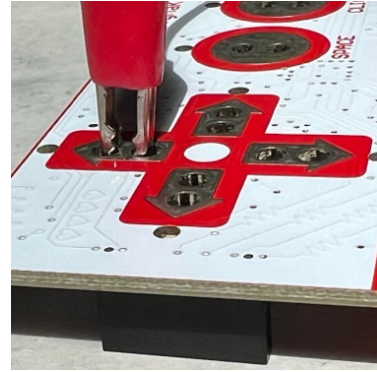


*Touch the fruit – **does it jiggle?***

Repeat steps 7 to 11 above for different fruit.

Try adding appropriate sound-effects!

*Remember to **Save** your code.*

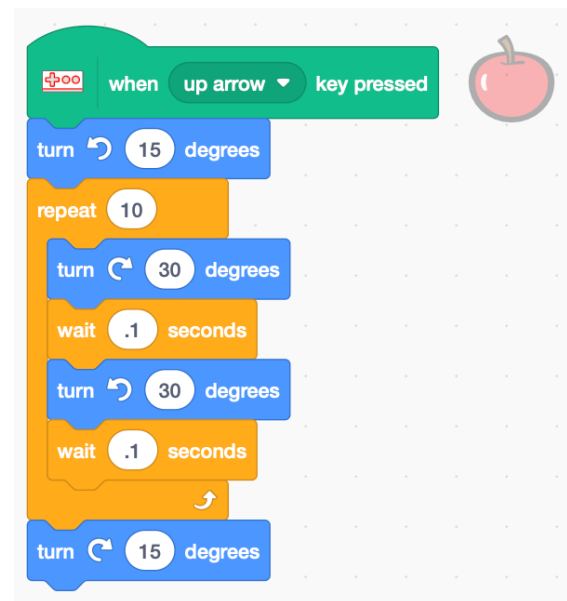

Materials:

- Makey Makey
- Anti-static wrist straps help make the circuit
- Paper clips make a good electrical connection with the fruit
- Bananas, apples, oranges (halved or quartered for a better connection)