

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Cunha


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-31157538-MG

Link kbps
256k/128k

Plataforma
VSAT

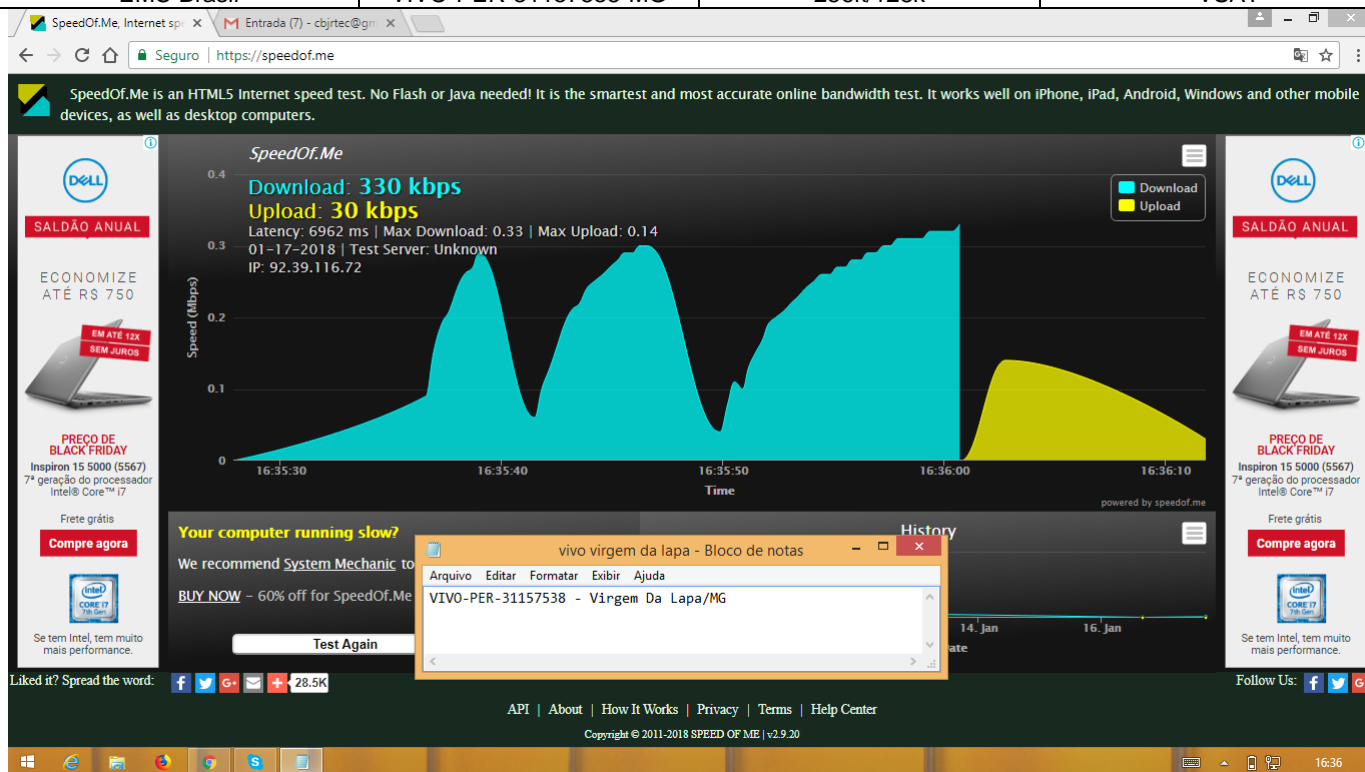

```

C:\Windows\system32\cmd.exe

IDU Max Output Power: 0.0 dBm
ODU Output Power: 33.5 dBm
EIRP: 46.5 dBm
Default CW Frequency: 0.000000 GHz
RIM mode: UC-Mux
Header Compression: None

Satellite <DUB> Transmitter Status
State: On <DUB-RCS2>
IDU Output Power: -19.9 dBm
ODU Output Power: 34.3 dBm
EIRP: 47.3 dBm
Es/No: -14.5 dB
Header Compression: Disabled
Timing correction: -140 us <249346 us>
Frequency correction: 160 Hz

Satellite <DUB> RX Configuration
Auto start: Enabled
Max Traffic MODCOD: 23 16APSK-9/10
RX watchdog: 15 minute

Idx Pri SymbRate[Mbps] Freq[GHz] Mode PopId SatId Pos SatName
Name Enable
* 0 0 30.000000 12.050000 DUB-S2 102 0 0.0 E
1 1 25.333333 12.050000 DUB-S2 4 0 0.0 E


Satellite <DUB> Receiver Status
Rx State: On
DUB State: Forward link up
Network: 1326 Ti4R Bean
Frequency: 12.049907 GHz
Symbol Rate: 29.999995 Mbps
S2 ModCod:
- receiving: 7 QPSK-3/4
- current max: 22 16APSK-0/9
Pilot: On
Frame length: Short
DUB S2 Mode: ACM
DUB S2 Stream type: MPEG-TS
Roll off: 0.20
SNR: 14.9 dB
Input Power: -24 dBm

Conexão ao host perdida.

C:\Users\CBJRTEC>arp -a

Interface: 10.29.66.106 --- 0x3
Endereço IP: 10.29.66.105
Endereço físico: 00-20-0e-10-5c-e0
Tipo: dinâmico

```

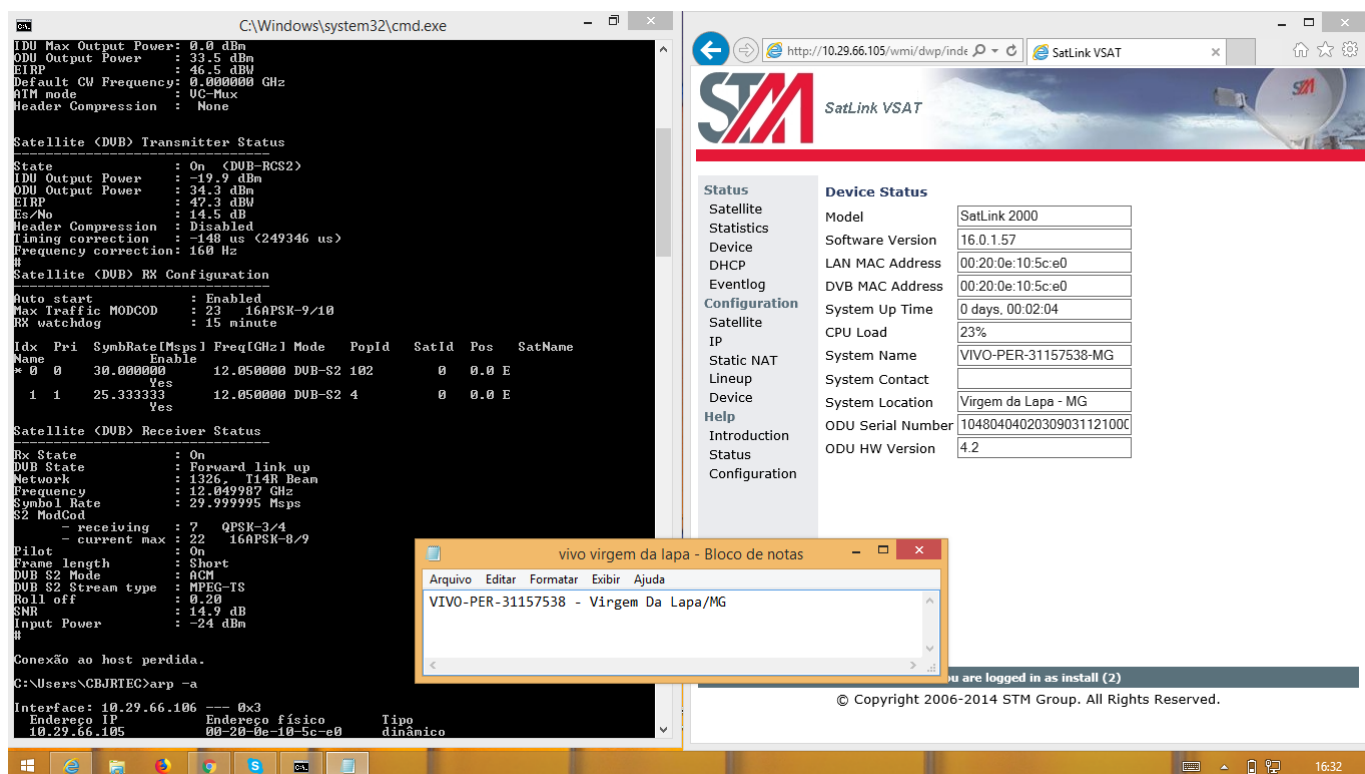

SatLink VSAT

Status
Satellite: On
Statistics: On
Device: On
DHCP: On
Eventlog: On
Configuration: On
Satellite: On
IP: On
Static NAT: On
Lineup: On
Device: On
Help: On
Introduction: On
Status: On
Configuration: On

Device Status

Model	SatLink 2000
Software Version	16.0.1.57
LAN MAC Address	00:20:0e:10:5c:e0
DVB MAC Address	00:20:0e:10:5c:e0
System Up Time	0 days, 00:02:04
CPU Load	23%
System Name	VIVO-PER-31157538-MG
System Contact	
System Location	Virgem da Lapa - MG
ODU Serial Number	10480404020309031121000
ODU HW Version	4.2

© Copyright 2006-2014 STM Group. All Rights Reserved.

C:\Windows\system32\cmd.exe

Resposta de 8.8.8.8: bytes=32 tempo=977ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=945ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1019ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1049ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1062ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1063ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1065ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1063ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1135ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1058ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1093ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1029ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1051ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1073ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1059ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1068ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1053ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2866ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1083ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=2256ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=951ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=992ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1027ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1077ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1056ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1059ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1066ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1087ms TTL=49

Resposta de 8.8.8.8: bytes=32 tempo=1039ms TTL=49

Estadísticas do Ping para 8.8.8.8:
Pacotes: Enviados = 36, Recebidos = 36, Perdidos = 0 (0% de perda),
Resposta de 8.8.8.8: Aproximar um número redondo de vezes em milissegundos:
Mínimo = 997ms, Máximo = 2866ms, Média = 1130ms
bytes=32 Control-C
C:\Users\CBJRTEC>arp -a


Interface: 10.29.66.106 --- 0x3
Endereço IP Endereço físico Tipo
10.29.66.105 00-20-0e-10-5c-e0 dinâmico
10.29.66.111 ff-ff-ff-ff-ff-ff estático
224.0.0.2 01-00-5e-00-00-02 estático
224.0.0.22 01-00-5e-00-00-16 estático
224.0.0.251 01-00-5e-00-00-fb estático
224.0.0.252 01-00-5e-00-00-fc estático
239.255.255.250 01-00-5e-7f-ff-fa estático
255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Users\CBJRTEC>

http://10.29.66.105/wmi/dwp/index_page... SatLink VSAT

STM

SatLink VSAT



Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model

Software Version

LAN MAC Address

DVB MAC Address

System Up Time

CPU Load

System Name

System Contact


System Location

ODU Serial Number

ODU HW Version

SatLink 2000
16.0.1.57
00:20:0e:10:5c:e0
00:20:0e:10:5c:e0
0 days, 00:02:04
23%
VIVO-PER-31157538-MG
Virgem de Lapa - MG
10480404020309031121000
4.2

You are logged in as install (2)
© Copyright 2006-2014 STM Group. All Rights Reserved.



16:34