


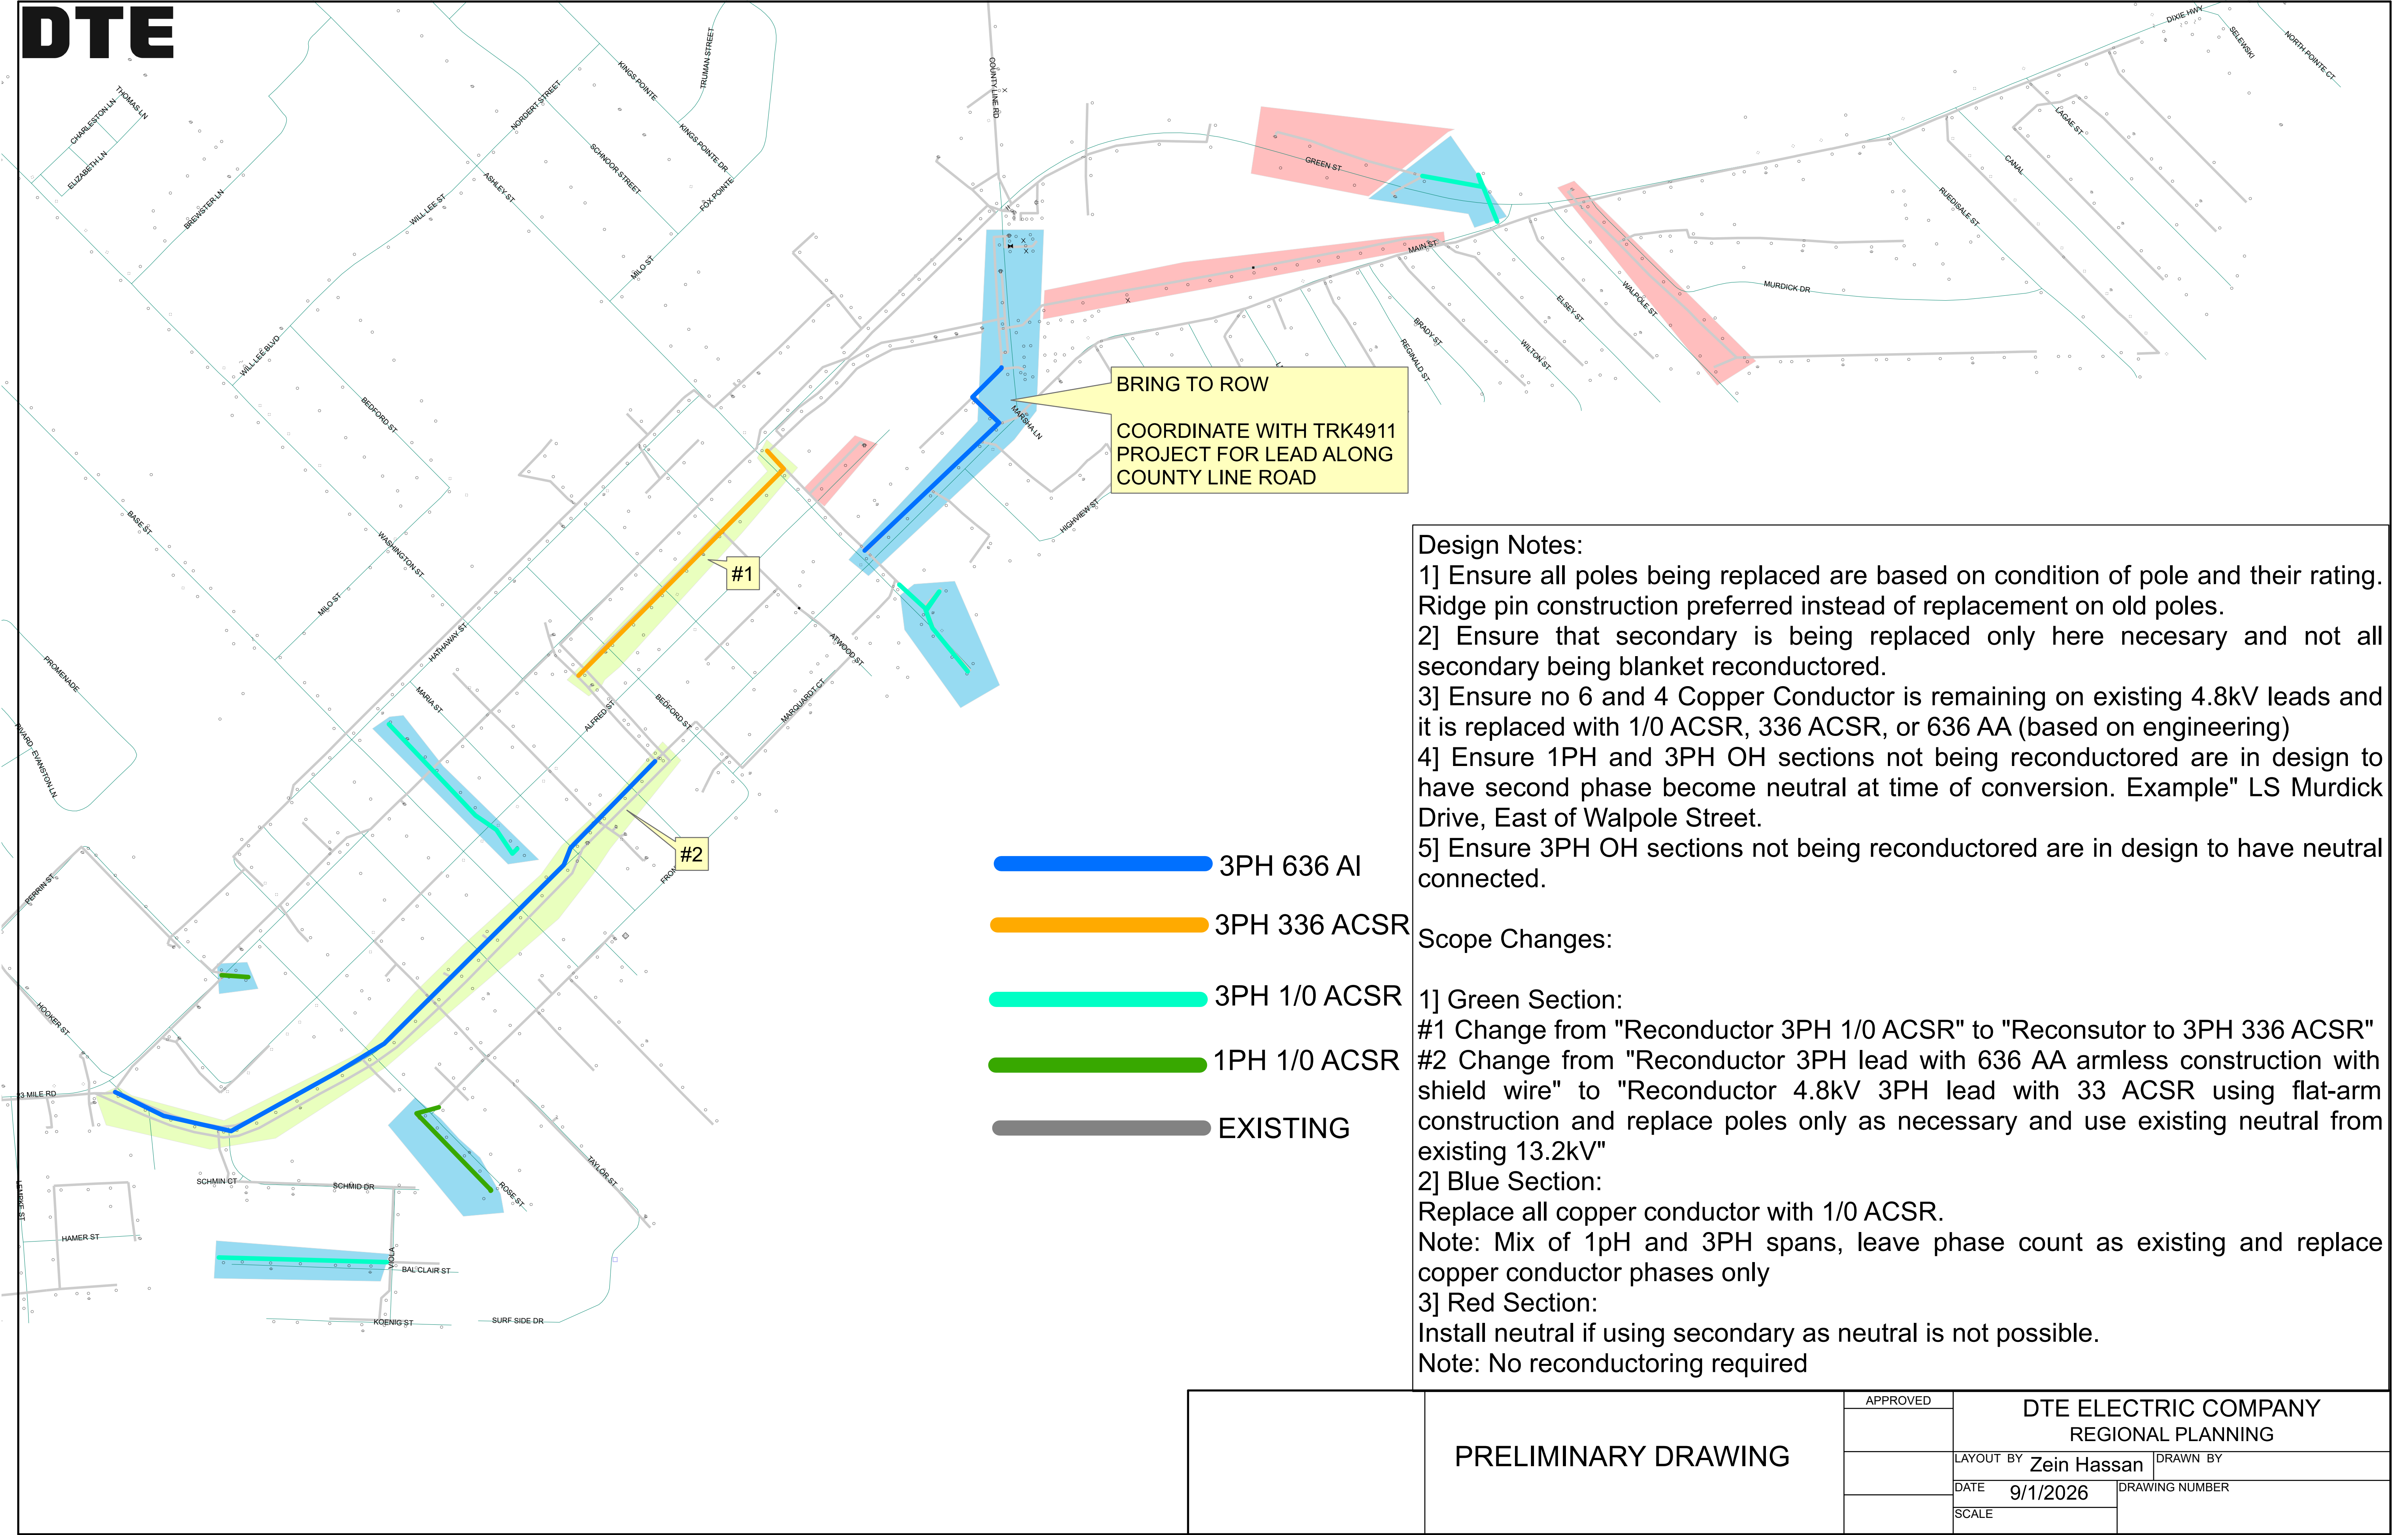

Design Notes:

1] Ensure all poles being replaced are based on condition of pole and their rating. Ridge pin construction preferred instead of replacement on old poles.

2] Ensure that secondary is being replaced only here necessary and not all secondary being blanket reconnected.

3] Ensure no 6 and 4 Copper Conductor is remaining on existing 4.8kV leads and it is replaced with 1/0 ACSR, 336 ACSR, or 636 AA (based on engineering)

4] Ensure 1PH and 3PH OH sections not being reconnected are in design to have second phase become neutral at time of conversion. Example" LS Murdick Drive, East of Walpole Street.

5] Ensure 3PH OH sections not being reconnected are in design to have neutral connected.

Scope Changes:

1] Green Section:
#1 Change from "Reconductor 3PH 1/0 ACSR" to "Reconsutor to 3PH 336 ACSR"
#2 Change from "Reconductor 3PH lead with 636 AA armless construction with shield wire" to "Reconductor 4.8kV 3PH lead with 33 ACSR using flat-arm construction and replace poles only as necessary and use existing neutral from existing 13.2kV"

2] Blue Section:
Replace all copper conductor with 1/0 ACSR.
Note: Mix of 1pH and 3PH spans, leave phase count as existing and replace copper conductor phases only

3] Red Section:
Install neutral if using secondary as neutral is not possible.
Note: No reconductoring required

PRELIMINARY DRAWING	APPROVED		DTE ELECTRIC COMPANY REGIONAL PLANNING	
			LAYOUT BY	Zein Hassan
			DATE	9/1/2026
			SCALE	