

TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Guilherme Henrique


Cliente: VIVO

Empresa
EMC Brasil

VSAT-ID
VIVO-PER-35637932-SP

Link kbps
256k/128k

Plataforma
VSAT

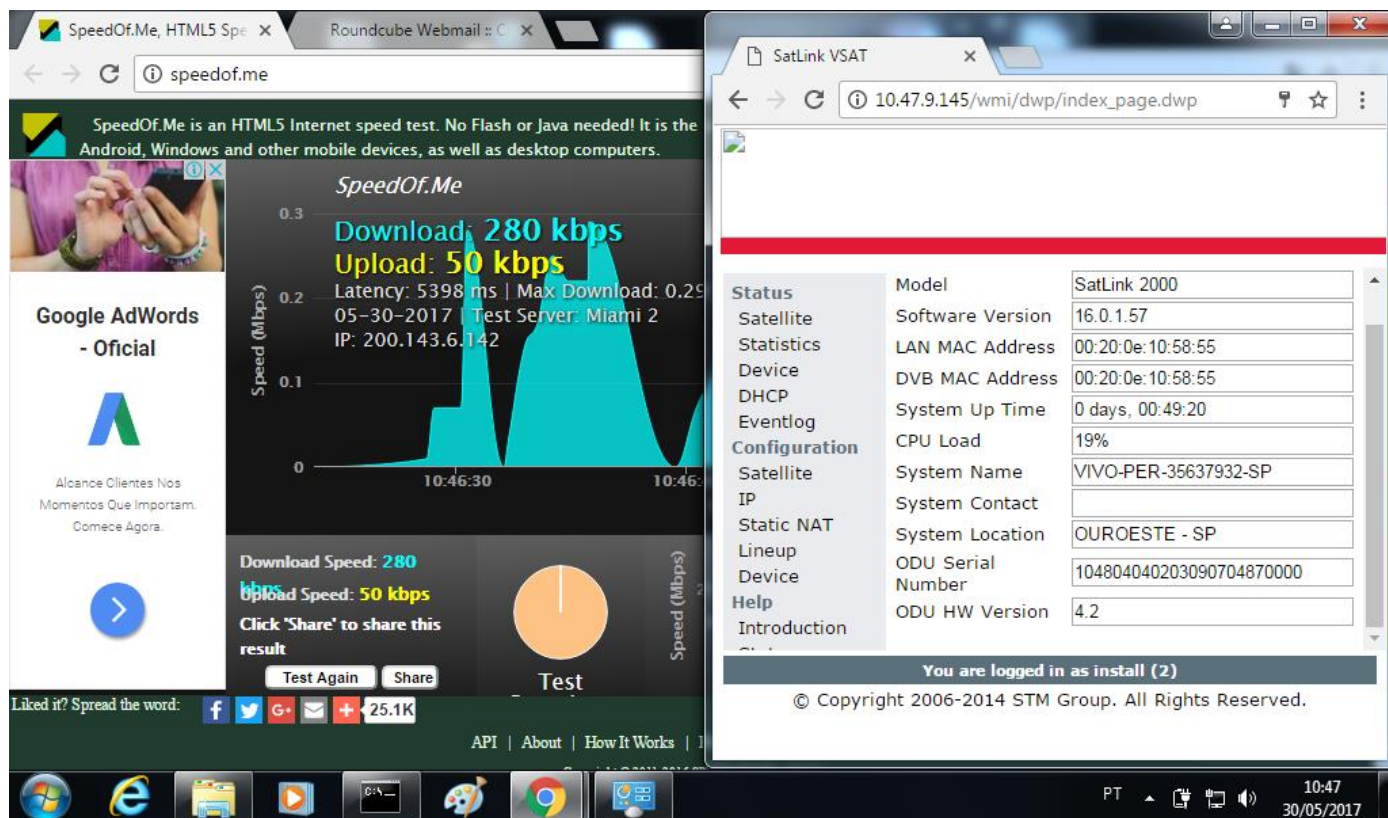

SatLink VSAT

10.47.9.145/wmi/dwp/index_page.dwp

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model: SatLink 2000

Software Version: 16.0.1.57

LAN MAC Address: 00:20:0e:10:58:55

DVB MAC Address: 00:20:0e:10:58:55

System Up Time: 0 days, 00:49:20

CPU Load: 19%

System Name: VIVO-PER-35637932-SP

System Contact:

System Location: OUROESTE - SP

ODU Serial Number: 104804040203090704870000

ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

Telnet 10.47.9.145

Satellite <DUB> Receiver Status

Rx State: On

DUB State: Forward link up

Network: 1326, T14R Beam

Frequency: 12.058985 GHz

Symbol Rate: 14.999925 Msps

S2 ModCod

- receiving: 15 8PSK-5/6

- current max: 20 16APSK-4/5

Pilot: On

Frame length: Short

DUB S2 Mode: ACM

DUB S2 Stream type: MPEG-TS

Roll off: 0.20

SNR: 14.2 dB

Input Power: -20 dBm

#

Satellite <DUB> TX Configuration

Auto start: Enabled

IDU Output Power: -20 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power: 32.7 dBm

EIRP: 46.0 dBW

Default CW Frequency: 14.125850 GHz

ATM mode: UC-Mux

Header Compression: None

Satellite <DUB> Transmitter Status

State: On <DUB-RCS2>

IDU Output Power: -16.9 dBm

ODU Output Power: 32.3 dBm

EIRP: 45.6 dBW

Es/No: 13.0 dB

Header Compression: Disabled

Timing correction: -100 us <253778 us>

Frequency correction: -90 Hz

#

PT 10:43 30/05/2017

SatLink VSAT

10.47.9.145/wmi/dwp/index_page.dwp

Status

Satellite

Statistics

Device

DHCP

Eventlog

Configuration

Satellite

IP

Static NAT

Lineup

Device

Help

Introduction

Status

Configuration

Device Status

Model: SatLink 2000

Software Version: 16.0.1.57

LAN MAC Address: 00:20:0e:10:58:55

DVB MAC Address: 00:20:0e:10:58:55

System Up Time: 0 days, 00:08:11

CPU Load: 24%

System Name: VIVO-PER-35637932-SP

System Contact:

System Location: OUROESTE - SP

ODU Serial Number: 104804040203090704870000

ODU HW Version: 4.2

You are logged in as install (2)

© Copyright 2006-2014 STM Group. All Rights Reserved

cmd - Atalho

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo=2ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Resposta de 10.47.9.145: bytes=32 tempo<1ms TTL=64

Estatísticas do Ping para 10.47.9.145:

Pacotes: Enviados = 154, Recebidos = 154, Perdidos = 0 <perda>.

Aproximar um número redondo de vezes em milissegundos:

Mínimo = 0ms, Máximo = 2ms, Média = 0ms

Control-C

C:\Windows\System32>arp -a

Interface: 10.47.9.146 --- 0xf

Endereço IP Endereço físico Tipo

10.47.9.145 00-20-0e-10-58-55 dinâmico

10.47.9.151 ff-ff-ff-ff-ff-ff estático

224.0.0.2 01-00-5e-00-00-02 estático

224.0.0.22 01-00-5e-00-00-16 estático

224.0.0.251 01-00-5e-00-00-fb estático

224.0.0.252 01-00-5e-00-00-fc estático

239.255.255.250 01-00-5e-7f-ff-fa estático

239.255.255.253 01-00-5e-7f-ff-fd estático

255.255.255.255 ff-ff-ff-ff-ff-ff estático

C:\Windows\System32>_

PT 09:06 30/05/2017