


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogerio Momi Frias Cliente: VIVO

> **Empresa** VSAT-ID Link kbps **Plataforma EMC** Brasil VIVO-PER-23056940-CE 256/128 **VSAT**

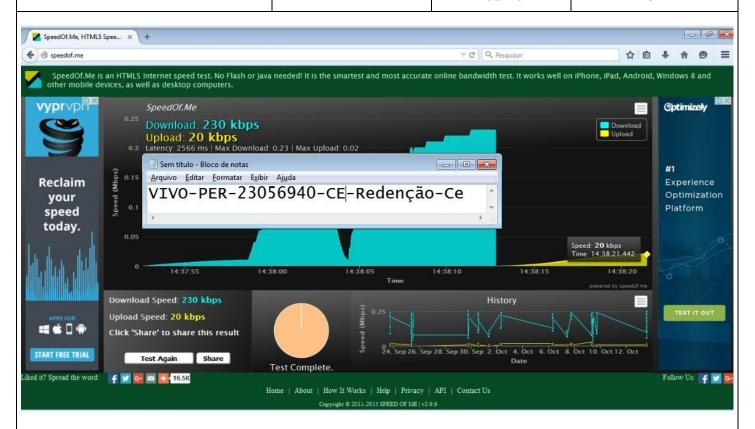

Satellite (DVB) RX Configuration

-----Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable 12.055825 DVB-S2 4 * 0 0 9.320000 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

: 1326, GlobalIP@Telstar-14R Network

: 12.055595 GHz Frequency Symbol Rate : 9.319893 Msps

S2 ModCod

- receiving : 13 8PSK-2/3 - current max : 23 16APSK-9/10

Pilot Frame length : Short DVB S2 Mode : ACM : 0.25 Roll off SNR : 14.3 dB : -30 dBm Input Power

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -23 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 33.9 dBm : 47.0 dBW EIRP

Default CW Frequency: 14.125850 GHz

ATM mode : VC-Mux Header Compression: None

Satellite (DVB) Transmitter Status

State : On (TDMA) IDU Output Power : -24.4 dBm ODU Output Power : 33.4 dBm : 46.7 dBW : 14.0 dB EIRP Eb/No Header Compression: Disabled

Timing correction : -223 us (260939 us)

Frequency correction: -280 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=2050 ms 64 bytes from 8.8.8.8: time=910 ms 64 bytes from 8.8.8.8: time=560 ms 64 bytes from 8.8.8.8: time=1090 ms 64 bytes from 8.8.8.8: time=990 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 560/1110/2050 ms