


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Bruno Carvalho de Sá Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-25077961-PB256/128VSAT

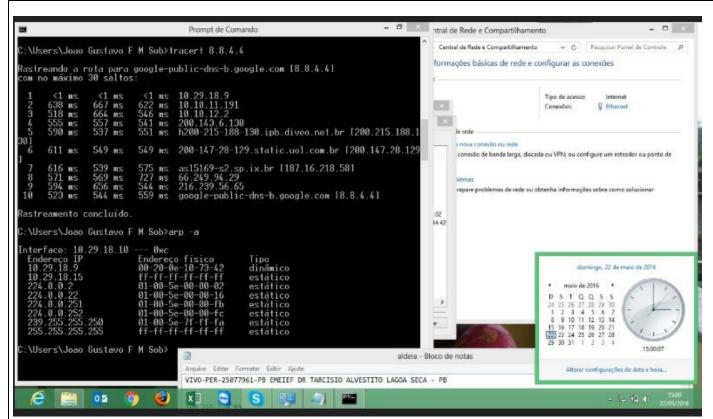

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.7 dBm
EIRP : 47.0 dBW
Default CW Frequency: 14.125850 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS)
IDU Output Power : -18.4 dBm
ODU Output Power : 34.6 dBm
EIRP : 47.9 dBW
Es/No : 14.0 dB
Header Compression : Disabled

Timing correction : -224 us (262199 us)

Frequency correction: 40 Hz

dvb rx show

```
Satellite (DVB) RX Configuration
______
Auto start : Enabled
Max Traffic MODCOD : 23 16APSK-9/10
RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName
                                                                                 Name
Enable
* 0 0
          9.320000 12.055825 DVB-S2 102 0 0.0 E
Yes
Satellite (DVB) Receiver Status
_____
Rx State : On
DVB State : Forward link up
Network : 1326, GlobalIP@Telstar-14R
Frequency : 12.055996 GHz
Symbol Rate : 9.320064 Msps
S2 ModCod
    - receiving : 16 8PSK-8/9
      - current max : 16 8PSK-8/9
               : On
Pilot
Frame length : Short
DVB S2 Mode : ACM
                   : ACM
DVB S2 Mode
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR
                   : 14.2 dB
Input Power : -23 dBm
IP DVB 10.50.1.161 /32
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=740 ms
64 bytes from 8.8.8.8: time=730 ms
64 bytes from 8.8.8.8: time=700 ms
64 bytes from 8.8.8.8: time=730 ms
64 bytes from 8.8.8.8: time=700 ms
--- ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 700/710/740 ms
```



