


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Renan Borges Sousa Cliente: VIVO

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-31266795-MG
 256/128
 VSAT

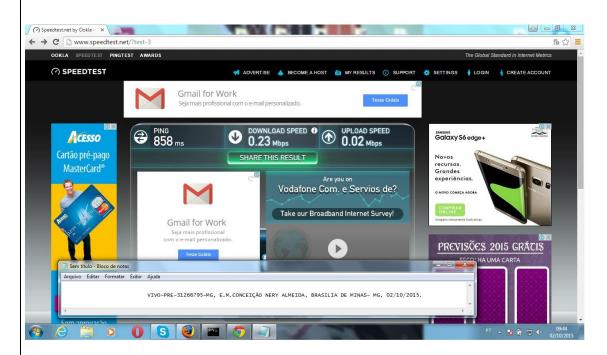

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes
1 1 0.000000 0.000000 DVB-S2 2 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055620 GHz Symbol Rate : 9.319902 Msps

S2 ModCod

- receiving : 15 8PSK-5/6 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.25

```
SNR
                   : 13.9 dB
                  : -29 dBm
Input Power
Satellite (DVB) TX Configuration
_____
Auto start : Enabled IDU Output Power : -30 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 34.7 dBm
                  : 48.0 dBW
EIRP
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : None
Satellite (DVB) Transmitter Status
_____
State : On (TDMA)

IDU Output Power : -16.2 dBm

ODU Output Power : 34.6 dBm
EIRP
                   : 47.9 dBW
Eb/No
                   : 13.5 dB
Header Compression : Disabled
Timing correction : -123 us (260850 us)
Frequency correction: -390 Hz#
IP DVB 10.50.0.16/32
#ping 8.8.8.8
# 64 bytes from 8.8.8.8: time=860 ms
64 bytes from 8.8.8.8: time=590 ms
64 bytes from 8.8.8.8: time=660 ms
64 bytes from 8.8.8.8: time=800 ms
64 bytes from 8.8.8.8: time=570 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 570/690/860 ms
```