


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Jefferson de Souza Marques Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-31028533-MG256/128VSAT

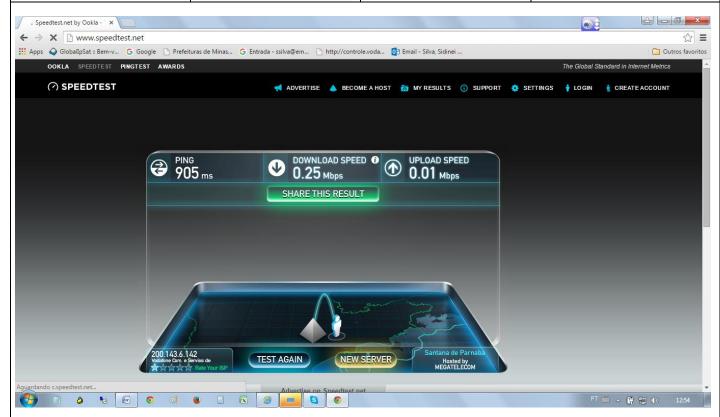

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055896 GHz Symbol Rate : 9.319981 Msps

S2 ModCod

- receiving : 1 QPSK-1/4 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short

DVB S2 Mode : ACM

Roll off : 0.25

SNR : 14.9 dB

Input Power : -31 dBm

```
Satellite (DVB) TX Configuration
-----
                   : Enabled
Auto start
Auto start : Enabled IDU Output Power : -19 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 34.7 dBm
                   : 48.0 dBW
EIRP
Default CW Frequency: 14.125500 GHz
ATM mode
                   : VC-Mux
Header Compression : None
Satellite (DVB) Transmitter Status
_____
State : On (TDMA)

IDU Output Power : -15.7 dBm

ODU Output Power : 34.6 dBm
EIRP
                   : 47.9 dBW
Eb/No
                   : 14.5 dB
Header Compression : Disabled
Timing correction : 247 us (261334 us)
Frequency correction: -180 Hz
IP DVB 10.53.0.175/32
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=880 ms
64 bytes from 8.8.8.8: time=670 ms
64 bytes from 8.8.8.8: time=540 ms
64 bytes from 8.8.8.8: time=750 ms
64 bytes from 8.8.8.8: time=700 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 540/700/880 ms
```