


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Wallace Teixeira Cliente: Vivo

 Empresa
 VSAT-ID
 Link kbps
 Plataforma

 EMC Brasil
 VIVO-PER-27010902-AL
 256K/128K
 VSAT

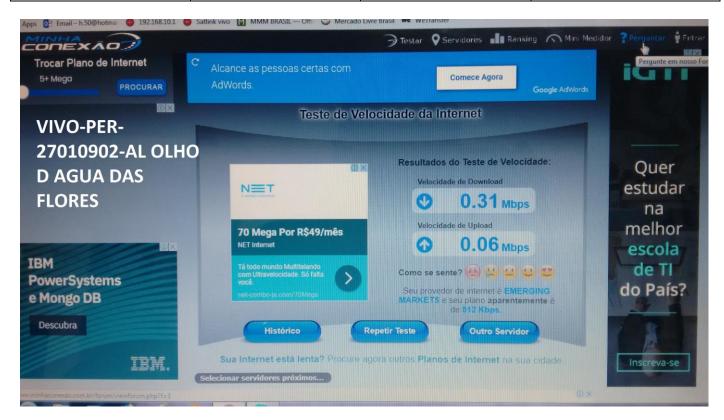

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -15 dBm IDU Max Output Power: 0.0 dBm

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (DVB-RCS2)

IDU Output Power : -15.1 dBm Es/No : 11.0 dB Header Compression : Disabled

Timing correction : -43 us (249761 us)

Frequency correction: 190 Hz

dvb rx show

Satellite (DVB) RX Configuration

Auto start : Enabled

Max Traffic MODCOD : 23 16APSK-9/10

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId SatId Pos SatName

Name Enable

* 0 0 30.000000 12.050000 DVB-S2 102 0 0.0 E

Yes

Satellite (DVB) Receiver Status

Rx State : On

DVB State : Forward link up
Network : 1326, T14R Beam
Frequency : 12.049897 GHz
Symbol Rate : 29.999549 Msps

S2 ModCod

- receiving : 12 8PSK-3/5 - current max : 22 16APSK-8/9

Pilot : On
Frame length : Short
DVB S2 Mode : ACM
DVB S2 Stream type : MPEG-TS
Roll off : 0.20
SNR : 15.6 dB
Input Power : -38 dBm

