



# TERMO DE ACEITE TÉCNICO

**Solicitante:** ATI - Agência de Tecnologia da Informação do Estado do Piauí

**NOC/Operadora:** Guilherme Cunha

**Técnico Instalador:** marcos antonio dos santos Marcos

**Contato:** 11 986829171

**Email:** marcostorre2017@gmail.com

**ATI:** Wesley Souza

**Responsável/cliente:** Rafael Junior Rocha Lustosa

<b>Orgão:</b> SEDUC	<b>Unidade:</b> Unidade Escolar Cosma Ramos de Sousa	<b>Data Instalação</b> 08/10/2018	<b>Data Ativação</b> 08/10/2018
<b>Operadora</b> Global Eagle	<b>VSAT-ID</b> ATI-ES-0127-IND	<b>Porta kbps</b> 4096/512	<b>Tipo</b> Indoor

Piauí, 08 de Outubro de 2018

## 1 – Local da Instalação



## 2 – Configurações do Modem

# device show

System Information:

Name : ATI-ES-0127-IND

Location : PI

Contact :  
System Up time : 0 days, 16:39:37  
CPU Load : 8%  
System time(UTC) : 09 October 2018 07:35:48  
Broadcast Message : not set

HW:

Model : SatLink 2000  
HW ID : 120033  
Main board ID : 120026 R6.2

MAC addresses:

LAN : 00:20:0e:10:8c:be  
Satellite (DVB) : 00:20:0e:10:8c:be

# dvb tx show

Satellite (DVB) TX Configuration

-----  
Auto start : Enabled  
BUPC status : Disabled  
IDU Output Power : -19 dBm  
IDU Max Output Power: 0.0 dBm  
Default CW Frequency: 0.000000 GHz  
ATM mode : VC-Mux  
Header Compression : None

Satellite (DVB) Transmitter Status

-----  
State : On (DVB-RCS2)  
IDU Output Power : -19.1 dBm  
Es/No : 13.0 dB  
Header Compression : Disabled  
Timing correction : -129 us (249542 us)  
Frequency correction: 30 Hz  
# dvb rx show

Satellite (DVB) RX Configuration

-----  
Auto start : Enabled  
Max Signalling MODCOD : 23 16APSK-9/10  
Max Traffic MODCOD : 28 32APSK-9/10  
RX watchdog : 15 minute

Idx	Pri	SymbRate[Msp]	Freq[GHz]	Mode	PopId	SatId	Pos	SatName	Name	Enable
* 0	0	25.000000	11.628079	DVB-S2	105	0	0.0 E		Yes	

Satellite (DVB) Receiver Status

-----  
Rx State : On  
DVB State : Forward link up  
Network : 1326, ATI-PI  
Frequency : 11.628060 GHz  
Symbol Rate : 24.999661 Msps  
S2 ModCod

- receiving : 1 QPSK-1/4  
- current max : 16 8PSK-8/9

Pilot : On

Frame length : Short

DVB S2 Mode : ACM

DVB S2 Stream type : MPEG-TS

Roll off : 0.25

SNR : 13.1 dB

Input Power : -37 dBm

# arp show

NetAddr	State	MacAddr	If
10.225.1.222	Dynamic	00:90:27:f0:31:16	1

# ip show

Interfaces

If	IPAddress	SubnetMask	BroadCastAddr	MTU	Alias	AdminStatus
1	10.225.1.221	255.255.255.252	10.225.1.223	1500	eth0	1
3	172.18.192.129	255.255.255.255	N/A	1540	dvb0	1
4	N/A	N/A	N/A	1500	air0	1

DNS Client Configuration

Primary DNS Server: 209.244.0.3, Secondary DNS Server: 209.244.0.4

Interface Statistics

----- Input -----				----- Output -----				
If	UCast	NUCast	Disc	Octets	UCast	NUCast	Disc	Octets
1	172673	0	72	53168997	285960	484	0	354926516
3	271529	0	92	354340422	62643	0	0	45110022
4	0	0	0	0	0	0	0	0

IP	Receive	Deliver	Errors	InDiscards	Forward	Request	NoRoute	OutDiscards
	442183	183	0	0	346967	815	0	170

Interface Directed Routing Table

In If Out If


-----IP LAC Statistics-----

RPF	Src eq dest	RPF HitCount	Src eq dest HitCount	MfcHitCount (-1/drop classified)
Disabled	Enabled	0	0	0

Routing Table

DestMask	RouteMask	NextHop	If	RtType	Row-Status
0.0.0.0	0.0.0.0	0.0.0.0	3	STATIC	ACTIVE
10.225.1.220	255.255.255.252	0.0.0.0	1	LOCAL	ACTIVE
10.225.129.0	255.255.255.0	10.225.1.222	1	STATIC	ACTIVE
172.18.192.129	255.255.255.255	0.0.0.0	3	LOCAL	ACTIVE

### 3 – Configurações dos Equipamentos

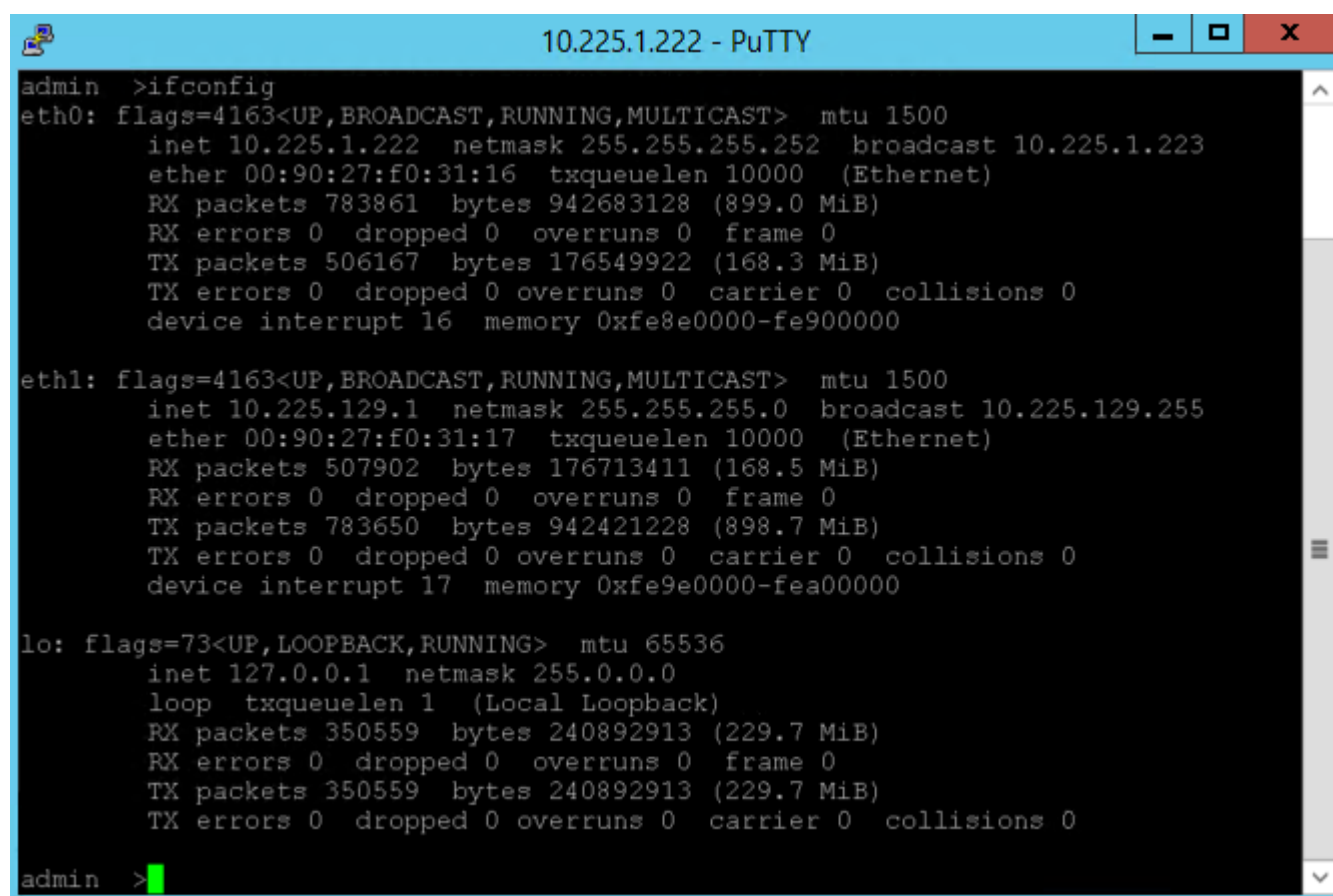

```
admin >ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.225.1.222 netmask 255.255.255.252 broadcast 10.225.1.223
    ether 00:90:27:f0:31:16 txqueuelen 10000 (Ethernet)
    RX packets 783861 bytes 942683128 (899.0 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 506167 bytes 176549922 (168.3 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 16 memory 0xfe8e0000-fe900000

eth1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.225.129.1 netmask 255.255.255.0 broadcast 10.225.129.255
    ether 00:90:27:f0:31:17 txqueuelen 10000 (Ethernet)
    RX packets 507902 bytes 176713411 (168.5 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 783650 bytes 942421228 (898.7 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 17 memory 0xfe9e0000-fea00000

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    loop txqueuelen 1 (Local Loopback)
    RX packets 350559 bytes 240892913 (229.7 MiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 350559 bytes 240892913 (229.7 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

admin >
```

SA



21:08

## Wi-Fi



Ativado



Piaui\_Conectado

Conectado



Piaui Conectado

Salva



4 – Teste de Velocidade

Download

