


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Rogerio Momi Frias Cliente: VIVO

Empresa
EMC BrasilVSAT-ID
VIVO-PER-27032876-ALLink kbps
256/128Plataforma
VSAT

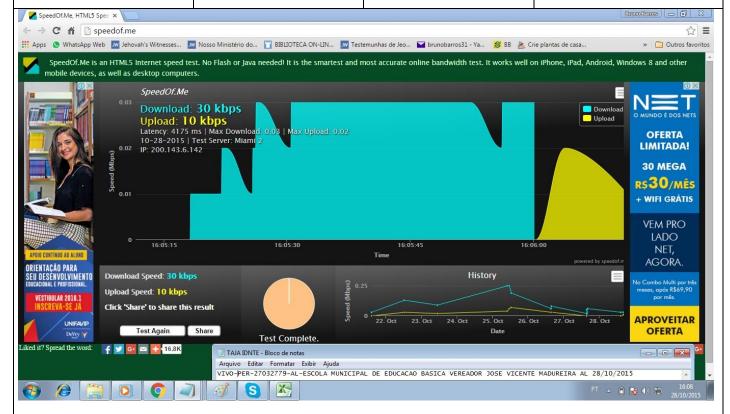

Satellite (DVB) RX Configuration

Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute

Idx Pri SymbRate[Msps] Freq[GHz] Mode Popld Enable * 0 0 9.320000 12.055825 DVB-S2 4 Yes

Satellite (DVB) Receiver Status

Rx State: On

DVB State : Forward link up

Network : 1326, GlobalIP@Telstar-14R

Frequency : 12.055884 GHz Symbol Rate : 9.320026 Msps

S2 ModCod

- receiving : 15 8PSK-5/6 - current max : 23 16APSK-9/10

Pilot : On
Frame length : Short
DVB S2 Mode : ACM

Roll off : 0.25 SNR : 15.1 dB Input Power : -24 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled IDU Output Power : -30 dBm IDU Max Output Power: 0.0 dBm ODU Output Power : 34.7 dBm

EIRP : 48.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression: None

Satellite (DVB) Transmitter Status

State : On (TDMA) IDU Output Power : -17.1 dBm ODU Output Power : 34.5 dBm : 47.8 dBW EIRP Eb/No : 14.0 dB

Header Compression: Disabled Timing correction : -319 us (262613 us)

Frequency correction: -80 Hz

ping 8.8.8.8

64 bytes from 8.8.8.8: time=870 ms 64 bytes from 8.8.8.8: time=940 ms 64 bytes from 8.8.8.8: time=790 ms 64 bytes from 8.8.8.8: time=590 ms 64 bytes from 8.8.8.8: time=620 ms

--- 8.8.8.8 ping statistics ---

5 packets transmitted, 5 received, 0.00 percent packet loss rtt min/avg/max = 590/760/940 ms